
#### **ORDER NO. ITD0207019C0**

D10 Canada: B07

# Service Manual

**Wide Plasma Display** 

TH-42PW5 / TH-42PWD5 / TH-37PW5 / TH-37PWD5
GP5D Chassis

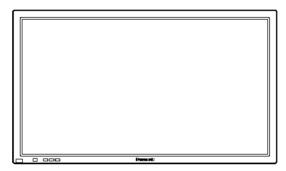

#### **SPECIFICATIONS**

#### **Specifications**

Power Source: AC120V 50/60Hz (UY/UZ version)

AC220-240V 50/60Hz

(Except UY/UZ version model)

Power Consumption: 225 W (37 inch), 295 W (42 inch)

2.4 W (stand-by condition)

(UY/UZ version)

2.8 W (stand-by condition)
(Except UY/UZ version model)
0.9 W (Power off condition)
(UY/UZ version model)
1.5 W (Power off condition)
(Except UY/UZ version model)

Plasma Display panel: Drive method AC type

16:9 aspect ratio

Contrast Ratio 3000:1

Screen size: 818 mm (W) x 461 mm (H)

939 mm (diagonal) (37 inch) 920 mm (W) × 518 mm (H) 1,056 mm (diagonal) (42 inch)

No. of pixels

408,960 (852 (W) × 480 (H))

[2,556 × 480 dots]

Operating condition:

Temperature 34 °F - 104 °F (0 °C - 40 °C)

Humidity 20 % - 80 %

Horizontal scanning frequency 15.6 -

110kHz

Vertical scanning frequency 48 - 120Hz

**Connection terminals:** 

ΑV

Video in 1.0 Vp-p (75-ohm)

S-VIDEO IN / (MINI DIN Y: 1 Vp-p (75-ohm), C: 0.286 Vp-p

4PIN) (75-ohm)

AUDIO IN / (RCA PIN 0.5 Vrms (high impedance)

JACK × 2)

COMPONENT/RGB

Y/G 1.0 Vp-p/composite (75-ohm)

0.7 Vp-p/non-composite (75-ohm)

PB /B 0.7 Vp-p (75-ohm)
PR /R 0.7 Vp-p (75-ohm)

HD 1.0 - 5.0 Vp-p (high impedance)
VD 1.0 - 5.0 Vp-p (high impedance)
AUDIO IN 0.5 Vrms (high impedance)

(RCA PIN JACK×2)

PC

(HIGH-DENSITY R,G,B/0.7 Vp-p (75-ohm)

D-SUB15PIN)

HD, VD/1.0 - 5.0 Vp-p (high

impedance)

AUDIO IN (M3 JACK) 0.5Vrms (high impedance)

**SERIAL** 

EXTERNAL CONTROL RS-232C COMPATIBLE

**TERMINAL (D-SUB9PIN)** 

SPEAKERS (External 16W [8W+8W] (10% THD)

speakers) (6  $\Omega$  )

Dimensions (W×H×D): 920 mm × 550 mm 89 mm) (37 inch)

1,020 mm × 610 mm 89 mm) (42 inch)

Weight (Mass) approx. 24.0 kg net (main unit only) (37

inch)

approx. 28.2 kg net (with speakers) (37

inch)

approx. 28.0 kg net (main unit only) (42

inch)

approx. 32.2 kg net (with speakers)

(42inch)

**Panasonic**®

# 1. Applicable signals

VIDEO	signal name	horizontal	vertital	1				
		frequency(kHz)	frequency(Hz)	1				
1	NTSC	15.734	59.95				_	
2	PAL	15.625	50	│	:			
3	PAL60	15.734	59.95	<b>⋖</b> Bv insta	lling the	optional		
4	SECAM	15.625	50		al Board.	•		
5	Modified NTSC	15.734	59.95					
COMP	ONENT/RGB/PC/DVI input			<u> </u>	-			
	signal name	horizontal frequency(kHz)	vertital frequency(Hz)	COMPONENT	RGB	PC	DVI	
1	525(480)/60i	15.734	59.94	*	*	*		
2	625(575)/50i	15.625	50	*	*	*		
3	525(480)/60p	31.468	59.94	*	*			
4	625(575)/50p	31.25	50	*	*	*		
5	750(720)/60p	45	60	*	*	*		
6	1125(1080)/60i	33.75	60	*	*	*		
7	1125(1080)/50i	28.125	50	*	*	*		
8	1125(1080)/24p	27	24	*	*	*		
9	1125(1080)/24sF	27	48	*	*	*		
10	640×400@70	31.5	70		*	*		
11	640×480@60	31.5	59.94		*	*	*	
12	Macintosh13"(640 × 480)	35	67		*	*		
13	640×480@75	37.5	75		*	*		
14	852×480@60	31.7	60		*	*	*	
15	800×600@60	37.9	60		*	*	*	
16	800×600@75	46.9	75		*	*		
17	800×600@85	53.7	85		*	*		
18	Macintosh16"(832 × 624)	49.7	75		*	*		
19	1,024×768@60	48.4	60		*	*	*	
20	1,024×768@70	56.5	70		*	*		
21	1,024×768@75	60	75		*	*		
22	1,024×768@85	68.7	85		*	*		
23	Macintosh21"(1,152×870)	68.7	75		*	*		
24	1,280×1,024@60	64	60		*	*		
25	1,280 × 1,024@75	80	75		*	*		
26	1,280×1,024@85	91.1	85		*	*		
27	1,600×1,200@60	75	60		*	*		

# 2. Safety Precautions

#### 2.1. General Guidelines

- 1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
- 2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
- 3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

#### 2.1.1. Leakage Current Cold Check

- 1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
- 2. Measure the resistance value, with an ohmmeter, between the

jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between 1M  $\Omega$  and 5.2M  $\Omega$ . / When the exposed metal does not have a return path to the chassis, the reading must be.

Hot-Check Circuit

AC VOLTMETER

TO

APPLIANCES
EXPOSED

METAL PARTS 1500Ω 10W

COLD
WATER PIPE
(EARTH GROUND)

#### 2.1.2. Leakage Current Hot Check (See Figure 1.)

- 1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
- 2. Connect a 1.5k  $\Omega$ , 10 watts resistor, in parallel with a 0.15  $\mu$  F capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
- 3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
- 4. Check each exposed metallic part, and measure the voltage at each point.
- 5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
- 6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

# 3. Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such

components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

- 1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, whichshould be removed for potential shock reasons prior to applying power to the unit under test.
- 2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- 3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
- 4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
- 5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
- 6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, alminum foil or comparableconductive material).
- 7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

#### Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing

together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient todamage an ES device).

#### IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are imporant for safety.

These parts are marked by  $\Delta$  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

# 4. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder. The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu). That is Tin (Sn), Silver (Ag) and (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.


PCBs manufactured using lead free solder will have the PbF within a leaf Symbol



stamped on the back of PCB.


#### Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is  $50 \sim 70 \,^{\circ}\text{F}$  (30~40 °C) higher. Please use a high temperature soldering iron and set it to  $700 \pm 20 \,^{\circ}\text{F}$  (370  $\pm 10 \,^{\circ}\text{C}$ ).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
  - If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

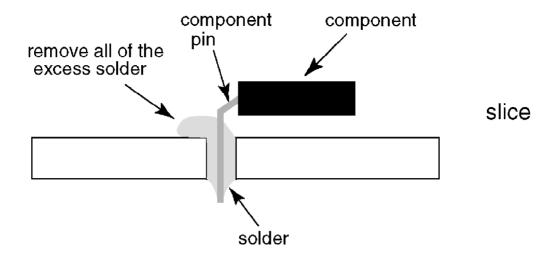

#### Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also beused.

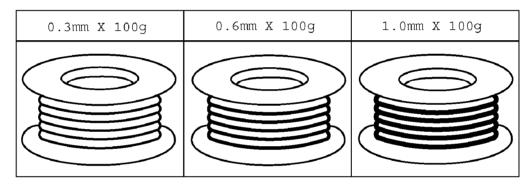


# 5. PCB Structure sheet of GP5D chassis


Board Name	Function	Remarks
D1	Format Converter	1
D2	Plasma Al Sub-Field Processor	1
Z	Audio out	
SS	Sustain Out	1
SC	Scan out	1
SU	Sustain connection (Upper)	1
SD	Sustain connection (Lower)	1
C1	Data Drive (Lower Right)	
C2	Data Drive (Lower Left)	
Н3	Speaker terminal	
S1	Power switch	
SS2	Sustain connection (Upper)	
SS3	Sustain connection (Lower)	
V1	Front SW. & Remote receiver	
F	Line filter	
Р	Power supply	1
нх	PC_type_Input terminal	
HY	BNC_type_Input terminal	2
HZ	RCA type_Input terminal	3

#### Remarks

- 1. Recommend PCB's for initial service for GP5D chassis.
- 2. For System model except BX, EX version
- 3. For Consumer model except BX, EX version
- 6. Service Hint

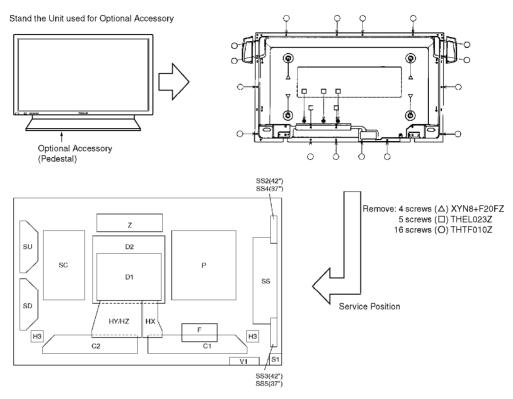

# 7. Location of Lead Wiring

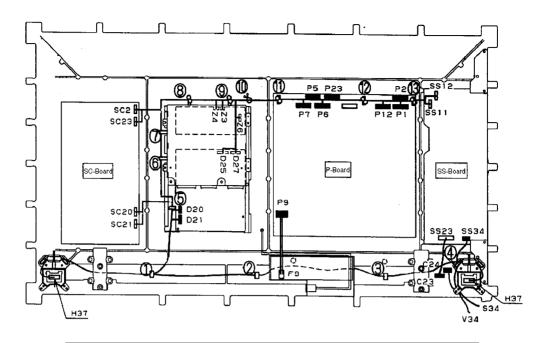

CON:NC	CON:NO	(1)	(2)	(3)	(4)	(5)	6	7	(8)	$(\mathfrak{G})$	$\bigcirc$	(1)	(12)	13)	()
SS12	— P12													$\bigcirc$	
SS11	— P1													$\bigcirc$	
SC2	— P2								$\bigcirc$	$\bigcirc$	$\bigcirc$		$\bigcirc$		
SC23	— P23								$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$		
Z6	— P6										$\bigcirc$	$\bigcirc$			
D25	— P5											$\bigcirc$			
D27	— P7											$\bigcirc$			
F9	— P9														
SC20	— D20					$\bigcirc$									
SC21	— D21					$\bigcirc$									
Z3	— H37 (SC) — H37 — (SS)					$\bigcirc$		$\bigcirc$	$\bigcirc$						
Z4	—— H37 (SS)	()	()			()			()						
S34	— SS34														
SS23	— C23														
V34	— C24														

Connector Connection P1,P2,P5,P6,P7,P9,P12,P23 D20,D21,Z3,Z4,H37(SS·SC) SS34,C23,C24,AC INLET

# 8. Adjustment Procedure

# 8.1. +B Set-up

## 8.1.1. Item / Preparation

# 1. Input a Grey scale signal.

2. Set the picture controls: -

Picture mode: Normal White balance: Normal

#### 8.1.2. Adjustments

Adjust and confirm indicated test point for the specified voltage.

#### Adjust

Name	Volume	Voltage	Test Point	Remarks
Vsus	R621	170V ±	P1 pin 3	UY/UZ
	R540	1V		Except UY/UZ
Vda	R646	67V ±	P12 pin	UY/UZ
	R537	0.5V	1	Except UY/UZ

#### Confirm

Name	Voltage	Test Point	Remarks
15V	15.3V ± 0.5V	P23 pin 2	
13V	13.3V ± 0.5V	P25 pin 5	
15V	15.2V ± 0.5V	P25 pin 1	
Audio 13V	12.5V ± 0.8V	P6 pin 1	
Audio-13V	-12.5V ± 0.8V	P6 pin 3	
5V	5.2V ± 0.3V	P25 pin 7	
STB 5V	5.0V ± 0.3V	P27 pin 4	
Fan 15V	15.0V ± 0.5V	P10 pin 1	
Fan 5V	5.2V ± 0.3V	P10 pin 4	
PFC	380V ± 15V	C447(+)	Except UY/ UZ

# 8.2. Driver Set-up

#### 8.2.1. Item / Preparation

1. Input an APL 100 % white signal.

2. Set the picture controls: -

Picture mode: Normal White balance: Cool

**Aspect: 16:9** 


#### 8.2.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS 170V ± 1V (SS)		R540 (P)	Except UY/UZ
			R621 (P)	UY/UZ
Vbk	TPVBK (SC)	155V ± 5V	R6443 (SC)	
Ve			R6774 (SS)	42inch Models
		153V ± 1V		37inch Models
Vset	TPVSET (SC)	218V ± 6V		
Vad	TPVAD (SC)	-90V ± 1V	R6477 (SC)	
Vscn	TPVSCN (SC)	Vad*+118V ± 2V		
Vda	TPVDA (SS)	67V ± 1V	R537 (P)	Except UY/UZ
			R646 (P)	UY/UZ

<sup>\*</sup>See the Panel label.

#### **Panel Label information**

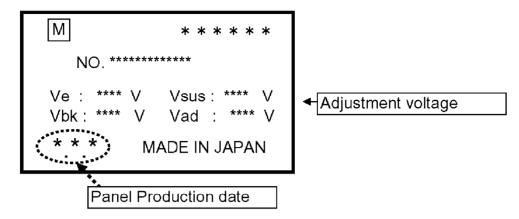

#### **Panel Production date**

For Example

<u>'ŀ</u>	n <del>c</del>			_
	1.	7.	1	> Beg. of July, 2001
T	Year	Month		
			1	Beginning of Month (1-10)
			2	Middle of Month (11-20)
			3	End of Month (21-31)
		1	January	, , , , , , , , , , , , , , , , , , ,
		2	February	
		3	March	
		:	:	
		9	September	
		0	October	
		N	November	
		D	December	
	9	1999		•
	0	2000		
1	1	2001		
L	1			
	· · · · · · · · · · · · · · · · · · ·	·	-	

## 8.3. Initialization Pulse Adjust

- 1. Input a Cross hatch signal.
- 2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Adjust the indicated test point for the specified wave form.

	Test point	Volume	Level
T1	TPSC1 (SC)	R6523 (SC)	20 ± 15 μ Sec
T2	TPSS1 (SS)	R6557 (SC)	170 ± 20 µ Sec

#### 8.4. P.C.B. (Printed Circuit Board) exchange

#### **8.4.1. Caution**


# 1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

### 8.4.2. Quick adjustment after P.C.B. exchange


P.C.B.	Name	Test Point	Voltage	Volume	Remarks	
P Board	Vsus	TPVSUS (SS)	170V ± 1V	R540 (P)	Except UY/UZ	
				R621 (P)	UY/UZ	
	Vda TPVDA (SS)		67V ± 1V	R537 (P)	Except UY/UZ	
				R646 (P)	UY/UZ	
SC Board	Vbk	TPVBK (SC)	155V ± 5V	R6443 (SC)		
	Vad	TPVAD (SC)	-90V ± 1V	R6477 (SC)		
SS Board	Ve	TPVE (SS)	150V ± 1V	R6774 (SS)	42inch Model	
			153V ± 1V		37inch Model:	
D1, D2 Board	White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signal					

<sup>\*</sup>See the Panel label.

## 8.5. Adjustment Volume Location

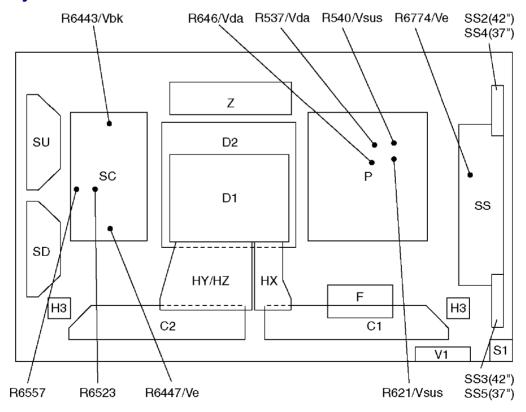


#### 8.6. Test Point Location

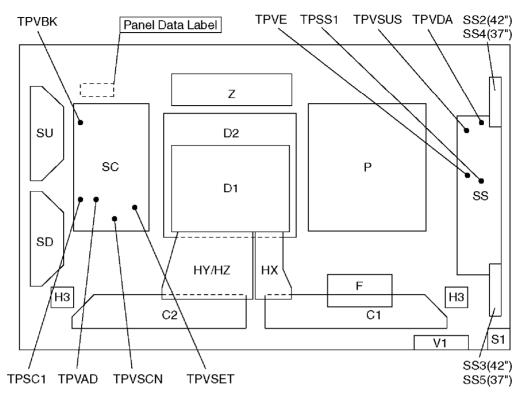


## 9. Service mode

## 9.1. CAT (computer Aided Test) mode

#### CAT mode menu

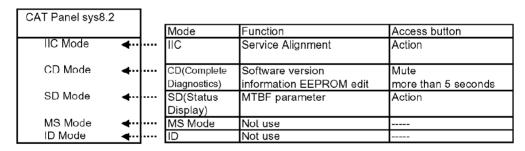

#### Remote control

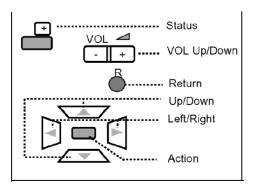

#### How to access the CAT mode.

Press and the hold the Volume down / - buton on the front panel of the unit and press the status button on the remote control 3 times quickly within 1 second, this will place the unit into the CAT mode.

To exit the CAT mode, access the ID mode and switch off the main power.

#### 9.1.1. IIC mode

Select the IIC mode by Up/Down button on the remote control at the front page of CAT mode then press the Action button on the remote control.

PAL: JUST Mid
Panel W/B Adj. --- Subject
R-Drive --- Item
D5 D5

New data
Original data

How to use the IIC mode.

- 1. Select the alignment **Subject** by **Up/Down buttons** on the remote control.
- 2 .Select the alignment **Item** by **Left/Right buttons** on the remote control.
- 3. Adjust **optimum setting** by **Volume Up/Down buttons** on the remote control.
- 4. The **data is memorized** when press the **R button** on the remote control or change the alignment Subject (or Items).


Subject and item are mentioned on page 14.

To exit the IIC mode, press the R button on the remote control.

#### 9.1.2. CD mode

Select the CD mode by Up/Down button on the remote control at the front page of CAT mode then press the Mute button on the remote control more than 5 sec.

<u>OSD</u>

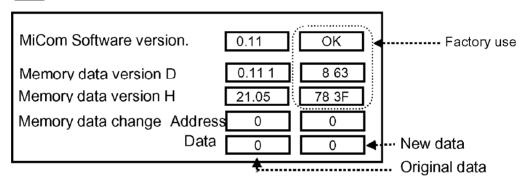


Micom software version (IC9354), this version can be upgrade by

#### 1. replace of new version IC

# 2. Loading the new version software from loader tool, TZSC07036.

#### Memory data change

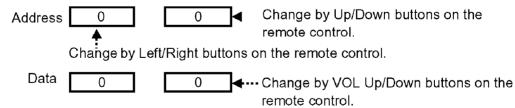


The data is memorized when switch off the main power.

To exit the CD mode, press the R button on the remote control.


#### 9.1.3. SD mode

Select the SD mode by Up/Down button on the remote control at the front page of CAT mode then press the Action button on the remote control.

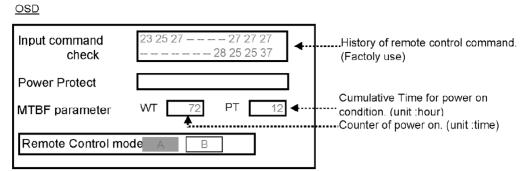

To exit the SD mode, press the R button on the remote control.

#### 9.2. IIC mode structure (following items value is sample data.)

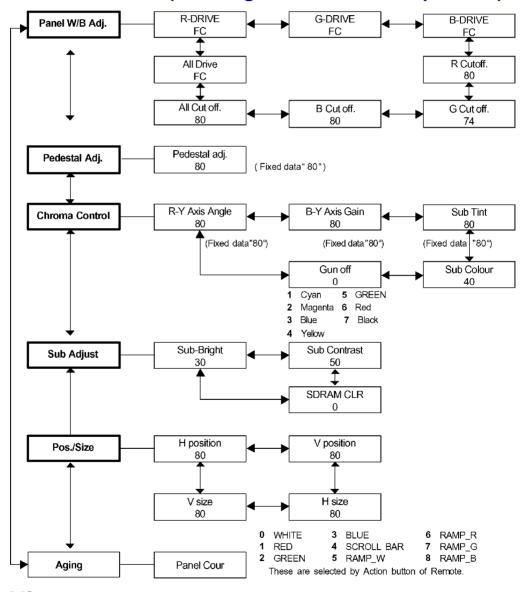

# 10. Alignment

# 10.1. Pedestal setting

#### Note:

OSD is the difference between UY/UZ model and Except UY/UZ model. / Picture:Normal (Except UY/UZ)/Standard (UY/UZ model) / White balance (Except UY/UZ)/Color Temp (UY/UZ model)

- 10.2. NTSC panel white balance
- 10.3. PAL/SECAM panel white balance
- 10.4. PC/RGB panel white balance
- 10.5. HD/ 525i /525p panel white balance
- 10.6. 625i panel balance
- 10.7. Sub brightness setting

# 11. Trouble shooting guide

#### 11.1. Self Check


#### 11.1.1. Display Indication

- 1. Self-check is used to automatically check the bus line controlled circuit of the Plasma display.
- 2. To get into the Self-check mode, press the volume down button on the customer controls at the front of the set, at the same time pressing the OFF-TIMER button on the remote control, and the screen will show:-

If the CCU ports have been checked and found to be incorrect Or not located then " - - " will appear in place of " OK "

#### Note:

In case of disconnected of H/HY/HZ "IC3699 - -" is displayed.

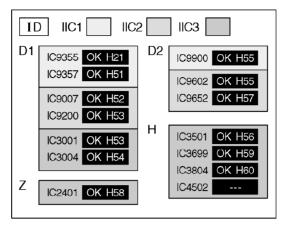

#### 11.1.2. Power LED Blinking timing chart

# 1. Subject

Information of LED Flashing timing chart.

#### 2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinkes of the Power LED on the front panel of the unit.

Blinking times	Blink timing	Contents & Check point
Twice	3 sec  → → → → → → → → → → → → → → → → → →	SC,SS,C board
Three		D board
Four	MMMM	P board (Check P7,P8 protection circuits)
Six		Fan circuit / Fan stop Check Pin3 of P10 to P13 connectors.

#### 3. Remarks

Above Fan function is operated during the fans are installed.

#### **11.2. No Power**

[First check point]


There are following 3 states of No Power indication by power LED.

#### 1. No lit


2. Green is lit then turns red blinking a few seconds later.

### 3. Only red is lit.


#### 1. No lit

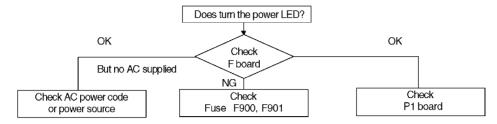

Drive circuits LED indicator

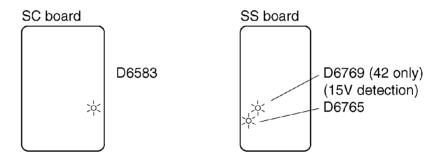


#### 11.3. No Picture

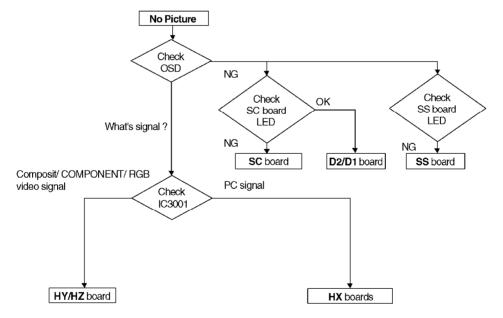

#### 11.4. Local screen failure

Plasma display may have local area failure on the screen. <u>Fig - 1</u> is the possible defect P.C.B. for each local area.

Fig - 1

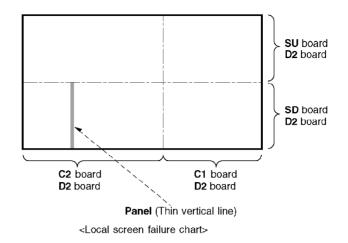

# 12. Option Setting

#### **Hidden Option Menu for GP5D series**

GP5D chassis series have special function and operation setting facility called Option Menu. This Option Menu is useful for special function required customers. This should be set at the installation stage. The end user could not set or change these becauseof hidden On screen menu.

Option menus	default setting	Contents		
Wobbling	Off	Wobbling operation On/Off. The outline of burnt image will be blurred by internimage sift.		
Off-timer function	Enable	Off-timer operation Enable/Disable.		
On Screen display On		Enable/Disable to display input mode indication a power on and no signal indication.		
Initial Input	Off	Sets the initial input mode when the power is turne Allow input mode selection while power is on.		
Initial VOL. level	Off	Sets the initial volume level when the power is turn Allow Volume control while power is on.		
Maximum VOL. Level	Off	Sets the maximum volume to desired level. Volume exceed this level.		
INPUT lock	Off	Fixes the input mode to AV, Component/RGB or PC not change input mode by input selection key.		
Button lock	Off	Enable/Disable front operation buttons (Input and/ovolume up/down)		
Studio W/B	Off	Set warm mode color temperature to 3,200 Kelvin.		

Option menus	default setting	Contents
Remocon User Level	Off	Remote key invalidation.
		Off : Valid key is all key of remote.
		User1 : Valid key are only Stand-by (ON/OFF), Inpu
		Status, Surround, Sound mute On/Off, and volume adjustment.
		User2: Valid key is only Stand-by (ON/OFF).
		User3 : All keys are null and void
ID Select	0 to 100	Set ID number from 001 to 100.
Remote ID	Off	Remote ID function On/Off.
		(While the Remote ID on, standard remote function control the unit.)
Serial	Off	Serial ID function On/Off

#### Note:

How to set Remocon User Level and Remote ID off

- 1. Access service mode (CAT-mode) and press SET UP key on remote.
- 2. Accsess Hidden option menu.
- 3. Change Remocon User Level and/ or Remote ID set to Off.

#### 13. Conductor Views

- 13.1. F-Board
- 13.2. P-Board (UY/UZ Version)
- 13.3. P-Board (Except UY/UZ Version)
- 13.4. HX-Board
- 13.5. HY-Board
- 13.6. HZ-Board
- 13.7. D1-Board
- 13.8. D2-Board
- 13.9. C1-Board (42 inch Models)
- **13.10. C1-Board (37 inch Models)**

- **13.11. C2-Board (42 inch Models)**
- **13.12. C2-Board (37 inch Models)**
- 13.13. SC-Board
- 13.14. SU-Board (42 inch Models)
- 13.15. SU-Board (37 inch Models)
- **13.16. SD-Board (42 inch Models)**
- 13.17. SD-Board (37 inch Models)
- 13.18. SS, SS2, SS3, SS4 and SS5-Board
- 13.19. **Z-Board**
- 13.20. H3, S1 and V1-Board

# 14. Block and Schematic Diagrams


- 14.1. Schematic Diagram Notes
- 14.2. Main Block Diagram
- 14.3. Power (UY/UZ Version) Block Diagram
- 14.4. F-Board Schematic Diagram
- 14.5. P-Board (UY/UZ Version) Schematic Diagram
- 14.6. Power (Except UY/UZ Version) Block Diagram
- 14.7. P-Board (1 of 2) (Except UY/UZ Version) Schematic Diagram
- 14.8. P-Board (2 of 2) (Except UY/UZ Version) Schematic Diagram
- 14.9. HX-Board Block Diagram
- 14.10. HX-Board Schematic Diagram
- 14.11. HY and HZ-Board Block Diagram
- 14.12. HY-Board (1 of 2) Schematic Diagram
- 14.13. HY-Board (2 of 2) Schematic Diagram

- 14.14. HZ-Board (1 of 2) Schematic Diagram
- 14.15. HZ-Board (2 of 2) Schematic Diagram
- 14.16. D1-Board Block Diagram
- 14.17. D1-Board (1 of 6) Schematic Diagram
- 14.18. D1-Board (2 of 6) Schematic Diagram
- 14.19. D1-Board (3 of 6) Schematic Diagram
- 14.20. D1-Board (4 of 6) Schematic Diagram
- 14.21. D1-Board (5 of 6) Schematic Diagram
- 14.22. D1-Board (6 of 6) Schematic Diagram
- 14.23. D2-Board Block Diagram
- 14.24. D2-Board (1 of 6) Schematic Diagram
- 14.25. D2-Board (2 of 6) Schematic Diagram
- 14.26. D2-Board (3 of 6) Schematic Diagram
- 14.27. D2-Board (4 of 6) Schematic Diagram
- 14.28. D2-Board (5 of 6) Schematic Diagram
- 14.29. D2-Board (6 of 6) Schematic Diagram
- 14.30. C1 and C2-Board Block Diagram
- 14.31. C1-Board (42 inch Models) Schematic Diagram
- 14.32. C1-Board (37 inch Models) Schematic Diagram
- 14.33. C2-Board (42 inch Models) Schematic Diagram
- 14.34. C2-Board (37 inch Models) Schematic Diagram
- 14.35. SC-Board Block Diagram
- 14.36. SC-Board (1 of 2) Schematic Diagram
- 14.37. SC-Board (2 of 2) Schematic Diagram
- 14.38. SD-Board Block Diagram

- 14.39. SD-Board (42 inch Models) Schematic Diagram
- 14.40. SD-Board (37 inch Models) Schematic Diagram
- 14.41. SU-Board Block Diagram
- 14.42. SU-Board (42 inch Models) Schematic Diagram
- 14.43. SU-Board (37 inch Models) Schematic Diagram
- 14.44. SS-Board Block Diagram
- 14.45. SS, SS2, SS3, SS4, SS5 and S1-Board Schematic Diagram
- 14.46. Z-Board Block Diagram
- 14.47. H3 and Z-Board Schematic Diagram


#### 15. Parts Location

15.1. Parts Location1

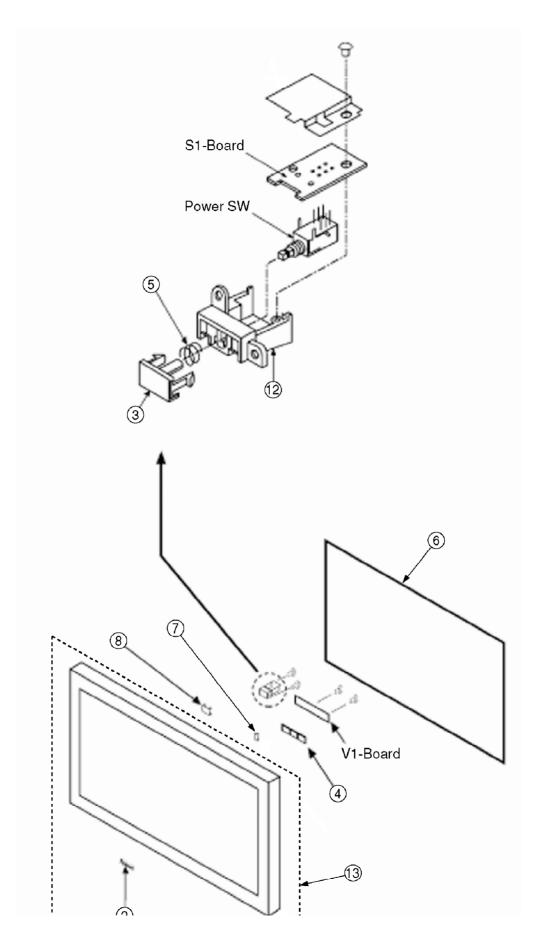




# 15.2. Parts Location2

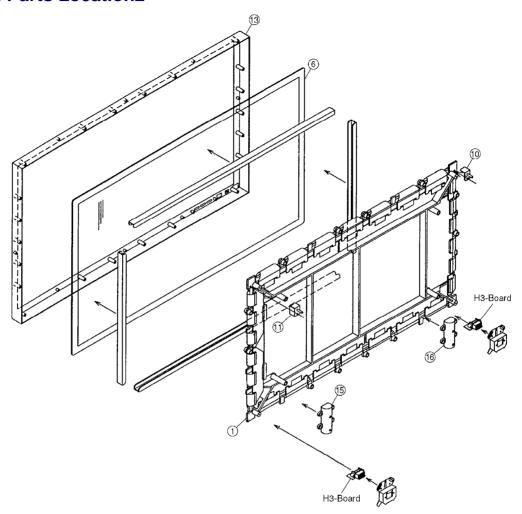

15.3. Parts Location3

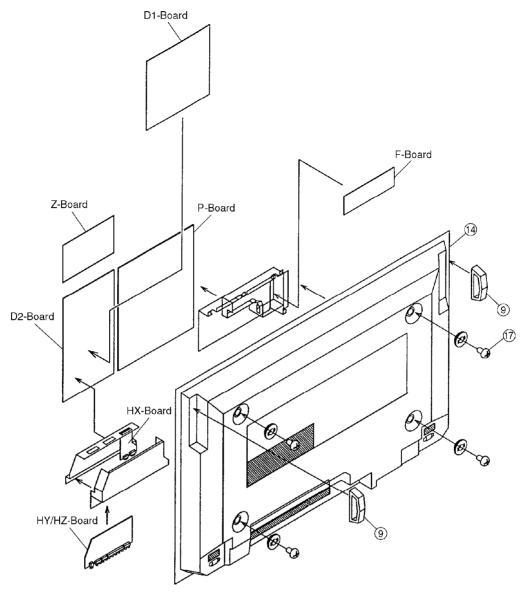

# 16. Mechanical Replacement Parts List

# 16.1. 42 inch Models Mechanical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	EUR646525	REMOTE CONTROL	1	
	J0KF00000018	FILTER	2	
	J0KG00000052	FILTER	1	
	J0KG0000052	FILTER	1	
	K2CG3DH00025	AC CORD	1	A.
				UY/UZ VERSION A
	K2CK3DH00013	AC CORD	1	AY/AZ VERSION 🗥
	K2CN3DH00004	AC CORD	1	EX/FY/FZ/RY/RZ VERSION A
	K2CT3DH00013	AC CORD	1	BX/HY/HZ VERSION A
	K5Y802B00001	FUSE	2	Δ
1	MD42S05A1J	PLASMA DISPLAY PANEL	1	
<u></u>				TH 40DMD AV/DV/EV/EV/HW/
2	TBMA008	PANASONIC BADGE	1	TH-42PWD5AY/BX/EX/FY/HY/ RY/UY
2	TBMA118	PANASONIC BADGE	1	TH-42PW5AZ/BX/EX/FZ/HZ/RZ/ UZ
<u> </u>	TBXA28201B	POWER BUTTON	1	TH-42PW5AZ/BX/EX/FZ/HZ/RZ
3	TBXA28202A	POWER BUTTON	1	TH-42PW5UZ,TH-42PWD5AY/ BX/EXFY/HY//RY/UY
<u> </u>	TBXA35901	HINDGE BUTTON	1	TH-42PW5AZ/BX/EX/FZ/HZ/RZ
1	TBXA35902	HINDGE BUTTON	1	TH-42PW5UZ,TH-42PWD5AY/ BX/EX/FY/HY/RY/UY
<u>i</u>	TESD031	SPRING	1	
	THEA068N	SCREW	4	
	THEL023Z	SCREW	9	
	THEL027N	SCREW	20	
	THTF003Y	SCREW	14	
<b>3</b>	TKGA5066	FRONT GLASS	1	EXCEPT UZ
<u>,                                     </u>	TKGA5106	FRONT GLASS	1	TH-42PW5UZ
<u>.</u>	TKKC5105	LED PANEL	1	111-421 W302
<u>-</u> <u>3</u>	TKPA43801	REMOCON RECEIVE PANEL	1	TH-42PW5AZ/BX/EX/FZ/HZ/RZ
3	TKPA43802	REMOCON RECEIVE PANEL	1	TH-42PW5UZ,TH-42PWD5AY/ BX/EX/FY/HY/RY/UY
	TKPA63401	PHOTO IC RECEIVE PANEL	1	
<u>9</u>	TKRA20501	HANDLE	2	
	TMKG250	INSULATOR	2	
	TMKG251-1	INSULATOR	2	
	TMM17499	CLAMPER	1	
	TMM25401	CLAMPER	2	
	TMM7464-2	CLAMPER	1	
	TMM7468-1	CLAMPER	1	
	TMMD006	SPACER	4	
10	TMMD007-1	BRACKET(RIGTH)	1	TMMD007
<u> 1</u>	TMMD008-1	BRACKET(LEFT)	1	TMMD008
	TMME047	CLAMPER	4	
	TMME061	CLAMPER	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TMME075	EADG SADOLE	2	
	TMME152	CLAMPER	2	
	TMME185	CLAMPER	2	
	TMME186	CLAMPER	2	
	TMME187	CLAMPER CLAMPER	2	
	TMME190 TMMX071	SPACER	12	
	I WIWAU7 I	GFAGER	12	
2	TMWC006-1	POWER BUTTOM BRACKET	1	
	TMWF003	BRACKET	1	
	TMZA5003	BRACKET	2	
	TPCA95857	CARTON BOX	1	A
	TPCA95858	CARTON BOX	1	TH-42PWD5UY 🗥
				TH-42PWD5EX 🛆
	TPCA95859	CARTON BOX	1	TH-42PWD5RY 🗥
	TPCA95860	CARTON BOX	1	TH-42PWD5BX △
	TPCA95861	CARTON BOX	1	TH-42PWD5HY
	TPCA95862	CARTON BOX	1	TH-42PWD5AY
	TPCA95863	CARTON BOX	1	TH-42PWD5FY
	TPCA95864	CARTON BOX	1	TH-42PW5UZ
	TPCA95865	CARTON BOX	1	TH-42PW5EX A
	TPCA95866	CARTON BOX	1	TH-42PW5EX
	TPCA95867	CARTON BOX	1	TH-42PW5BX
	TPCA95868	CARTON BOX	1	
			1	TH-42PW5HZ
	TPCA95869	CARTON BOX		TH-42PW5AZ 🛆
	TPCA95870	CARTON BOX	1	TH-42PW5FZ 🗥
	TPCA95901A	BOTTOM CARTON	1	
	TPD169487	JOINT	4	
	TPDA0510-1	CUSHION(UPPER RIGHT)	1	
	TPDA0511-1	CUSHION(UPPER LEFT)	1	
	TPDA0512	CUSHION(UPPER CENTER)	1	
	TPDA0513	CUSHION(BOTTOM RIGHT)	1	
	TPDA0514	CUSHION(BOTTOM LEFT)	1	
	TPD50505	CUSHION(BOTTOM CENTER)	1	
	TPDF0596	CUSHION	1	
	TPDF0737	PAPER BOX	1	
	TPEH170 TQBC0396	PROTECT COVER INSTRUCTION BOOK(ENGLISH)	1	A
		` '		TH-42PW5UZ 🗥
	TQBC0397	INSTRUCTION BOOK(FRENCH)	1	TH-42PW5UZ
	TQBC0398	INSTRUCTION BOOK(SPANISH)	1	TH-42PW5UZ 🗥
	TQBC0399	INSTRUCTION BOOK(ENGLISH)	1	TH-42PWD5UY
	TQBC0400	INSTRUCTION BOOK(FRENCH)	1	TH-42PWD5UY
	TQBC0401	INSTRUCTION BOOK(SPANISH)	1	TH-42PWD5UY
	TQBC0402-1	INSTRUCTION BOOK(ENGLISH)	1	TH-42PW5EX 🗥
	TQBC0403-1	INSTRUCTION BOOK(GERMAN)	1	TH-42PW5EX A
	TQBC0404-1	INSTRUCTION BOOK(FRENCH)	1	TH-42PW5EX A
	TQBC0405-1	INSTRUCTION BOOK(ITALIAN)	1	TH-42PW5EX 🛆

III TEL TIOLA

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TQBC0406-1	INSTRUCTION BOOK(SPANISH)	1	TH-42PW5EX ⚠
	TQBC0407-1	INSTRUCTION BOOK(DUTCH)	1	TH-42PW5EX 🕭
	TQBC0408-1	INSTRUCTION BOOK(DANISH)	1	TH-42PW5EX 🕭
	TQBC0409-1	INSTRUCTION BOOK(SWEDISH)	1	TH-42PW5EX 🕭
	TQBC0412-1	INSTRUCTION BOOK(FRENCH)	1	TH-42PWD5EX 🛆
	TQBC0413-1	INSTRUCTION BOOK(ITALIAN)	1	TH-42PWD5EX
	TQBC0415-1	INSTRUCTION BOOK(SPANISH)	1	TH-42PWD5EX A;
	TQBC0416-1	INSTRUCTION BOOK(DUTCH)	1	TH-42PWD5EX 🗥
	TQBC0417-1	INSTRUCTION BOOK(DANISH)	1	TH-42PWD5EX
	TQBC0418-1	INSTRUCTION BOOK(SWEDISH)	1	TH-42PWD5EX
	TQBC0419	INSTRUCTION BOOK(ENGLISH)	1	TH-42PW5AZ/HZ/RZ
	TQBC0420	INSTRUCTION BOOK(GERMAN)	1	TH-42PW5RZ A
	TQBC0421	INSTRUCTION BOOK(FRENCH)	1	TH-42PW5RZ A
	TQBC0422	INSTRUCTION BOOK(ITALIAN)	1	TH-42PW5RZ A
	TQBC0423	INSTRUCTION BOOK(SPANISH)	1	TH-42PW5RZ TH-42PW5RZ
	TQBC0424	INSTRUCTION BOOK(ENGLISH)	1	
	TQBC0425	INSTRUCTION BOOK(GERMAN)	1	TH-42PWD5AY/HY/RY 🗥
	TQBC0426	INSTRUCTION BOOK(FRENCH)	1	TH-42PWD5RY A
	TQBC0427	INSTRUCTION BOOK(ITALIAN)	1	TH-42PWD5RY 🗥
	TQBC0428	INSTRUCTION BOOK(SPANISH)	1	TH-42PWD5RY 🗥
		· · ·		TH-42PWD5RY 🛆
	TQBC0429	INSTRUCTION BOOK(ENGLISH)	1	TH-42PW5BX 📤
	TQBC0430	INSTRUCTION BOOK(ENGLISH)	1	TH-42PWD5BX
	TQBC0431	INSTRUCTION BOOK(KOREA)	1	TH-42PW5FZ 🕭
	TQBC0432	INSTRUCTION BOOK(KOREA)	1	TH-42PWD5FY 🛆
	TQBC0524	INSTRUCTION BOOK(RUSSIAN)	1	TH-42PW5RZ
	TQBC0525	INSTRUCTION BOOK(RUSSIAN)	1	TH-42PWD5RY 📤
	TQBC7060	SERVIS SENTER LIST	1	TH-42PW5UZ
	TSXL139 TSXL187	CABLE (FPC)(D31-C11/D32-C21)	6	
	TSXL222	CABLE (C12-C22)	1	
	TSXL231	CABLE	6	
42	TTE 4 0000	FECUTOUFON	1	TH-42PWD5AY/BX/EX/FY/HY/
<u>13</u>	TTEA0090	ESCUTCHEON	'	RY/UY
13	TTEA0091	ESCUTCHEON	1	TH-42PW5UZ 🗥
13	TTEA0092	ESCUTCHEON	1	TH-42PW5AZ/BX/EX/FZ/HZ/RZ
				<u>A</u>
14	TTUA0542	REAR COVER	1	TH-42PWD5UY
14	TTUA0543	REAR COVER	1	TH-42PWD5BX/EX 🗥
14	TTUA0544	REAR COVER	1	TH-42PWD5AY/HY/RY
14	TTUA0545	REAR COVER	1	TH-42PWD5FY
14	TTUA0546	REAR COVER	1	TH-42PW5UZ 📤
14	TTUA0547	REAR COVER	1	TH-42PW5BX/EX △
		<del>'</del>		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
14	TTUA0548	REAR COVER	1	TH-42PW5AZ/HZ/RZ
14	TTUA0549	REAR COVER	1	TH-42PW5FZ
	TXAJS010MMS	AC INLET	1	⚠
<u>15</u>	TXFMZ010JAS	STAND BLOCK	1	
	TXJSPL0LLS	SPEAKER LEAD	1	
	XTBT964	SCREW	2	
	XTS3+10J	SCREW	7	
	XYN3+F10	SCREW	6	
	XYN3+F10FZ	SCREW	14	
	XYN3+F6	SCREW	18	
	XYN3+F8	SCREW	88	
	XYN4+E8	SCREW	1	
	XYN4+F38FZ	SCREW	16	
	XYN5+C20	SCREW	8	
	XYN8+F20FZ	SCREW	4	
	XZBT6506	POLY BAG	1	

# 16.2. 37 inch Models Mechanical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	EUR646525	REMOTE CONTROL	1	
	J0KF00000018	FILTER	1	
	J0KG00000054	NOISE FILTER	2	
	K2CG3DH00025	AC CORD	1	UZ VERSION 🗥
	K2CK3DH00013	AC CORD	1	AZ VERSION A
	K2CN3DH00004	AC CORD	1	EX/FZ/RZ VERSION A
	K2CT3DH00013	AC CORD	1	BX/HZ VERSION A
	K5Y802B00001	FUSE	2	Δ
L	MD37S05A1J	PLASMA DISPLAY PANEL	1	
2	TBMA008	PANASONIC BADGE	1	TH-37PWD5AZ/BX/EXFZ/HZ/RZ /UZ
2	TBMA118	PANASONIC BADGE	1	TH-37PW5AZ/BX/EX/FZ/HZ/RZ/ UZ
<u>B</u>	TBXA28201B	POWER BUTTON	1	TH-37PW5AZ/BX/EX/FZ/HZ/RZ
3	TBXA28202A	POWER BUTTON	1	TH-37PW5UZ,TH-37PWD5AZ/ BX/EX/FZ/HZ/RZ/UZ
<u> </u>	TBXA35901	HINDGE BUTTON	1	TH-37PW5AZ/BX/EX/FZ/HZ/RZ
ļ	TBXA35902	HINDGE BUTTON	1	TH-37PW5UZ,TH-37PWD5AZ/ BX/EXFZ/HZ/RZ/UZ
<u>i</u>	TESD031	SPRING	1	
	THEA068N	SCREW	4	
	THEL023Z	SCREW	9	
	THEL027N	SCREW	11	
	THEL027N	SCREW	8	
	THTF003Y	SCREW	18	
	THTF010Z	SCREW	16	
<u> </u>	TKGA5073	FRONT GLASS	1	EXCEPT TH-37PW5UZ
5	TKGA5109	FRONT GLASS	1	TH-37PW5UZ
<u>'</u>	TKKC5105	LED PANEL	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
<u>3</u>	TKPA43801	REMOCON RECEIVE PANEL	1	TH-37PW5AZ/BX/EX/FZ/HZ/RZ
8	TKPA43802	REMOCON RECEIVE PANEL	1	TH-37PW5UZ,TH-37PWD5AZ/ BX/EX/FZ/HZ/RZ/UZ
	TKPA63401	PHOTO IC RECEIVE PANEL	1	
9	TKRA20501	HANDLE	2	
	TMM25401	CLAMPER	3	
	TMM7464-2	CLAMPER	1	
	TMM7468-1	CLAMPER	1	
10	TMMD007-1	BRACKET(RIGTH)	1	TMMD007
<u> 1</u>	TMMD008-1	BRACKET(LEFT)	1	TMMD008
	TMME047	CLAMPER	4	
	TMME061	CLAMPER	2	
	TMME152	CLAMPER	2	
	TMME187	CLAMPER	2	
	TMME189	CLAMPER	1	
	TMME189	CLAMPER	1	
	TMME190	CLAMPER	1	
12	TMWC006-1	POWER BUTTOM BRACKET	1	
	TMWF003	BRACKET	1	
	TMXA042	FRONT PANEL HOLDER(R/L)	1	
<u>15</u>	TMZX5017	STAND BRACKET	1	
	TPCB14017	CARTON BOX	1	TH-37PWD5UZ 📤
	TPCB14018	CARTON BOX	1	TH-37PWD5EX 🗥
	TPCB14019	CARTON BOX	1	TH-37PWD5RZ △
	TPCB14020	CARTON BOX	1	TH-37PWD5BX ≜
	TPCB14021	CARTON BOX	1	TH-37PWD5HZ ≜
	TPCB14022	CARTON BOX	1	TH-37PWD5AZ 🗥
	TPCB14023	CARTON BOX	1	TH-37PWD5FZ
	TPCB14024	CARTON BOX	1	TH-37PW5UZ 🗥
	TPCB14025	CARTON BOX	1	TH-37PW5EX 🗥
	TPCB14026	CARTON BOX	1	TH-37PW5RZ
	TPCB14027	CARTON BOX	1	TH-37PW5BX ⚠
	TPCB14028	CARTON BOX	1	TH-37PW5HZ ⚠
	TPCB14029	CARTON BOX	1	TH-37PW5AZ 🗥
	TPCB14030	CARTON BOX	1	TH-37PW5FZ ≜
	TPCB14101	CARTON BOX (BOTTOM)	1	
	TPD169487	JOINT	4	
	TPDA0510-1	CUSHION(UPPER RIGHT)	1	
	TPDA0511-1	CUSHION(UPPER LEFT)	1	
	TPDA0512	CUSHION(UPPER CENTER)	1	
	TPDA0513	CUSHION(BOTTOM RIGHT)	1	
	TPDA0514	CUSHION(BOTTOM LEFT)	1	
	TPDA0515-2	CUSHION(BOTTOM CENTER)	1	
	TPDF0737	PAPER BOX	1	
	TPDF0745	CUSHION	1	
	TPEH007-3	PROTECT COVER	1	
	TQBC0396	INSTRUCTION BOOK(ENGLISH)	1	TH-37PW5UZ ⚠
	TQBC0397	INSTRUCTION BOOK(FRENCH)	1	TH-37PW5UZ 📤
	TQBC0398	INSTRUCTION BOOK(SPANISH)	1	TH-37PW5UZ

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TQBC0402-1	INSTRUCTION BOOK(ENGLISH)	1	TH-37PW5EX ▲
	TQBC0403-1	INSTRUCTION BOOK(GERMAN)	1	TH-37PW5EX
	TQBC0404-1	INSTRUCTION BOOK(FRENCH)	1	TH-37PW5EX
	TQBC0405-1	INSTRUCTION BOOK(ITALIAN)	1	TH-37PW5EX 🗥
	TQBC0406-1	INSTRUCTION BOOK(SPANISH)	1	TH-37PW5EX 🗥
	TQBC0407-1	INSTRUCTION BOOK(DUTCH)	1	TH-37PW5EX
	TQBC0408-1	INSTRUCTION BOOK(DANISH)	1	TH-37PW5EX
	TQBC0409-1	INSTRUCTION BOOK(SWEDISH)	1	TH-37PW5EX 🗥
	TQBC0419	INSTRUCTION BOOK(ENGLISH)	1	TH-37PW5AZ/HZ/RZ
	TQBC0420	INSTRUCTION BOOK(GERMAN)	1	TH-37PW5RZ
	TQBC0421	INSTRUCTION BOOK(FRENCH)	1	TH-37PW5RZ 🗥
	TQBC0422	INSTRUCTION BOOK(ITALIAN)	1	TH-37PW5RZ A
	TQBC0423	INSTRUCTION BOOK(SPANISH)	1	TH-37PW5RZ A
	TQBC0429	INSTRUCTION BOOK(ENGLISH)	1	TH-37PW5BX 🛧
	TQBC0431	INSTRUCTION BOOK(KOREA)	1	TH-37PW5BX
	TQBC0433	INSTRUCTION BOOK(ENGLISH)	1	· .
	TQBC0434	INSTRUCTION BOOK(FRENCH)	1	TH-37PWD5UZ
	TQBC0435	INSTRUCTION BOOK(SPANISH)	1	TH-37PWD5UZ
	TQBC0436	INSTRUCTION BOOK(ENGLISH)	1	TH-37PWD5UZ 🗥
		, ,	1	TH-37PWD5EX 🗥
	TQBC0437	INSTRUCTION BOOK(GERMAN)		TH-37PWD5EX 🛆
	TQBC0438	INSTRUCTION BOOK(FRENCH)	1	TH-37PWD5EX 🛆
	TQBC0439	INSTRUCTION BOOK(ITALIAN)	1	TH-37PWD5EX
	TQBC0440	INSTRUCTION BOOK(SPANISH)	1	TH-37PWD5EX 🗥
	TQBC0441	INSTRUCTION BOOK(DUTCH)	1	TH-37PWD5EX 🕭
	TQBC0442	INSTRUCTION BOOK(DANISH)	1	TH-37PWD5EX 📤
	TQBC0443	INSTRUCTION BOOK(SWEDISH)	1	TH-37PWD5EX △
	TQBC0444	INSTRUCTION BOOK(ENGLISH)	1	TH-37PWD5AZ/HZ/RZ 🗥
	TQBC0445	INSTRUCTION BOOK(GERMAN)	1	TH-37PWD5RZ
	TQBC0446	INSTRUCTION BOOK(FRENCH)	1	TH-37PWD5RZ
	TQBC0447	INSTRUCTION BOOK(ITALIAN)	1	TH-37PWD5RZ
	TQBC0448	INSTRUCTION BOOK(SPANISH)	1	TH-37PWD5RZ
	TQBC0449	INSTRUCTION BOOK(ENGLISH)	1	TH-37PWD5BX ⚠
	TQBC0452	INSTRUCTION BOOK(KOREA)	1	TH-37PWD5FZ 🕭
	TQBC0524	INSTRUCTION BOOK(RUSSIAN)	1	TH-37PW5RZ
	TQBC0526	INSTRUCTION BOOK(RUSSIAN)	1	TH-37PWD5RZ
	TQBC7060-1	SERVICE CENTER LIST	1	TH-37PW5UZ
	TSXL139	CABLE	6	
	TSXL187	CABLE(FPC)(D31-C11/D32-C21)	2	
	TSXL222	CABLE (C12-C22)	1	
	TSXL231	CABLE	6	
	TTEA0094	ESCUTCHEON	1	TH-37PWD5AZ/BX/EX/FZ/HZ

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
13	TTEA0095	ESCUTCHEON	1	TH-37PW5UZ ⚠
13	TTEA0096	ESCUTCHEON	1	TH-37PW5AZ/BX/EX/FZ/HZ/RZ
<u>14</u>	TTUA0552	REAR COVER	1	TH-37PWD5UZ
14	TTUA0553	REAR COVER	1	TH-37PWD5BX/EX
14	TTUA0554	REAR COVER	1	TH-37PWD5AZ/HZ/RZ 📤
14	TTUA0555	REAR COVER	1	TH-37PWD5FZ ≜
14	TTUA0556	REAR COVER	1	TH-37PW5UZ ⚠
14	TTUA0557	REAR COVER	1	TH-37PW5BX/EX ⚠
14	TTUA0558	REAR COVER	1	TH-37PW5AZ/HZ/RZ
14	TTUA0559	REAR COVER	1	TH-37PW5FZ ⚠
	TXAJS010MMS	AC INLET	1	K2AH3H000021 🗥
	TXFMX020MRS	PLATE(FRONT GLASS/UPPER)	1	
	TXFMX030MRS	PLATE(FRONT GLASS/BOTTOM)	1	
	TXFMX040MRS	PLATE(FRONT GLASS/R/L)	2	
	TXJSPL0LLS	SPEAKER LEAD(H37-Z4)	1	
	TXJSPR0MMS	SPEAKER LEAD(H37-Z3)	1	
	XTB4+10A	SCREW	19	
	XTBT964	SCREW	2	
	XTS3+10J	SCREW	9	
	XTV3+6J	SCREW	2	
	XYN3+F10	SCREW	6	
	XYN3+F10FZ	SCREW	2	
	XYN3+F8	SCREW	87	
	XYN4+E8	SCREW	1	
	XYN5+C20	SCREW	8	
	XYN8+F20FZ	SCREW	4	
	XZBT6506	POLY BAG	1	

# 17. Replacement Parts List

# 17.1. Relpacement Parts List Notes

## **Important Safety Notice**

Components identified by Amark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

## RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor2. CapacitorExample:Example:

ERD25TJ104 <u>C</u> 100KOHM, <u>J</u>, 1/4W ECKF1H103ZF <u>C</u> 0.01UF, <u>Z</u>, 50V

Type Allowance Type Allowance

Туре	Allowance		
C: Carbon F: Fuse M: Metal Oxide Metal FIIm S: Solid W: Wire Wound	F:±1% G:±2% J:±5% K:±10% M:±20%		

Туре	Allowance
C : Ceramic E : Electrolytic P : Polyester Polyprop lene T : Tantalum	C:±0.25pF D:±0.5pF F:±1pF G:±3pF J:±5pF K:±10pF L:±15pF M:±20pF P:+100%,-0% Z:+80%,-20%

## 17.2. 42 inch Models (UY/ UZ Version) Electrical Replacement List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C11	K1MN80B00002	CONNECTOR	1	
C12	K1MN20B00043	CONNECTOR	1	
C21	K1MN80B00002	CONNECTOR	1	
C21	K1MN20B00043	CONNECTOR	1	
			-	
C23	K1KA11A00102	11P CONNECTOR	1	
C24	K1KA08A00232	8P CONNECTOR	1	
C081	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C502	ECQE6473KF	P 0.047UF, K,630V	1	
C503	ECKD3D101KBP	C 100PF, K, 2KV	1	
C504	ECKD3D102KBP	C 1000PF, K, 2KV	1	
C505-07	ECKDAE472ZE	C 4700PF, Z,	3	$\Delta$
C508,09	EETHC2D122K	E 1200UF, 200V	2	
C510	ECKF1H471KB	C 470PF, K, 50V	1	
C511	ECQB1H221KF	P 220PF, K, 50V	1	
C512	ECA1EHG221	E 220UF, 25V	1	
C513	ECA1EHG101	E 100UF, 25V	1	
C514	EETHC2D102K	E 1000UF, 200V	1	
C517,18	ECKD3D152KBP	C 1500PF, K, 2KV	2	
C519	ECA1EHG221	E 220UF, 25V	1	
C520	ECKF1H471KB	C 470PF, K, 50V	1	
C521	ECKDNA102MB	C 1000PF, Z,	1	Δ
C522	ECQB1H221KF	P 220PF, K, 50V	1	
C523	ECA1EHG221	E 220UF, 25V	1	
C524-26	ECKDAE472ZE	C 4700PF, Z,	3	Δ
C527	ECA2DHG220	E 22UF, 200V	1	
C528	ECKD2H821KB2	C 820PF, K,500V	1	ECKD2H821KB5
C529,30	ECQV1H104JM	P 0.1UF, J, 50V	2	
C531	ECA1EHG470	E 47UF, 25V	1	
C532	ECA1HHG220	E 22UF, 50V	1	
C601,02	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C603	ECA1EHG471	E 470UF, 25V	1	
C604	ECA1EHG101	E 100UF, 25V	1	
C605,06	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C607	ECA1EHG101	E 100UF, 25V	1	
C608	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C609	ECKD3D122KBP	C 1200PF, K, 2KV	1	
C611,12	EETHC2D182L	E 1800UF, 200V	2	
C613	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C614	ECA1EHG101	E 100UF, 25V	1	
C615	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C616	ECQB1H103JF	P 0.01UF, J, 50V	1	
C617	EEUEB1E101	E 100UF, 25V	1	
C618	ECKD3A101KBP	C 100PF, K, 1KV	1	
C619	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
	ECA1HHG101	E 100UF, 50V	1	
C620 C621	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
JU2 1	LOIN HITOSEF		1	
C622	ECKD3A101KBD			i .
C622 C623	ECKD3A101KBP ECQB1H103JF	C 100PF, K, 1KV	-	
C623	ECQB1H103JF	P 0.01UF, J, 50V	1	
C623 C624,25	ECQB1H103JF ECA1EHG222	P 0.01UF, J, 50V E 2200UF, 25V	1 2	
C623 C624,25 C626	ECQB1H103JF ECA1EHG222 ECQB1H103JF	P 0.01UF, J, 50V E 2200UF, 25V P 0.01UF, J, 50V	1 2 1	
C623 C624,25	ECQB1H103JF ECA1EHG222	P 0.01UF, J, 50V E 2200UF, 25V	1 2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C630	ECQB1H103JF	P 0.01UF, J, 50V	1	
C631	ECKD3A471KBP	C 470PF, K, 1KV	1	
C632	ECQV1H105JM	P 1UF, J, 50V	1	
C633	ECKD3A101KBP	C 100PF, K, 1KV	1	
C634	ECA1EHG472	E 4700UF, 25V	1	
C635	ECQB1H103JF	P 0.01UF, J, 50V	1	
C636	EEUFC0J122	E 1200UF, 6.3V	1	
C637	EETHC2C821B	E 820UF, 160V	1	
C638	ECKD2H103ZU	C 0.01UF, Z,500V	1	
C639	ECQB1H222JF	P 2200PF, J, 50V	1	
C640,41	EEUFC1V151	E 150UF, 35V	2	
C642,43	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C645	ECA1AHG471	E 4700UF, 10V	1	
C646	ECKD2H561KB2	C 560PF, K,500V	1	
C647	EEUFC1C471	E 470UF, 16V	1	
C648	ECA1EHG470	E 47UF, 25V	1	
C649	ECKD2H561KB2	C 560PF, K,500V	1	
C650	ECA1EHG102	E 1000UF, 25V	1	
C651	ECA1EHG470	E 47UF, 25V	1	
C652,53	ECKF1H223ZF	C 0.022UF, Z, 50V	2	
C900,01	ECQU2A224BN9	P 0.22UF, 250V	2	Δ
C902	ECQU2A105BN9	P 1UF, 250V	1	<u>A</u>
C903-06	ECKCNA221KB7	C 220PF, M,	4	Δ
C2312	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2313	ECA1HHG470	E 47UF, 50V	1	
C2314	EEVHB1C470	E 47UF, 16V	1	
C2316,17	ECQV1H474JM	P 0.47UF, J, 50V	2	
C2318,19	ECJ2XC1H561J	C 560PF, J, 50V	2	
C2320-22	ECJ2VF1H104Z	C 0.1UF, Z, 50V	3	
C2323	ECA1HHG221	E 220UF, 50V	1	
C2324	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2325	ECA1HHG221	E 220UF, 50V	1	
C2326,27	ECJ2XC1H221J	C 220PF, J, 50V	2	
C2328,29	ECJ2VF1H104Z	C 0.1UF, Z, 50V	2	
C2330	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2331	ECJ2XC1H101J	C 100PF, J, 50V	1	
C2332	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2333	ECJ2XC1H101J	C 100PF, J, 50V	1	
C2334,35	TCUY1C225KBM	C 2.2UF, 16V	2	F1K1C225A026
C2336,37	ECJ2XB1H473K	C 0.047UF, K, 50V	2	
C2338,39	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2340-43	ECJ2VF1H104Z	C 0.1UF, Z, 50V	4	
C2344-47	EEUGZ1D102SB	E 1000UF, 20V	4	
C2348	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2349,50	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2349,30 C2417	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C2417 C2419	EEVHB1C100	E 10UF, 16V	1	
	ECJ3XF1C475Z	•	1	
C2422		C 4.7UF, Z, 16V	1	
C2423	ECJ2XB1H103K	C 0.01UF, K, 50V		
C2426	ECJ2XB1H153K	C 0.015UF, K, 50V	1	
C2427	EEVHB1C100	E 10UF, 16V	1	
C2429	EEAGA1C101	E 100UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2433	ECJ2XB1H393K	C 0.039UF, K, 50V	1	
C2434	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C2435	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2436	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2437,38	EEAGA1C101	E 100UF, 16V	2	
C2440,41	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2442	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2450	EEVHB1C100	E 10UF, 16V	1	
C2451	EEVHB1E4R7	E 4.7UF, 25V	1	EEVHB1E4R7R
C2452	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2453	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2454	EEVHB1E4R7	E 4.7UF, 25V	1	EEVHB1E4R7R
C2457	EEVHB1E4R7	E 4.7UF, 25V	1	EEVHB1E4R7R
C2458	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2459	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2460	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2461	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2463	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2466,67	ECJ3VB1C104K	C 0.10UF, K, 16V	2	
C2480	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2484	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3001-03	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3001-03	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3004 C3005-07	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3003-07	ECJ1VF1H103Z		2	
C3008,09 C3010-12	ECJ2VF1C105Z	C 0.01UF, Z, 50V	3	
	ECJ1VF1H103Z	C 1UF, Z, 16V	2	
C3013,14		C 0.01UF, Z, 50V		
C3015-17	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3018	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3019	EEVHB1C470	E 47UF, 16V	1	
C3020	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3021	EEVHB1C470	E 47UF, 16V	1	
C3022	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3023	EEVHB1C470	E 47UF, 16V	1	
C3024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3026	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3027	EEVHB1C470	E 47UF, 16V	1	
C3028	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3029	EEVHB1C470	E 47UF, 16V	1	
C3030,31	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3032	EEVHB1C470	E 47UF, 16V	1	
C3033-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3036	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3037-39	EEVHB1C470	E 47UF, 16V	3	
C3040,41	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3042	EEVHB1C470	E 47UF, 16V	1	
C3049,50	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C3301,02	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C3303,04	EEVHB1C470	E 47UF, 16V	2	
C3305	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3306,07	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3309	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3310	EEVHB1C470	E 47UF, 16V	1	
C3311	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3312,13	EEVHB1C470	E 47UF, 16V	2	
C3314	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3351,52	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3353-60	ECJ2VF1C105Z	C 1UF, Z, 16V	8	
C3361	EEVHB1C470	E 47UF, 16V	1	
C3362	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3363	EEVHB1C470	E 47UF, 16V	1	
C3364	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3365	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3404	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3405	EEVHB1C470	E 47UF, 16V	1	
C3406	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3407	EEVHB1C470	E 47UF, 16V	1	
C3409	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3410	EEVHB1C470	E 47UF, 16V	1	
C3501	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3502	EEVHP1E220	E 22UF, 25V	1	
C3502	EEVHP1E100	E 10UF, 25V	2	
C3505,04	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3506	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C3507	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	111000007000
C3509-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3516-18	EEVHB1C470	E 47UF, 16V	3	
C3510-18	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3520	EEVHB1C470	E 47UF, 16V	1	
C3521	EEVHB1C470	-	1	
C3524	ECJ2VF1H103Z	E 47UF, 16V	1	
		C 0.01UF, Z, 50V		
C3529-31	ECJ3XB0J106M	C 10UF, M,6.3V	3	
C3533,34	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3542	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3544	EEVHB1C470	E 47UF, 16V	1	
C3550	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3551	EEVHB1C470	E 47UF, 16V	1	
C3561,62	ECJ2VF1C105Z	C 1UF, Z, 16V	2	E4 14 04 0 E 0 0 0 0
C3591,92	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3593	ECJ2VF1E104Z	C 0.1UF, Z, 25V	1	
C3594,95	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3700	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3702	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3703	EEVHB1C470	E 47UF, 16V	1	
C3704	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3706	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3708	EEVHB0G221	E 220UF, 4V	1	
C3709	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3710-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3714	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3715	EEVHB0G221	E 220UF, 4V	1	1
C3716	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3717,18	EEVHB1C470	E 47UF, 16V	2	
C3723	EEVHB1C470	E 47UF, 16V	1	
C3726	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3727,28	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3729	ECJ2XB1H471K	C 470PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3801	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3802	EEVHB1C470	E 47UF, 16V	1	
C3803	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3804	ECJ1XC1H470J	C 47PF, J, 50V	1	
C3805	ECJ1XC1H220J	C 22PF, J, 50V	1	
C3806	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3808	EEVHP1E220	E 22UF, 25V	1	
C3809	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3810	EEVHB0J220	E 22UF 6.3V	1	EEVHB0J220R
C3812	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3815	EEVHB1C470	E 47UF, 16V	1	
C3816	EEVHP1E100	E 10UF, 25V	1	
C3817	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3818	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3819	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3820	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3821	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3823	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3824,25	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3828,29	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3830,31	ECJ1XC1H180J	C 18PF, J, 50V	2	
C3832-34	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3835	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3836-38	ECJ2VF1C105Z	C 1UF, Z, 16V	3	FIROUSSSAUUS
C3840	ECJ2VF1C105Z ECJ2VF1C105Z		1	
C3841	TCUY0J335MBM	C 1UF, Z, 16V	1	F1K0J335A003
		C 3.3UF, 6.3V	1	FIRUJSSSAUUS
C3842	ECJ1XB1C104K	C 0.1UF, Z, 16V		
C3843	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3844	EEVHB0J152	E 1500UF, 6.3V	1	
C3845,46	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3848-50	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3852,53	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3854	ECJ1VC1H080C	C 8PF, C, 50V	1	
C3855-57	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3858	EEVHB0G221	E 220UF, 4V	1	
C3859,60	EEVHB0J152	E 1500UF, 6.3V	2	
C3861	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3862	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3863	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3864	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3865	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3866	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3867	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3868	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3869	ECJ1XC1H330J	C 33PF, J, 50V	1	
C3870,71	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3872	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3873	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3874	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3875	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3876	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C3877	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3878-83	ECJ2VF1C105Z	C 1UF, Z, 16V	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3884	ECJ1VB1H153K	C 0.15UF, K, 50V	1	
C3885	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3886	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3887	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3888	ECJ1XC1H101J	C 100PF, J, 50V	1	
C3889	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C3890	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C3891,92	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3893	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3894	EEVHB0G221	E 220UF, 4V	1	
C3896	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3897	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3898	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3899	ECJ1XC1H330J	C 33PF, J, 50V	1	
C4518	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C4551	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6401-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6411	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6412	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6417	ECJ2XB1H221K	C 220PF, K, 50V	1	
C6421	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6422	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6427	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6429	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6431	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6433	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6452	ECJ2XB1H103K	C 0.01UF, K, 50V	1	1 12211040002
C6453	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6454	ECJ2XB1H103K	C 0.01UF, K, 50V	1	F131C1030000
C6455	EEUFC1E221	E 220UF, 25V	1	
C6456	ECA2CM101		1	
		E 100UF, 160V E 220UF, 25V	1	
C6457	EEUFC1E221 ECJ4XB1E475M	· ·		
C6458		C 4.7UF, M, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	EEUFC1E221	E 220UF, 25V	1	
C6462,63	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6464,65	ECA2CHG2R2	E 2.2UF, 160V	2	
C6472	ECJ2XB1H103K	C 0.01UF, K, 50V	1	E4.14.04.0F0000
C6473	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2AHG470	E 47UF, 100V	1	
C6481-88	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6490,91	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6492	ECA2VHG100	E 10UF, 350V	1	
C6493	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6501-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6511,12	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6513	ECA2CM101	E 100UF, 160V	1	
C6521	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6522	EEUFC1E470	E 47UF, 25V	1	
C6524,25	ECJ3FC2D102J	C 1000PF, J,200V	2	
C6526	ECA2EHG4R7	E 4.7UF, 250V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6529	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6534	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6540	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6541,42	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6543,44	ECJ3FC2D102J	C 1000PF, J,200V	2	
C6545	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6546	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6547	ECJ3FC2D102J	C 1000PF, J,200V	1	
C6550	ECA2AHG470	E 47UF, 100V	1	
C6571,72	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6574-78	TCUY1C105ZFN	C 1UF, 16V	5	F1J1C1050006
C6580,81	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6598	ECA2CHG220	E 22UF, 160V	1	
C6601-04	F2A2D1510004	E 150UF, 200V	4	
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6608	EEUFC1E471	E 470UF, 25V	1	
C6611-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6621-28	ECQE2105RKB	P 1UF, 250V	8	
C6621-28	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6633	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
	ECJ4XB1E475M	C 4.7UF, M, 25V	2	F131C1030006
C6634,35				E4 14 C4 0 E 0 0 0 6
C6636	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6637	EEUFC1E121	E 120UF, 25V	1	
C6638	ECWU1224KC9	P 0.22UF, 100V	1	
C6639	F2A2D1510004	E 150UF, 200V	1	E41.0E4040000
C6642	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6644	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6645	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6646	EEUFC1E121	E 120UF, 25V	1	
C6647	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6655,56	EEUFC1A101	E 100UF, 10V	2	
C6660-77	ECJ3XK2J102K	C 1000PF, K,630V	18	
C6695,96	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6701-04	F2A2D1510004	E 150UF, 200V	4	
C6707,08	EEUED2C470	E 47UF, 160V	2	
C6711-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6721-28	ECQE2105RKB	P 1UF, 250V	8	
C6731,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6733	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6734,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6736	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6738	ECWU1224KC9	P 0.22UF, 100V	1	
C6739	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6740	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6741,42	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6744	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6745,46	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6747	F2A2D1510004	E 150UF, 200V	1	
C6748	EEUFC1E221	E 220UF, 25V	1	
C6749	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6750,51	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
007 00,01	1001101002111	1		1 10 10 10 10 10 10 10 10 10 10 10 10 10

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6755	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6756	EEUFC1A101	E 100UF, 10V	1	
C6760,61	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6771-78	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6781	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6786	ECJ3XK2J102K	C 1000PF, K,630V	1	
C7101	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7102	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C7104-06	TCUY1C105ZFN	C 1UF, 16V	3	F1J1C1050006
C7107	F1K2A1040004	C 0.1UF, 100V	1	
C7113	F1K2A1040004	C 0.1UF, 100V	1	
C7115	F1K2A1040004	C 0.1UF, 100V	1	
C7117	F1K2A1040004	C 0.1UF, 100V	1	
C7131	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7132-34	ECJ3XB0J106M	C 10UF, M,6.3V	3	1 1010100000
C7201	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7201	ECJ3XB0J106M	C 10UF, M,6.3V	1	010100000
C7202	TCUY1C105ZFN	C 1UF, 16V	4	F1J1C1050006
C7203-00	F1K2A1040004	C 0.1UF, 100V	1	F131C1030000
C7207		· ·	1	F1J1C1050006
-	TCUY1C105ZFN F1K2A1040004	C 1UF, 16V		F131C1030006
C7211		C 0.1UF, 100V	1	
C7213	F1K2A1040004	C 0.1UF, 100V	1	
C7215	F1K2A1040004	C 0.1UF, 100V	1	
C7217	F1K2A1040004	C 0.1UF, 100V	1	
C8001	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8002	EEVHP1E220	E 22UF, 25V	1	
C8003	ECJ1VB1H471K	C 470PF, K, 50V	1	
C8005	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8008	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8009	TCUY1C475ZFM	C 4.7UF, 16V	1	F1K1C4750018
C8010	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C8011	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8012	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C8013	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C8014,15	ECJ1VB1H103K	C 0.01UF, K, 50V	2	
C8016	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8017	EEVHB1C470	E 47UF, 16V	1	
C8018	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C8019	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C8020	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8021	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9000,01	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9002	EEVHB1C470	E 47UF, 16V	1	
C9003	EEVHB0G221	E 220UF, 4V	1	
C9004	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9005	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9008-10	EEVHP1E220	E 22UF, 25V	3	
C9011	EEVHB1C470	E 47UF, 16V	1	
C9012	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
			1	
C9014	ECJ3VB1C104K	C 0.1PF, K,500V	1	
C9014 C9015	ECJ3VB1C104K ECJ1XF1C104Z	C 0.1PF, K,500V C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9017-19	ECJ1XC1H030C	C 3PF, C, 50V	3	
C9021-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9025,26	ECJ2VB1E473K	C 0.047UF, K, 25V	2	
C9027	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9028	ECJ2VB1E473K	C 0.047UF, K, 25V	1	
C9031	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9032,33	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9034	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9035	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9036	ECJ3VB1C104K	C 0.1PF, K,500V	1	
C9037-39	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9040	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C9041	ECJ1VB1H392K	C 3900PF, K, 50V	1	
C9042	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9045	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9048,49	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9048,49	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9034 C9202	EEVHB0J330	E 33UF, 6.3V	1	
C9202 C9203	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9204-06	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	F I KUJUUJAUUJ
C9204-00 C9208-12	ECJ1XF1C104Z		5	
C9208-12 C9213	TCUY0J685MBM	C 0.1UF, Z, 16V	1	F1K0J685A003
		C 6.8UF, 6.3V	1	FIRUJOOSAUUS
C9215	ECJ3VB1C104K	C 0.1PF, K,500V		
C9216	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	E4KO ICOE A002
C9217	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9218-20	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9225,26	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9229	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9236,37	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9243-46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9255	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	E4 14 04 0 E 0 0 0 0
C9256	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9258-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	E4 14 04 0 F 0 0 0 0
C9261	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9262	ECUX1H822JCM	C 8200PF, K, 50V	1	ECJ3YC1H822J
C9263	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C9264	ECJ2VB1E563K	C 0.056UF, K, 25V	1	
C9265	ECJ3VB1C104K	C 0.1PF, K,500V	1	
C9266	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9267	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9268	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9269	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9300	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9304,05	EEVHB0G221	E 220UF, 4V	2	
C9306-08	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C9310	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9312	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9314	EEVHB0G221	E 220UF, 4V	1	
C9315	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9316	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9317	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9318	ECJ3VB1C104K	C 0.1PF, K,500V	1	
C9319	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9320	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9321	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9353	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9354	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9355	EEVHB1C470	E 47UF, 16V	1	
C9356	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9357	EEVHB1C470	E 47UF, 16V	1	
C9358	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9361-66	ECJ1XC1H101J	C 100PF, J, 50V	6	
C9367	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9368	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9369,70	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9371	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9372	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9373	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9374	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9375	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9377,78	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9379,80	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9381	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9381	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9383	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9385	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9387,88	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9390,91	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9390,91	ECJ3XF1C104Z ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9392	ECJ1XF1C104Z		1	
		C 0.1UF, Z, 16V	1	
C9400	EECS5R5V155	E 1.5UF, 5.5V		
C9401	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9402,03	ECJ1XC1H150J	C 15PF, J, 50V	2	
C9450	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9451	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9452,53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9454	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9455-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9464	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9465	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9466,67	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9468	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9469	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9470	ECJ3VB1C104K	C 0.1PF, K,500V	1	
C9472	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9501,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9503	EEVHB1C470	E 47UF, 16V	1	
C9504	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9505	EEVHB1C470	E 47UF, 16V	1	
C9506	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9507	F2G0J1010021	E 100UF 6.3V	1	
C9509,10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9551	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9552,53	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C9554	F2G0J1010021	E 100UF 6.3V	1	
C9555,56	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C9557,58	F2G1C4700030	E 47UF, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9559	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9560	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C9561,62	F2G1C4700030	E 47UF, 16V	2	
C9563	F2G0J1010021	E 100UF 6.3V	1	
C9564	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9565	EEVHB0G221	E 220UF, 4V	1	
C9566	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9567	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9570	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9572	EEVHB0G221	E 220UF, 4V	1	
C9573	F2G0J1010021	E 100UF 6.3V	1	
C9574	EEVHB1C470	E 47UF, 16V	1	
C9575,76	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9577	F2G0J1010021	E 100UF 6.3V	1	
C9578	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9579	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9601	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9602	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9603-07	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9608	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9610	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	1 110000011000
C9611-16	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9619	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9620-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9625	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9627,28	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9629	ECJ1XC1H331J	C 330PF, J, 50V	1	
C9630	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9631	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9632	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	F131C1030000
	ECJ1XF1C104Z		2	
C9633,34	TCUY1C105ZFN	C 0.1UF, Z, 16V	1	F1J1C1050006
C9635		C 1UF, 16V		F131C1030006
C9701	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9702-05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9706	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9707-10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9713	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9715	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	E41/0 1005 4000
C9716	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9717	ECJ3VB1C104K	C 0.1PF, K,500V	1	
C9718,19	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9720	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9721,22	ECJ1XC1H330J	C 33PF, J, 50V	2	-
C9723	ECJ1XC1H471J	C 470PF, J, 50V	1	
C9724,25	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9726-28	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9730	EEVHB1C470	E 47UF, 16V	1	
C9731	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9732	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9801-03	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9805-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	18	
C9826	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9827	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9828	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9829	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9901,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9903	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9904,05	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9910	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C9911	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9912	EEVHB1C470	E 47UF, 16V	1	
C9913	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9914	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9915	ECJ1VB1C563K	C 0.056UF, K, 16V	1	
C9916	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9918	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9923	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C9925	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	1 11(1022071020
C9926	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
03320	1001030031415141	0 0.001 , 0.34	'	1110000000000
CB1-B7	K1MN80B00004	80P CONNECTOR	7	
ODI-DI	INTINOUDUUUU4	OUF CONNECTOR	+ ′	
D1	K1KA50B00064	50P CONNECTOR	1	
D2,D3	K1KA50B00064 K1KA40B00076	40P CONNECTOR	2	
D4	K1KA12B00066	CONNECTOR	1	
D10	K1KA04A00199	CONNECTOR	1	
D12,13	K1KA50A00125	CONNECTOR	2	
D16	K1KA10A00317	10P CONNECTOR	1	
D17	K1KA08A00293	8P CONNECTOR	1	
D20	K1KA08A00232	8P CONNECTOR	1	
D21	K1KA11A00078	11P CONNECTOR	1	
D22,23	K1KA50A00125	CONNECTOR	2	
D25	K1KA11A00102	11P CONNECTOR	1	
D26	K1KA10A00317	10P CONNECTOR	1	
D27	K1KA09A00077	9P CONNECTOR	1	
D31,32	K1MN80B00002	CONNECTOR	2	
D081	LNJ107W5PRW	LED	1	
D082	MA8056M	ZENER DIODE	1	MAZ80560M
D501	TVSRG2A	DIODE	1	B0EAKR000024
D502	D15XB60	DIODE	1	$ \Delta$
D503	TMPG10G3	DIODE	1	B0BA01000046
D504,05	ERA22-04	DIODE	2	B0HAGP000001
D506	B0BA02700021	DIODE	1	
D508	ERA22-04	DIODE	1	B0HAGP000001
D509	TMPG10G3	DIODE	1	B0BA01000046
D510-12	ERA22-04	DIODE	3	B0HAGP000001
D513	B0BA02700021	DIODE	1	
D514	S1WBA80	DIODE	1	В0ЕВКТ000003 ⚠
D515	D1NL40V70	DIODE	1	
D515	MA4082L	ZENER DIODE	1	B0HALP000002
D516		PHOTO COUPLER	1 2	MAZ40820L
D517-19	PC123FY2	FHUIU GOUPLER	3	B3PAA000012 🗥
D601	MA165	DIODE	1	MA2C165
D602	ERA22-04	DIODE	1	B0HAGP000001
D603	FMLG16S	DIODE	1	B0HARR000008
D604	MA4056H	ZENER DIODE	1	MAZ40560H
D605	ERA22-04	DIODE	1	B0HAGP000001
D606	MA4039H	ZENER DIODE	1	MAZ40390H

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D607-10	ERA22-04	DIODE	4	B0HAGP000001
D611	MA4047H	ZENER DIODE	1	MAZ40470H
D612	MA4056M	ZENER DIODE	1	MAZ40560M
D614,15	ERC91-02	DIODE	2	B0HAPM000003
D617	FML-G12S	DIODE	1	
D618,19	MA165	DIODE	2	MA2C165
D620	AK04	DIODE	1	B0JAMC000003
D621	ERC91-02	DIODE	1	B0HAPM000003
D622	D1NL40V70	DIODE	1	B0HALP000002
D623,24	MA167	DIODE	2	MA2C167
D625	MA700A	DIODE	1	MA2C700A
D626,27	MA167	DIODE	2	MA2C167
D628	EU02	DIODE	1	
D629	ERA22-04	DIODE	1	B0HAGP000001
D630	ERA15-02	DIODE	1	B0EAKM000016
D631	MA4056M	ZENER DIODE	1	MAZ40560M
D632	EU02	DIODE	1	
	MA4051M	ZENER DIODE	1	MAZ40510M
D634 35	+	DIODE	<u> </u>	
D634,35	MA165		2	MA2C165
D900	ERZV10V621P2	VARISTOR	1	
D2301-04	M1FS4	DIODE	4	B0JCME000025
D2305,06	RU4AM	DIODE	2	
D2307	MA111	DIODE	1	MA2J111
D2308	MA152	DIODE	1	
D2316	M1FS4	DIODE	1	B0JCME000025
D3001	MA111	DIODE	1	MA2J111
D3002	M1FS4	DIODE	1	
D3351,52	MA153	DIODE	2	MA3X153
D3501-04	MA3056M	ZENER DIODE	4	MAZ30560M
D3505,06	MA153	DIODE	2	MA3X153
D3507	MA111	DIODE	1	MA2J111
D6401-03	MA8056H	ZENER DIODE	3	MAZ80560H
D6405	D1FL40F4063	DIODE	1	B0ECHP000001
D6406,07	MA8056H	ZENER DIODE	2	MAZ80560H
D6409-12	D1FL40F4063	DIODE	4	B0ECHP000001
D6452,53	MA111	DIODE	2	MA2J111
D6454	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6455	MA111	DIODE	1	MA2J111
D6456	D1FL40F4063	DIODE	1	B0ECHP000001
D6457	M1FL20UF4063	DIODE	1	B0HCMM000009
D6458	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6459	MA111	DIODE	1	MA2J111
D6460,61	B0HCKS000001	DIODE	2	
D6465,66	MA8330M	ZENER DIODE	2	MAZ83300M
D6467	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6468	MA111	DIODE	1	MA2J111
D6469	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6470	MA111	DIODE	1	MA2J111
D6472,73	MA111	DIODE	2	MA2J111
D6474	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6475	MA111	DIODE	1	MA2J111
D6476	D1FL40F4063	DIODE	1	B0ECHP000001
		+		-
D6477	MA8051L	ZENER DIODE	1	MAZ80510LL

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6479	MA111	DIODE	1	MA2J111
D6480	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6481,82	MA8330M	ZENER DIODE	2	MAZ83300M
D6491,92	D1FL40F4063	DIODE	2	B0ECHP000001
D6495	B0HCKS000001	DIODE	1	
D6501-08	K7GBZEE00002	PHOTO COUPLER	8	
D6509	MA111	DIODE	1	MA2J111
D6511	M1FL20UF4063	DIODE	1	B0HCMM000009
D6512-14	MA111	DIODE	3	MA2J111
D6521	D1FL40F4063	DIODE	1	B0ECHP000001
D6522	MA111	DIODE	1	MA2J111
D6523	D1FL40F4063	DIODE	1	B0ECHP000001
D6524	MA8051L	ZENER DIODE	1	MAZ80510LL
D6525	MA111	DIODE	1	MA2J111
D6526	M1FL20UF4063	DIODE	1	B0HCMM000009
D6527	MA111	DIODE	1	MA2J111
D6531	MA8051L	ZENER DIODE	1	MAZ80510LL
D6531	B0HCKS000001	DIODE	1	MAZOUS IULL
D6542	MA111	DIODE	1	MA2J111
D6542	MA8051L	ZENER DIODE	1	MAZ80510LL
D6544	MA111	DIODE	1	MA2J111
	MA8051L	ZENER DIODE	1	MAZ80510LL
D6545			-	
D6546-48	MA8330M	ZENER DIODE	3	MAZ83300M
D6549,50	MA111	DIODE	2	MA2J111
D6551,52	MA8051L	ZENER DIODE	2	MAZ80510LL
D6553	MA111	DIODE	1	MA2J111
D6570	M1FL20UF4063	DIODE	1	B0HCMM000009
D6572	D1FL40F4063	DIODE	1	B0ECHP000001
D6582	MA8051L	ZENER DIODE	1	MAZ80510LL
D6583	LNJ201LPQJA	LED	1	
D6584	MA111	DIODE	1	MA2J111
D6585,86	MA8330M	ZENER DIODE	2	MAZ83300M
D6611	M1FS4	DIODE	1	B0JCME000025
D6615	D1FL40F4063	DIODE	1	B0ECHP000001
D6620-22	SF20LC30F10	DIODE	3	
D6624	SF20LC30F10	DIODE	1	
D6629	B0HBSM000031	DIODE	1	
D6635	MA8051L	ZENER DIODE	1	MAZ80510LL
D6636	MA111	DIODE	1	MA2J111
D6637	D1FL40F4063	DIODE	1	B0ECHP000001
D6640	D1FL40F4063	DIODE	1	B0ECHP000001
D6641,42	M1FS4	DIODE	2	B0JCME000025
D6645-47	D1FL40F4063	DIODE	3	B0ECHP000001
D6711	M1FS4	DIODE	1	B0JCME000025
D6715	D1FL40F4063	DIODE	1	B0ECHP000001
D6720-22	SF20LC30F10	DIODE	3	
D6724	SF20LC30F10	DIODE	1	
D6729	B0HBSM000031	DIODE	1	
D6735	MA8051L	ZENER DIODE	1	MAZ80510LL
D6736	MA111	DIODE	1	MA2J111
D6737	D1FL40F4063	DIODE	1	B0ECHP000001
D6740,41	D1FL40F4063	DIODE	2	B0ECHP000001
D6750,51	D1FL40F4063	DIODE	2	B0ECHP000001
D6752,53	M1FS4	DIODE	2	B0JCME000025
,	<u>I</u>	I.		1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6754	D1FL40F4063	DIODE	1	B0ECHP000001
D6755	M1FS4	DIODE	1	B0JCME000025
D6757	D1FL40F4063	DIODE	1	B0ECHP000001
D6760	MA111	DIODE	1	MA2J111
D6761	MA8051L	ZENER DIODE	1	MAZ80510LL
D6763	MA8051L	ZENER DIODE	1	MAZ80510LL
D6764	MA111	DIODE	1	MA2J111
D6765	LNJ201LPQJA	LED	1	
D6766,67	MA8330M	ZENER DIODE	2	MAZ83300M
D6768	MA111	DIODE	1	MA2J111
D6769	LNJ201LPQJA	LED	1	
D6770	MA111	DIODE	1	MA2J111
D8001,02	MA111	DIODE	2	MA2J111
D9000	MA3036H	ZENER DIODE	1	MAZ30360H
D9001-09	MA3062M	ZENER DIODE	9	MAZ30620M
D9351	MA152K	DIODE	1	MA3X152K
D9352,53	MA3062M	ZENER DIODE	2	MAZ30620M
D9352,55	MA111	DIODE	1	MA2J111
D9550	B0JCPD000010	DIODE	1	WAZVIII
D9550 D9551	MA113	DIODE	1	MA2J113
D9551	M1FS4	DIODE	1	WIAZJIIJ
D9552 D9553	MA152K	DIODE	1	MA3X152K
D9553	MA111	DIODE	1	MA2J111
D9902	MA152K		1	MA3X152K
D9902	WA152K	DIODE	1	WIASKISZK
E000 1	EVE 52DC	EUSE HOLDED	1	
F900-1	EYF-52BC	FUSE HOLDER	<u> </u>	K4K403400483
F1	TJS3A9630	CONNECTOR	1	K1KA03A00183
F900-2	EYF-52BC	FUSE HOLDER	1	1/41/400400400
F9	TJS3A9630	CONNECTOR	1	K1KA03A00183
F901-1,-2	EYF-52BC	FUSE HOLDER	2	
H1	K1KB50B00030	50P CONNECTOR	1	
H2	K1KB40B00015	40P CONNECTOR	1	
H37	TJS3A9640	3P CONNECTOR	1	K1KA03A00171
1101	1000/10040	or contractor	<u> </u>	141101007100717
HX1	K1KB40B00015	40P CONNECTOR	1	
1171	TTTTD-000010	401 CONTRECTOR	<u> </u>	
IC081	B3L00000020	IC	1	
IC501	STRF6629B	IC	1	C0DAAMH00002
IC502	STRF6656LF53	LINEAR IC	1	C5HABZZ00014
IC502	MIP0210SY1TV	IC (LOGIC)	1	CSHABZZ00014
	AN7718F	<u> </u>	1	
IC504 IC601	AN6912	LINEAR IC	1	
IC602	AN1431T	LINEAR IC	1	
IC603	C0DAAHG00007	LINEARIC	1	CODAETHOOGG
IC604	PQ30RV21A	LINEAR IC	1	C0DAEZH00008
IC605,06	AN1431T	LINEAR IC	2	
IC607	AN7705F	LINEAR IC	1	04 4 40000050
IC2301,02	TDA7480	LINEAR IC	2	C1AA00000561
IC2304	PQ09SZ1T	IC	1	C0CBAHG00005
IC3502	TVRJ598-1	ROM IC	1	
IC3699	TVRJ642-2	ROM IC	1	(HZ)
IC3699	TVRJ784-2	ROM IC	1	(HY)
IC3801	MM1065ZMR	LINEAR IC	1	C0CBABB00029

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC3802	C0EBE0000066	IC	1	
IC3803	TVSA0500	IC	1	C3ABMG000074
IC3804	C1AB00001494	IC	1	
IC3805,06	MM1065ZMR	LINEAR IC	2	C0CBABB00029
IC3809	TC74LCX244F	MOS IC (CMOS S/LOGIC)	1	C0JBAZ001234
IC6471	AN1431M	LINEAR IC	1	
IC6605,06	TC74HC244AF	IC	2	
IC6701-03	C0ZBZ0000138	IC	3	
IC6704	C0ZBZ0000561	IC	1	
IC6705	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6706	TC74HC244AF	IC	1	
IC6711	AN1431M	LINEAR IC	1	
IC7101	C0JBAZ000005	IC	1	
IC7201	C0JBAZ000005	IC	1	
IC8001	M52346SP	LINEAR IC	1	C1AA00000395
IC8002	TC74HC14AF	IC	1	C0JBAB000155
IC9000	PQ09SZ1T	IC	1	C0CBAHG00005
IC9001	C0CBCBD00005	IC	1	
IC9002-04	C0ABHA000033	IC	3	
IC9006	C0CBCBD00005	IC	1	
IC9007	C0FBAD000069	IC	1	
IC9200	MN84504	MOSIC	1	
IC9203	C0CBCBD00005	IC	1	
IC9206	C0JBAZ000855	IC	1	
IC9210	C3ABPJ000017	IC	1	
IC9212	TLC2933IPWL	INTEGRATED CIRCUIT	1	C0ABFA000012
IC9213	COCBCBD00005	IC	1	00ABI A000012
IC9300	C0ZBZ0000551	IC	1	
IC9300	C0CBCBD00005	IC	1	
IC9351	MN102L230	IC	1	
IC9351	HM538123BJ8Z	IC	1	C3HAHC000006
IC9353	TVRJ799-1	ROM IC	1	CSHAHCUUUUU
		ROM IC		
IC9355 IC9356	TVRJ858	IC	1	
	C0JBAZ001201 C1DB00000274	IC	1	
IC9357		IC SOCKET	1	
IC9450S	TJSB01108	ROM IC	-	
IC9450	TVRJ709		1	
IC9451	C1ZBZ0001996	MOS IC (CMOS S/I OGIC)	1	CO IBABOOA 50
IC9452	TC74HCU04AF	MOS IC (CMOS S/LOGIC)	1	C0JBAB000159
IC9453	C0CBCAD00066		1	
IC9455	CODBAZHOOOS	IC .	1	
IC9550	CODBAMHOOOS	IC IC	1	
IC9551	CODBEZGO0004	IC	1	
IC9552	C0 IBAZ001604		1	
IC9553	C0JBAZ001604	MOS IC (MICON I SI)	1	C0 IBA7004265
IC9554	JLC1562BF	MOS IC (MICON LSI)	1	C0JBAZ001265
IC9601	MN84505	MOS IC	1	
IC9602	C3ABPJ000043	IC ROM IC	1	
IC9603	TVRJ741-1	ROM IC	1	
	C0ZBZ0000423	IC	1	
IC9604		IC	1	I
IC9612	C0JBAZ000855			
	TJSB01108 TVRJ742-1	IC SOCKET ROM IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9702	PST9128NR	IC	1	C0EBE0000066
IC9703	C0CBCAD00007	IC	1	
IC9704	C0ZBZ0000423	IC	1	
IC9710-12	C0JBAZ001604	IC	3	
IC9801	C0JBAZ001604	IC	1	
IC9802,03	C0JBAZ000005	IC	2	
IC9805-22	TC74LCX574F	MOS IC (CMOS S/LOGIC)	18	C0JBAF000218
IC9900	C2BBFE000121	IC (CIIICO CIIICO)	1	
IC9902	M51957BFP	LINEAR IC	1	C0EBB0000024
JK3300	K2HA204B0097	JACK	1	(HY)
JK3301	K1CB106B0027	CONNECTOR	1	
JK3302	K10BB2AB0005	CONNECTOR	1	(HY)
JK3303	K2HA204B0097	JACK	1	(HY)
JK3304	K10BB5AB0003	CONNECTOR	1	(HY)
JK3305	K2HA306B0048	JACK	1	(HZ)
JK3306	K2HA306B0049	JACK	1	(HZ)
JK3307	K2HA204B0097	JACK	1	(HZ)
JK3308	K2HA204B0096	JACK	1	(HZ)
JK3509	K1FB109B0058	CONNECTOR	1	()
JK3511	TJS8A9880	CONNECTOR	1	K1FB115B0034
JK3513	K2HC103B0105	JACK	1	
JK8500	K4BC02B00013	TERMINAL	1	
	144200220010			
JS24	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS28-32	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS35	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2301	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
JS8019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
		,		
L501	ELF11M010E	LINE FILTER	1	Δ
L502	ETQR45T020A	CHOKE TRANS	1	Δ
L503	ELEXT100KA	PEAKING COIL	1	
L601,02	TALL08N470KA	INDUCTION COIL	2	G0A470GA0011
L603	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008
L604	EXCELSA39	BEAD CHOKE	1	
L605-07	EXCELDR35C	BEAD CHOKE	3	
L608	EXCELSA39	BEAD CHOKE	1	
L609-11	EXCELDR35C	BEAD CHOKE	3	
L612	TALFP15B221K	INDUCTION COIL	1	
L613-16	EXCELDR35C	BEAD CHOKE	4	
L902,03	G0B123K00001	CHOKE COIL	2	Δ
L2301,02	G0ZZ00002023	COIL	2	
L2303,04	EXCELDR35C	BEAD CHOKE	2	
L2306	ELJPA100KB	CHIP INDUCTOR	1	
L3001-03	ELJPA100KB	CHIP INDUCTOR	3	
L3007,08	ELJPA100KB	CHIP INDUCTOR	2	
L3301	TLK20LFA223M	EMI FILTER	1	J0HABB000003
L3302,03	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3304,05	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3306,07	ELJPA100KB	CHIP INDUCTOR	2	
L3351,52	TLK20LFA223M	EMI FILTER	2	J0HABB000003

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L3356,57	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3358,59	ELJPA100KB	CHIP INDUCTOR	2	
L3501	ELJPA100KB	CHIP INDUCTOR	1	
L3507-09	TLK20LFA224M	EMI FILTER	3	J0HABB000004
	-		4	
L3510-13	TLK212T256AL	EMI FILTER	-	J0HAAB000012
L3525,26	ELJPA100KB	CHIP INDUCTOR	2	
L3530	ELJPA100KB	CHIP INDUCTOR	1	
L3555	ELJPA100KB	CHIP INDUCTOR	1	
L3801,02	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3803	G1C100KA0008	INDUCTOR COIL	1	
L3804	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
L3806	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L3807	TALC168T2R2K	CHIP INDUCTOR COIL	1	G1C2R2K00006
L3808	G1C100KA0008	INDUCTOR COIL	1	
L3809	TALC325T4R7M	CHIP INDUCTOR COIL	1	
L3810,11	G1C100KA0008	INDUCTOR COIL	2	
L3813	TALC168T4R7K	CHIP INDUCTOR COIL	1	G1C4R7K00013
L3814-16	G1C100KA0008	INDUCTOR COIL	3	
L3817-19	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3820.21	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3822-25	ELKE103FA	NOISE FILTER	4	
L3826,27	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3828,29	TLK20LFA223M	EMI FILTER	2	J0HABB000003
•			1	JUNABBUUUUS
L3830	ELJPA100KB	CHIP INDUCTOR		
L4551	ELJPA100KB	CHIP INDUCTOR	1	
L6451,52	J0JJC0000021	CHIP INDUCTOR	2	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	TSKA158	BEAD CORE	1	G0ZZ00001935
L6602	TSKA158	BEAD CORE	1	G0ZZ00001935
L6604,05	TSKA158	BEAD CORE	2	G0ZZ00001935
L6611,12	ELC16BR82L	CHOKE COIL	2	
L6615,16	ELC16BR82L	CHOKE COIL	2	
L6618	J0JJC0000021	CHIP INDUCTOR	1	
L6620-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6626,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6636,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6644,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6647,48	J0JJC0000021	CHIP INDUCTOR	2	
L6702-04	TSKA158	BEAD CORE	3	G0ZZ00001935
L6705	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008
L6711	ELC16BR82L	CHOKE COIL	1	
L6713,14	ELC16BR82L	CHOKE COIL	2	
L6716	ELC16BR82L	CHOKE COIL	1	
L6718	J0JJC0000021	CHIP INDUCTOR	1	
L6720-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6726,27		BEAD CORE	2	
	TSKA158			G0ZZ00001935
L6736,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6744,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6747	J0JJC0000021	CHIP INDUCTOR	1	
L6750	TSKA158	BEAD CORE	1	G0ZZ00001935
L7101-03	J0JJC0000021	CHIP INDUCTOR	3	
L7105	J0JJC0000021	CHIP INDUCTOR	1	
L7201-05	J0JJC0000021	CHIP INDUCTOR	5	I
L7201-03	00000000021	OTHE HADOUTOR		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L8501,02	TLPD061	LINE FILTER	2	G0A2R5H00003
L9001-04	ELKE103FA	NOISE FILTER	4	
L9005-10	EXCCL3225U1	EMI FILTER	6	
L9200,01	EXCCL3225U1	EMI FILTER	2	
L9300	EXCCL3225U1	EMI FILTER	1	
L9350	ELJPA100KB	CHIP INDUCTOR	1	
L9450	EXCCL3225U1	EMI FILTER	1	
L9451	ELJPA150KF	CHIP INDUCTOR	1	
L9551	G1C220M00029	INDUCTOR COIL	1	
L9552	G1C470M00012	INDUCTOR COIL	1	
L9553	EXCCL3225U1	EMI FILTER	1	
L9601	ELJFA1R0KF	CHIP COIL	1	
L9701	EXCCL3225U1	EMI FILTER	1	
L9801	EXCCL3225U1	EMI FILTER	1	
L9803	EXCCL3225U1	EMI FILTER	1	
L9805-08	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
23003 00	ENGOGETONO	in o orim, i/ron	+-	
LC9000-02	J0E3505B0002	LCR FILTER	3	
LC9000-02 LC9003	ELKE103FA	NOISE FILTER	1	
LC9003	ELKE103FA	NOISE FILTER	1	
LC9300-02	ELKE103FA	NOISE FILTER	3	
LC9500-02 LC9501-05	ELKE103FA	NOISE FILTER	5	
LC9507-03	ELKE103FA	NOISE FILTER	2	
LC9307,08 LC9801-03	ELKE103FA	NOISE FILTER	3	
LC9901-03	ELKE103FA	NOISE FILTER	1	
LC9901	ELKETUSFA	NOISE FILTER	1	
P1	TJS3A9680	7P CONNECTOR	1	K4K40740000E
P2	TJS3A9680	6P CONNECTOR	1	K1KA07A00095 K1KA06A00179
P6	K1KA07A00056	7P CONNECTOR	1	KTKAU0AUU179
P9	TJS3A9630		1	K1KA03A00183
P10		5P CONNECTOR	1	K1KA05A00183
P12	TJS1A8810 K1KA05A00139	5P CONNECTOR	<u> </u>	KIKAUSAUUITT
P12	TJS1A8790	+	1	K4K403400343
P25	TJS1A8790	3P CONNECTOR 11P CONNECTOR	1	K1KA03A00213
P27	TJS1A8850	9P CONNECTOR	1	K1KA11A00073 K1KA09A00099
P21	1351A0050	9P CONNECTOR	<u>'</u>	KTKAU9AUUU99
0000	26D604 A	TRANSISTOR	4	26D0604 A
Q082	2SD601A	TRANSISTOR	1	2SD0601A
Q601	2SA1309A	TRANSISTOR	1	2SA13090WA
Q602	B1DEGQ000019	500V 20A	1	28C2244 AW
Q603	2SC3311A	TRANSISTOR	1	2SC3311AW 2SB0621AW
Q604	2SB621A	TRANSISTOR	1	
Q605-08	2SC3311A	TRANSISTOR	4	2SC3311AW
Q2301-03	2SD601A	TRANSISTOR	3	2SD0601A
Q2305,06	2SD601A	TRANSISTOR	2	2SD0601A
Q2406	2SD601A	TRANSISTOR	1	2SD0601A
Q2408	2SD601A	TRANSISTOR	1	2SD0601A
Q2410	2SD601A	TRANSISTOR	1	2SD0601A
Q3013,14	2SD601A	TRANSISTOR	2	2SD0601A
Q3085,86	2SB709A	TRANSISTOR	2	2SB0709A
Q3301-09	2SD601A	TRANSISTOR	9	2SD0601A
Q3351,52	2SD601A	TRANSISTOR	2	2SD0601A
Q3353	2SB709A	TRANSISTOR	1 -	2SB0709A
Q3354-58	2SD601A	TRANSISTOR	5	2SD0601A
Q3359	2SB709A	TRANSISTOR	1	2SB0709A

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q3501-03	2SD601A	TRANSISTOR	3	2SD0601A
Q3507	2SB709A	TRANSISTOR	1	2SB0709A (HX) (HZ)
Q3507	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3508	2SB709A	TRANSISTOR	1	2SB0709A (HX) (HZ)
Q3508	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3509	2SB709A	TRANSISTOR	1	2SB0709A (HY) (HZ)
Q3509	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3513	2SD601A	TRANSISTOR	1	2SD0601A
Q3514	2SB709A	TRANSISTOR	1	2SB0709A
Q3515	2SD601A	TRANSISTOR	1	2SD0601A
Q3516	2SB709A	TRANSISTOR	1	2SB0709A
Q3531,32	2SD601A	TRANSISTOR	2	2SD0601A
Q3801,02	2SB709A	TRANSISTOR	2	2SB0709A
Q3803,04	2SD601A	TRANSISTOR	2	2SD0601A
Q3805-07	2SB709A	TRANSISTOR	3	2SB0709A
Q3808	2SD601A	TRANSISTOR	1	2SD0601A
Q3809	2SK198R	FET	1	2SK01980R
Q3810	2SD601A	TRANSISTOR	1	2SD0601A
Q3812,13	2SB709A	TRANSISTOR	2	2SB0709A
Q3812,13 Q3815	2SB709A	TRANSISTOR	1	2SB0709A
Q3817	2SB709A	TRANSISTOR	1	2SB0709A
Q6401	2SK620	FET	1	2SK0620
	B1BBCJ000003	TRANSISTOR	1	2380020
Q6451				20D0700A
Q6452	2SB709A	TRANSISTOR	1	2SB0709A
Q6453	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6454	2SD814A	TRANSISTOR	1	
Q6471	B1BBCJ000003	TRANSISTOR	1	00007004
Q6472	2SB709A	TRANSISTOR	1	2SB0709A
Q6474	2SD814A	TRANSISTOR	1	0000044
Q6476,77	2SD601A	TRANSISTOR	2	2SD0601A
Q6491,92	2SC1473A	TRANSISTOR	2	2SC1473AE
Q6511,12	B1DFGL000005	TRANSISTOR	2	0000044
Q6520	2SD601A	TRANSISTOR	1	2SD0601A
Q6521	FS7VS14AT11	FET	1	
Q6522-27	2SK2993	FET	6	
Q6530	2SB1073001TV	TRANSISTOR	1	
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542-47	B1DFHM000002	DIODE	6	
Q6550	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6551	2SD601A	TRANSISTOR	1	2SD0601A
Q6552	FS7VS14AT11	FET	1	
Q6553	2SB1073001TV	TRANSISTOR	1	
Q6555	FS7VS14AT11	FET	1	
Q6581	2SD601A	TRANSISTOR	1	2SD0601A
Q6601	2SK3652000VH	TRANSISTOR	1	
Q6605	2SK3652000VH	TRANSISTOR	1	
Q6621	2SK3637000VE	TRANSISTOR	1	
Q6624	2SK3637000VE	TRANSISTOR	1	
Q6641,42	B1DFHM000002	DIODE	2	
Q6671	2SB940A	TRANSISTOR	1	2SB0940AJ
Q6672	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6673	2SD1263A	TRANSISTOR	1	
Q6701	2SK3652000VH	TRANSISTOR	1	
Q6705	2SK3652000VH	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6721	2SK3637000VE	TRANSISTOR	1	
Q6724	2SK3637000VE	TRANSISTOR	1	
Q6741,42	B1DFHM000002	DIODE	2	
Q6745,46	2SK326800L	FET	2	
Q6751	2SD1264	TRANSISTOR	1	2SD12640J
Q6752,53	2SC1473	TRANSISTOR	2	2SC14730E
Q6755,56	2SD601A	TRANSISTOR	2	2SD0601A
Q7201,02	2SB709A	TRANSISTOR	2	2SB0709A
Q8021	2SD601A	TRANSISTOR	1	2SD0601A
Q9350	2SK620	FET	1	2SK0620
Q9500,02	2SD601A	TRANSISTOR	2	2SD0601A
Q9501	2SK620	FET	1	2SK0620
Q9502	2SD601A	TRANSISTOR	1	2SD0601A (D2)
Q9502	2SK620	FET	1	2SK0620 (D1)
Q9504	2SK620	FET	1	2SK0620
Q9701-03	2SD601A	TRANSISTOR	3	2SD0601A
Q9904	2SD601A	TRANSISTOR	1	2SD0601A
R081	TAJAAH0470JV	M 47 OHM,J,1/16W	1	D0GB470JA006
R082	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
R083	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R084	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R088	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R091,92	TAJAAH0470JV	M 47 OHM,J,1/16W	2	D0GB470JA006
R093,94	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R501,02	TARAFR06R8JC	F 6.8 OHM, J, 7W	2	Δ
R503	ERG2FJS223D	M 22KOHM, J, 2W	1	
R504	ER0S2CKF2203	M 220KOHM, F,1/4W	1	
R505	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R506	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R507	ERDS2TJ561	C 560 OHM, J,1/4W	1	
R508	ER0S2CKF2203	M 220KOHM, F,1/4W	1	
R509	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R510,11	ERDS2TJ332	C 3.3KOHM, J,1/4W	2	
R512,13	ERDS1FJ681	C 680 OHM, J,1/2W	2	
R514	ERDS2TJ182	C 1.8KOHM, J,1/4W	1	
R515	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R516	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R517	ERDS2TJ152	C 1.5KOHM, J,1/4W	1	
R518	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R519	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R520	ERDS2TJ152	C 1.5KOHM, J,1/4W	1	
R521	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R522	ERDS2TJ182	C 1.8KOHM, J,1/4W	1	
R523	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R524	ERG3FJS473D	M 47KOHM, J, 3W	1	
R525	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R526	ERG3FJS473D	M 47KOHM, J, 3W	1	
R527	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R529	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R531	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R534	ERG2FJS223D	M 22KOHM, J, 2W	1	
R536	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R601	ER0S2CKF1213	M 121KOHM, F,1/4W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R602	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R603	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R604	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R605	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R606	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R607,08	ERDS2TJ222	C 2.2KOHM, J,1/4W	2	
R609,10	ER0S2CKF1803	M 180KOHM, F,1/4W	2	
R612	ERDS2TJ273	C 27KOHM, J,1/4W	1	
R613	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R614	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R615	ER0S2CKF4642	M46.4KOHM, F,1/4W	1	
R616	ER0S2CKF4992	M49.9KOHM, F,1/4W	1	EROS2CKF4992
R617	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R618	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R619	ER0S2CKF4992	M49.9KOHM, F,1/4W	1	EROS2CKF4992
R620	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R621	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
R622	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R623	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R624	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R625,26	ERG2FJS471D	M 470 OHM, J, 2W	2	EROSZORI ZOUT
R627	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R628	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R629	ERDS1FJ471	C 470 OHM, J,1/2W	1	
R630	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R631	ERDS1FJ220	C 22 OHM, J,1/2W	1	
R632,33	ERDS1TJ220	C 6.8KOHM, J,1/4W	2	
R634	ERDS2TJ332		1	
R635	ERDS2TJ472	C 3.3KOHM, J,1/4W C 4.7KOHM, J,1/4W	1	
R636	ERDS2TJ472		1	
		C 150 OHM, J,1/4W		
R637	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R638	ER0S2CKF1002	M 10KOHM, F,1/4W	1	EDOCOCKE4504
R639	ER0S2CKF1501	M1.50KOHM, F,1/4W	1	EROS2CKF1501
R640	ER0S2CKF3741	M3.74KOHM, F,1/4W	1	
R641	ER0S2CKF3830	M 383 OHM, F,1/4W	1	ED OOOUTOE!
R642	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R643	ER0S2CKF6192	M61.9KOHM, F,1/4W	1	
R644	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R645	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R646	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R647	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R648	ERDS2TJ473	C 47KOHM, J,1/4W	1	EDOS20VE2554
R649	EROS2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R650	ERDS2TJ470	C 47 OHM, J,1/4W	1	
R651	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R652	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R653	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R654	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R656	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R657	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R658	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R659	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R660	ERDS1TJ221	C 220 OHM, J,1/2W	1	
R661	ERDS1TJ391	C 390 OHM, J,1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R662	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	Remarks
R663	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R664	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R665	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R666,67	ERDS1FJ224	C 220KOHM, J,1/2W	2	
R668	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R900,01	ERC12ZGK105	S 1MOHM, K,1/2W	2	Δ
,				127
R1554,55	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2301	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2304	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2305,06	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R2309	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2310	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2319,20	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2321	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2322,23	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2324,25	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2326	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2327	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R2328	ERJ6GEYJ683	M 68KOHM,J,1/10W	1	
R2329,30	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	2	
R2331	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2332	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2333	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2334	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2335,36	ERJ6GEYJ123	M 12KOHM,J,1/10W	2	
R2337,38	ERJ6GEY0R00	M 0 OHM,J,1/10W	2	
R2341	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2343	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2346	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2347	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2348	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2349,50	ERJ6GEY0R00	M 0 OHM,J,1/10W	2	
R2408	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2410	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2431	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2434	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2438	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2439	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2440	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2441	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2445	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2448	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2450	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2452	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2453	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2456	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2457	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R2460	ERJ6ENF1802	M 18KOHM, 1/10W	1	
R2461,62	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R2463	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R2464	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2466	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2467	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2469	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2470	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2471	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2472	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2473	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2476,77	ERJ6GEYJ220	M 22 OHM,J,1/10W	2	
R2480	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2481,82	ERJ6GEYJ153	M 15KOHM,J,1/10W	2	
R2483	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2484	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3001-04	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R3007	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R3009-15	ERJ3GEYJ560	M 56 OHM,J,1/16W	7	
R3016-21	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3022,23	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3024-29	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3030,31	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3032,33	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R3034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3036	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3037	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3038	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3039-43	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R3045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3046	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3047	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3078	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3079	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3087,88	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3101-08	ERJ3GEYJ334	M 330KOHM,J,1/16W	8	D0GB334JA002
R3101-00 R3109	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3301	ERJ6ENF75R0	M 75 OHM, 1/10W	1	+
R3302	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(HY)
R3303	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	()
R3304,05	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3304,05 R3306	ERJ6GEYJ184	M 180KOHM, J,1/10W	1	
R3307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3308	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GR101 IA006
R3309	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	D0GB101JA006
R3310			_	-
R3311	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3312	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	-
R3313	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	-
R3314	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	1
R3315	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	DOOD404 LACCC
R3316-18	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3319-21	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	Dooptotties
R3322	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3323	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3324	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3325-27	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3332,33	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3334	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3335	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3336	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3337	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3338,39	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R3340	ERJ6ENF9310	M 931 OHM, 1/10W	1	
R3341	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3342	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3343	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3344	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3345	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3346-48	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3349,50	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3351,52	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3353-55	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3356,57	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3358-61	TAJAAH0101JV	M 100 OHM,J,1/16W	4	D0GB101JA006
R3362,63	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3364	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3365	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	DOODTOTOAGGO
R3366,67	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3368	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3369-72	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	DOGDTOTOAGGO
R3373,74	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3375-77	TAJAAH0101JV		3	D0GB101JA006
	ERJ3GEYJ3R3	M 100 OHM,J,1/16W	2	DUGBTUTJAUU
R3378,79		M 3.3 OHM,J,1/16W		
R3380-82	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	DOCEMAN IANGE
R3383-85	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3386,87	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	DOOD404 IA000
R3388	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3389,90	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3391	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3392	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3393,94	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	
R3395	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3396	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3400	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3501-03	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3504	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R3505	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3506	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3507	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3508	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	(HY) (HZ)
R3508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3509	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	(HY) (HZ)
R3509	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3510,02	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3511	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3513,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3516,17	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3518-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R3526-28	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3529,30	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3532-34	ERJ6GEY0R00	M 0 OHM,J,1/10W	3	
R3535,36	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
R3537	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	(HX)
R3537	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	(HY) (HZ)
R3538	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(HY) (HZ)
R3538	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	(HX)
R3539,40	ERJ6ENF75R0	M 75 OHM, 1/10W	2	(HY)
R3540	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	(HX)
R3541	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	,
R3547	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3548	ERJ6ENF7500	M 750 OHM, 1/10W	1	(HY) (HZ)
R3548	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	(HX)
R3549,50	ERJ6ENF1001	M 1KOHM, 1/10W	2	,
R3577	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3578	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3579	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3580	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3581	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3582	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3585,86	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3589	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3590	ERJ6GEYJ560	.,	1	
		M 56 OHM,J,1/10W M 1KOHM,J,1/10W		
R3595-97	ERJ6GEYJ102	· · ·	3	
R3599	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3603,04	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3611-14	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	4	
R3626-29	ERJ6GEYJ3R3	M 3.3KOHM,J,1/10W	4	
R3653	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3654	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3655	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3656	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3663,64	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3668	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3755,56	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3764-66	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R3776,77	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3778	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3801,02	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3803,04	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R3805	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3806	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3808	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3809	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3810	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3811	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3812	ERJ6ENF3300	M 330 OHM, 1/10W	1	
R3813	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
R3814	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R3815	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3816	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3817	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3818	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3819	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3820	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R3821	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R3822	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3823	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3824	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3825	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3826	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3827	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3828	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3829	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3830,31	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3832	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3833	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3834	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3835	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3836	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3837-40	EXB38V471J	RESISTOR ARRAY	4	
		M 470 OHM,J,1/16W	1	
R3841	ERJ3GEYJ471	, ,		
R3842	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3843	ERJ3GEYJ471	M 470 OHM, J,1/16W	1	DOOD404 14000
R3845	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	D0GB101JA006
R3846	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3848	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3849	ERJ6ENF3000	M 300 OHM, 1/10W	1	
R3850	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3851	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3852	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R3853	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3854	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3855	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3856	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3857	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3858	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3859	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R3860	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	D0GB391JA002
R3861	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R3862	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3863,64	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R3865	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3866	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R3867-69	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3870	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R3871	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3872	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R3873	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3874	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3875,76	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	2	
R3877	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3879	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3881	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3884-86	TAJAAH0820JV	M 82 OHM,J,1/16W	3	D0GB820JA006
R3887	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3888	ERJ3GEY0R00	M 0 OHM, 1/16W	1	_ 302.0.07
		0 011111, 177011	<u>'</u>	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3891	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	Homano
R3892	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3893	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3894	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3895	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4521	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4551	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4552	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4601	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4604	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R6401-08	ERJ6GEYJ221	M 220 OHM,J,1/10W	8	
R6409	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6410,11	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6412	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
			1	
R6413	ERJ6GEYJ224	M 220KOHM,J,1/10W M 10KOHM,J,1/10W	4	
R6420-23 R6424	ERJ6GEYJ103 ERJ6GEYJ224	, ,		
		M 220KOHM,J,1/10W	1	
R6425-28	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6429	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6441	ERJ6ENF7502	M 75KOHM, 1/10W	1	
R6442	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6443	EVMEASA00B24	CONTROL 20KOHMB 0.3W	1	
R6444	ERJ6GEYJ272	M 2.7KOHM,J,1/10W	1	
R6445	ERJ6ENF2551	M2.55KOHM, 1/10W	1	
R6447	ERG2FJS223D	M 22KOHM, J, 2W	1	
R6448	ERG2FJS472D	M 82KOHM, J, 3W	1	
R6453	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6454	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6455	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6456	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R6457,58	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6459-61	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R6462	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R6463	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6464	ERG2FJS273D	M 27KOHM, J, 2W	1	
R6465	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6466	ERJ14YJ101	M 100 OHM, J,1/4W	1	
R6467,68	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6469	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6470	ERJ6GEYJ273	M 27KOHM,J,1/10W	1	
R6471	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6473	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6474	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6475	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6476	ERJ6GEYJ394	M 390KOHM,J,1/10W	1	
R6477	EVMEASA00B33	OR EVM38GA00B33	1	
R6478	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6479,80	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6482	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6483	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6484	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6485,86	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6488	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6489	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6491	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6492,93	ERJ6ENF2203	M 220KOHM, 1/10W	2	
R6494	ERJ12YJ102	M 1KOHM,J, 1/2W	1	
R6497	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6498,99	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6500-02	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6503,04	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6505-07	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6509	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6510	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6511	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6512	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6513	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6514	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6515	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6516	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6518	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6521	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6522	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R6524	ERJ6GEYF222	M 2.2KOHM,F,1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6527,28	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6529	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6530-35	ERJ6GEYJ470	M 47 OHM,J,1/10W	6	
R6538	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6539	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6540	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6541	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6542-47	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	6	
R6550	ERG1FJS332D	M 3.3KOHM, J, 1W	1	
R6551-53	ERJ6ENF1003	M 100KOHM, 1/10W	3	
R6554	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6555	ERJ6GEYJ104	M 100KOHM, J,1/10W	1	
R6556	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	1
R6558	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6560,61	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6563	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6565	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	+
	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GR101 IA006
R6566	+		_	D0GB101JA006
R6567	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	D0CB404 1400C
R6568	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6570	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	-
R6571-78	ERJ6GEYJ471	M 470 OHM,J,1/10W	8	
R6582,83	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	-
R6584	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	-
R6586	ERJ6GEYJ103 ERJ6GEYJ152	M 10KOHM,J,1/10W M 1.5KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6589	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6591	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6592,93	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6594	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6595,96	ERJ6ENF5231	M5.23KOHM, 1/10W	2	
R6601	ERD25V0R00	C 0 OHM, 1/4W	1	
R6605-07	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6611,12	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6619	ERJ6GEYJ240	M 24 OHM,J,1/10W	1	
R6627,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6630-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	
R6636-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6641,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6643,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R6647,48	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6655	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6656	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6661,62	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6667,68	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6669	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6670	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R6671	ERG3FJS821D	M 820 OHM, J, 3W	1	
R6672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6673	ERG1SJ100P	M 10 OHM, J, 1W	1	
R6678,79	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R6680,81	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6682-85	ERJ3GEYJ471	M 470 OHM,J,1/16W	4	
R6686-89	ERJ3GEYJ473	M 47KOHM,J,1/16W	4	
R6690,91	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R6692,93	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6694-96	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6697-99	ERJ3GEYJ473	M 47KOHM,J,1/16W	3	
R6701	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6702	ERD25V0R00	, ,	1	
		C 0 OHM, 1/4W		
R6711,12	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6719	ERJ6GEYJ240	M 24 OHM, J, 1/10W	1	DOCEMAN LANCE
R6727,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6730-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	
R6736-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6741,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	1
R6743,44	ERJ12YJ220	M 22 OHM, J, 1/2W	2	
R6747,48	ERJ6GEYJ5R6	M 5.6 OHM, J,1/10W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	Deep/c/ Maria
R6759,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6761	ERJ12YJ470	M 47 OHM, J,1/2W	1	
R6762-64	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6765	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6766-68	ERJ6GEYJ223	M 22KOHM,J,1/10W	3	
R6769,70	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	1
R6771,72	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6773	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6774	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R6777,78	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6779,80	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6783	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6784	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6785,86	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6787,88	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6790	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6791	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6801-03	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6804-06	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6807-09	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6810-12	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6818,19	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6820	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6821	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6823	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6824	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6825	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6826	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6827	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R7101-12	ERJ14YJ220	M 22 OHM, J,1/4W	12	
R7117	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7119	ERJ6ENF1651	M1.65KOHM, 1/10W	1	
R7120	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7126-28	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R7130-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7201-16	ERJ14YJ220	M 22 OHM, J,1/4W	16	
R7217	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7221-24	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R7225	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7226-33	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R8002	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R8003	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R8004 R8006,07	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R8008	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8009	ERJ3GEYJ332	M 3.3KOHM,J,1/16W M 2.2KOHM,J,1/16W	1	
R8010	ERJ3GEYJ222		1	
R8011	ERJ3GEYJ331 TAJAAH0101JV	M 330 OHM,J,1/16W	1	D0GB404 IA006
R8012	+	M 100 OHM,J,1/16W	1	D0GB101JA006
R8013	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	D0GB404 IA006
R8015	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8017-19	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R8023,24	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	2	
R8025	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	Doopted Lagge
R8026	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8027	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R8028-30	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	3	
R8033	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8035 R8036	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9008	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9010	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9018-20	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9035	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9036	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9037	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9038	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9039	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9040	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9041	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
		<u>'</u>	1	
R9045	ERJ3GEYJ102	M 1KOHM,J,1/16W		
R9046	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9047	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9048	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9049	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9050,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9052	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9053	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9058	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9059	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9060	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9061	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9063	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9064	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9065	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9068-70	ERJ6ENF2701	M 2.7KOHM, 1/10W	3	
R9071-73	ERJ6ENF1800	M 180 OHM, 1/10W	3	
R9076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9077	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9078	ERJ6ENF1800	M 180 OHM, 1/10W	1	
R9080,81	ERJ6ENF1800	M 180 OHM, 1/10W	2	
R9082	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9102,03	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9104	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9105,06	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB0003A000
•	+	M 0 OHM, 1/16W	4	DOGBTOTJAGOG
R9107-10	ERJ3GEY0R00	M 100 OHM,J,1/16W		DOCEMAN IANGE
R9113	TAJAAH0101JV		1	D0GB101JA006
R9115	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9121-29	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9200,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9204,05	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9207,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9210	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9211,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9228	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9229	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9239,40	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9241	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9242,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9244	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9245	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9247,48	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9249	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9253	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9254	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9257	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9259	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9261	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9262,63	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R9264-70	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R9271	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9274	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9275	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9285	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9286,87	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9288,89	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R9290	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9291	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R9293	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9300	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9301-05	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R9306,07	ERJ3GEY0R00	M 0 OHM, 1/16W	2	DOODTOTOAGGO
R9308	ERJ3GEYJ560	M 56 OHM, J,1/16W	1	
R9309	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9350	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9351	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	ERJ3GEYJ472		2	
R9352,53 R9354	ERJ3GEYJ272	M 4.7KOHM,J,1/16W	1	
		M 2.7KOHM,J,1/16W	2	
R9355,56	ERJ3GEYJ103	M 10KOHM,J,1/16W		
R9357	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	DOCEMAN IANGE
R9358	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9359	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9360,61	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9362-64	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R9365	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	DOOD404 LACCO
R9366-68	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R9369	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9371	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9372-75	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	4	
R9376	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9377	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9378	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9379	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9380	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9381	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9382	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9383-86	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9387-90	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R9391	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9392	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9394-00	ERJ3GEYJ102	M 1KOHM,J,1/16W	7	
R9401,02	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9403	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9404-06	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9407,08	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9409	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9410	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9411	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9413	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9414	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9416	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9417	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9418	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9419	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9420	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9421	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9425	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9426	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9427	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9429	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9432	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9434,35	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9436-39	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9440,41	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9442-49	ERJ3GEY0R00	M 0 OHM, 1/16W	8	500510107000
R9454-58	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9459	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9460,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9464	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9466	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9467	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9469	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9470	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9472,73	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9472,73	ERJ3GEYJ105		1	
	ERJ3GEY0R00	M 1MOHM,J,1/16W	1	
R9478		M 0 OHM, 1/16W		DOCEMAN IANGE
R9501	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9502-07	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R9514-19	EXB38V680J	RESISTOR ARRAY	6	
R9520,21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	DOOD404 LAGOS
R9523	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9525,26	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9527-29	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9530-32	EXB38V680J	RESISTOR ARRAY	3	
R9533	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9535-43	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9548	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9549	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9551	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555-58	ERJ8RSJR10V	M 1 OHM, 1/8W	4	
R9559	ERJ6ENF1301	M 1.3KOHM, 1/10W	1	
R9560	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9561	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9562	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9563	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R9564	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9565	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R9566	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9567	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9568,69	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9572	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9573	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9576	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9577	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9578	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9581	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9582-85	ERJ3GEYJ330	M 33 OHM,J,1/16W	4	
R9588	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9601	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9607,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9609	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9616	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9617,18	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9619,20	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9624,25	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9626	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9629	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9630	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9632-34	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R9635-39	ERJ3GEYJ100	M 10 OHM,J,1/16W	5	
R9642-45	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9652	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9654	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9656	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9701	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9702	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9703	ERJ3GEYJ103		1	
R9703	ERJ3GEY0R00	M 10KOHM,J,1/16W  M 0 OHM, 1/16W	4	
R9704-07	ERJ3GEYJ103		1	
		M 10KOHM,J,1/16W  M 0 OHM, 1/16W		
R9710-12 R9714	ERJ3GEY0R00 EXB38V103J	,	1	
-		RESISTOR ARRAY	<u> </u>	
R9715-17	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9718,19	EXB38V103J	RESISTOR ARRAY	2	
R9720	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9722,23	EXB38V103J	RESISTOR ARRAY	2	
R9725	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9726	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9727	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9728	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9729	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9730	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9732	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9742	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9743	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9744,45	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9746	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9747,48	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9749	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9750	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9755-57	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9758-62	ERJ3GEYJ151	M 150 OHM,J,1/16W	5	
R9765-71	ERJ3GEYJ151	M 150 OHM,J,1/16W	7	
R9775	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9801,02	EXB38V103J	RESISTOR ARRAY	2	
R9803-05	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9806	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9809-11	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9813	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9814	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9816-18	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9819	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9821	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9823-30	ERJ3GEYJ103	M 10KOHM,J,1/16W	8	
R9831	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9832-35	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9836,37	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9838	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9839,40	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9841	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9842,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9844-46	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R9851-71	EXB38V470J	RESISTOR ARRAY	21	
R9872-76	TAJAAH0470JV		5	D0GB470JA006
R9877	ERJ3GEY0R00	M 47 OHM, J,1/16W	1	D0GB470JA006
R9878	EXB38V151J	M 0 OHM, 1/16W RESISTOR ARRAY	1	
	ERJ3GEYJ151		2	
R9879,80 R9881	EXB38V680J	M 150 OHM,J,1/16W RESISTOR ARRAY	1	
R9882	TAJAAH0680JV		1	D0GB680JA006
		M 68 OHM, J,1/16W		DUGBOOUJAUUG
R9883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	D0CD470 IA00C
R9884-88	TAJAAH0470JV	M 47 OHM, J,1/16W	5	D0GB470JA006
R9890,91	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9894,95	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9902,03	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9910	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	DOOD404 LAGOS
R9911	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9912	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	D00D40414000
R9913,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9916	ERJ3GEY0R00	M 0 OHM, 1/16W	1	D00D404 14000
R9917	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9920	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9921	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	D00D404 14000
R9927	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9929	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9930	EXB38V103J	RESISTOR ARRAY	1	
R9931,32	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9933-38	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9939	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9940,41	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9942	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9944	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9945,46	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9947	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9948	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9949	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9950	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9951,52	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9954,55	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9958	ERJ3GEYJ474	M 470KOHM,J,1/16W	1	
R9959	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R9960	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9961,62	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	DOOD404 LAGOS
R9965	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9966	ERJ3GEYJ473	M 47KOHM,J,1/16W	+ -	
R9967,68 R9977	ERJ3GEYJ103 ERJ3GEYJ223	M 10KOHM,J,1/16W M 22KOHM,J,1/16W	1	
R9977,	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9980	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
			•	
RL501	TSEH0025	RELAY	1	K6B2AGA00020 🗥
RL502	K6B1AGA00086	RELAY	1	<u>A</u>
			-	1
RM001	PNA4601M05TV	REMOCO RECEIVER	1	
KWIOOT	FIVA4001W031V	REMOCO RECEIVER	'	
RTL	TNPA2540	CIRCUIT BOARD C1	1	Δ
RTL	TNPA2541	CIRCUIT BOARD C2	1	<u> </u>
RTL	TNPA2583	CIRCUIT BOARD SU	1	<u></u>
RTL	TNPA2584	CIRCUIT BOARD SD	1	<u>~</u>
RTL	TNPA2249	CIRCUIT BOARD H3	1	<u>~</u>
RTL	TXN/F10MMS	CIRCUIT BOARD F	1	Δ
RTL	TNPA2590	CIRCUIT BOARD Z	1	Δ
RTL		CIRCUIT BOARD D1		
	TZTNP01MMSB		1	Δ
RTL	TNPA2589	CIRCUIT BOARD D2	1	Δ
RTL	TNPA2598	CIRCUIT BOARD P	1	⚠
RTL	TNPA2534	CIRCUIT BOARD SC	1	Δ
RTL	TNPA2535	CIRCUIT BOARD SS	1	Δ
RTL	TNPA2536	CIRCUIT BOARD SS2	1	Δ
RTL	TNPA2537	CIRCUIT BOARD SS3	1	A
RTL	TNPA2622	CIRCUIT BOARD S1	1	Δ
RTL	TNPA2621	CIRCUIT BOARD V1	1	Δ
RTL	TXNHZ40JJS	CIRCUIT BOARD HZ	1	Δ
RTL	TZTNP020JAS	CIRCUIT BOARD HX	1	Δ
2061	TSE4CD0004	DOWED SWITCH	4	K0E463B00003
S061	TSE4GD0001	POWER SWITCH	1 2	K0F162B00002
S1554-56	EVQPBD05R	SWITCH	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
SC2	TJS3A9670	6P CONNECTOR	1	K1KA06A00179
SC20	K1KA08A00232	8P CONNECTOR	1	
SC21	K1KA11A00078	11P CONNECTOR	1	
SC23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SC41-44	K1KB40B00015	40P CONNECTOR	4	
SD1-D3	K1MN80B00004	80P CONNECTOR	3	
SS11	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
SS12	K1KA05A00139	5P CONNECTOR	1	
SS23	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
SS34	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SS40	K1KB07A00037	7P CONNECTOR	1	
SS41-46	TJSF41013	13P CONNECTOR	6	K1MN13B00020
SS47	K1KB07A00037	7P CONNECTOR	1	
SS48,49	K1KA07A00170	7P CONNECTOR	2	
SU1-U3	K1MN80B00004	80P CONNECTOR	3	
T501	G4D4A0000049	SWITCHING TRANSFORMER	1	A.
				Δ.
T502	G4D4A0000050	SWITCHING TRANSFORMER	1	<u>A</u>
T503	ETS25AD1C3AG	SWITCHING TRANSFORMER	1	⚠
T6451	G4D1A0000055	SWITCHING TRANSFORMER	1	
T6471	G4D1A0000055	SWITCHING TRANSFORMER	1	
V34	K1KA08B00005	8P CONNECTOR	1	
V34	KTKAOOBOOOOS	UI CONNECTOR	•	
X3801	H0J202500002	CRYSTAL	1	
X9200	H1A3305B0005	CRYSTAL	1	
X9350	TSSA120	CRYSTAL	1	H0J327200038
X9450	TSSA081	CRYSTAL	1	H0J245500024
X9451	TSS9038-B	CRYSTAL	1	H0J200500016
X9601	H1A5005B0015	CRYSTAL	1	
X9602	H1A6505B0004	CRYSTAL	1	
X9603	H1A6005B0008	CRYSTAL	1	
X9701	TSS9038-B	CRYSTAL	1	H0J200500016
X9901	H0J921400003	CRYSTAL	1	
72	T 191 A 2000	PHONO PIN (3P)	1	K1K403B00045
Z3	TJS1A8090	PHONO PIN (3P)		K1KA03B00045
Z4	TJS1A8100	PHONO PIN (4P)	1	K1KA04B00056
Z6	TJS1A8830	CONNECTOR	1	K1KA07A00056
Z10	TJS1A8800	4P CONNECTOR	1	K1KA04A00242
Z17	TJS1A8840	8P CONNECTOR	1	K1KA08A00221

## 17.3. 42 inch Models (Except UY/ YZ Version) Electrical Replacement List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
044	I//III/IODDOOOO	0011150700	4	
C11	K1MN80B00002	CONNECTOR	1	
C12	K1MN20B00043	CONNECTOR	1	
C21	K1MN80B00002	CONNECTOR	1	
C22	K1MN20B00043	CONNECTOR	1	
C23	K1KA11A00102	11P CONNECTOR	1	
C24	K1KA08A00232	8P CONNECTOR	1	
C081	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C402	ECA1EHG101	E 100UF, 25V	1	
C410-12	ECKDAE472ZE	C 4700PF, Z,	3	⚠
C413	ECA2WHG100	E 10UF, 450V	1	
C415	ECA1HHG220	E 22UF, 50V	1	
C416	ECQV1H104JM	P 0.1UF, J, 50V	1	
C417	ECKD3D392KBP	C 3900PF, K, 2KV	1	
C418	ECA1EHG470	E 47UF, 25V	1	
C419	ECKD2H821KB2	C 820PF, K,500V	1	ECKD2H821KB5
C420	ECQV1H104JM	P 0.1UF, J, 50V	1	
C421	ECA1EHG470	E 47UF, 25V	1	
C422,23	ECKD2H561KB2	C 560PF, K,500V	2	
C424	EEUFC1C471	E 470UF, 16V	1	
C425	ECA1EHG102	E 1000UF, 25V	1	
C427	ECA1AHG471	E 4700UF, 10V	1	
C428	ECA1EHG470	E 47UF, 25V	1	
C429,30	ECKF1H223ZF	C 0.022UF, Z, 50V	2	
C431-33	ECKDAE472ZE	C 4700PF, Z,	3	Δ
C434	ECQE6105JF	P 1UF, J,630V	1	
C435	EEUFC1V331	E 220UF, 35V	1	
C436	ECQB1H103JF	P 0.01UF, J, 50V	1	
C437	ECQB1H821KF	P 820PF, K, 50V	1	
C438	EEUFC1H330	E 33UF, 50V	1	
C439	ECQB1H101KF	P 100UF, K, 50V	1	
C440	ECQB1H331JF	P 330UF, K, 50V	1	ECQB1H331JF3
C441	ECQB1H103JF	P 0.01UF, J, 50V	1	
C442	ECQB1H104JF	P 0.1UF, J, 50V	1	
C443	ECQV1H564JM	P 0.56UF, J, 50V	1	ECQV1H564JL
C444	ECA1HHG010	E 1UF, 50V	1	
C445	ECKD3D101KBP	C 100PF, K, 2KV	1	
C447,48	EETHC2W331L	E 330UF, 450V	2	Δ
C449	ECQB1H104JF	P 0.1UF, J, 50V	1	
C450	ECA1EHG331	E 330UF, 25V	1	
C452	EEUEB1H220	E 22UF, 50V	1	
C501	ECA1HHG100	E 10UF, 50V	1	
C503	ECQB1H103JF	P 0.01UF, J, 50V	1	
C504	ECKF1H101KB	C 100PF, K, 50V	1	
C505	ECQB1H102JF	P 1000PF, J, 50V	1	
C506	ECQB1H122JF	P 1200PF, J, 50V	1	
C508	ECQB1H102JF	P 1000PF, J, 50V	1	
C509	ECKF1H471KB	C 470PF, K, 50V	1	
C510	ECKD3D221KBP	C 220PF, K, 2KV	1	
C511	ECA1EHG221	E 220UF, 25V	1	
C512	ECQB1H102JF	P 1000PF, J, 50V	1	
C513	EEUEB1E101	E 100UF, 25V	1	
C514	ECKD3D101KBP	C 100PF, K, 2KV	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C515,16	ECQE6473KF	P 0.047UF, K,630V	2	
C518	ECA1EHG101	E 100UF, 25V	1	
C520	EEUEB1E221SB	E 220UF, 25V	1	
C521	ECQB1H103JF	P 0.01UF, J, 50V	1	
C523	ECKCNA102MBB	C 1000PF, Z,	1	Δ
C524	ECKD3D102KBP	C 1000PF, K, 2KV	1	
C525	EETHC2C821B	E 820UF, 160V	1	
C526	ECKD3A101KBP	C 100PF, K, 1KV	1	
C527,28	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C530	ECKD3A101KBP	C 100PF, K, 1KV	1	
C531	ECKD2H103ZU	C 0.01UF, Z,500V	1	
C532	EETHC2D182L	E 1800UF, 200V	1	
C533	ECKD3A471KBP	C 470PF, K, 1KV	1	
C534,35	ECQB1H103JF	P 0.01UF, J, 50V	2	
C536	EETHC2D182L	E 1800UF, 200V	1	
C537,38	ECKD3A101KBP	C 100PF, K, 1KV	2	
C539	EEUEB1H220	E 22UF, 50V	1	
C540	ECA1EHG472	E 4700UF, 25V	1	
C541	ECA1EHG222	E 2200UF, 25V	1	
C542,43	ECQB1H103JF	P 0.01UF, J, 50V	2	
C544-46	ECA1EHG222	E 2200UF, 25V	3	
C547	ECQB1H103JF	P 0.01UF, J, 50V	1	
C548	ECQB1H332JF	P 3300PF, J, 50V	1	
C549,50	EEUFC1V151	E 150UF, 35V	2	
C551	EEUFC0J122	E 1200UF, 6.3V	1	
C552	ECQV1H105JM	P 1UF, J, 50V	1	
C553-55	ECKF1H103ZF	C 0.01UF, Z, 50V	3	
C556	ECA1EHG471	E 470UF, 25V	1	
C557	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C558	ECA1HHG101	E 100UF, 50V	1	
C559	ECA1EHG101	E 100UF, 25V	1	
C560	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C561	ECA1EHG101	E 100UF, 25V	1	
C562-65	ECKF1H103ZF	C 0.01UF, Z, 50V	4	
C566	ECA1EHG101	E 100UF, 25V	1	
C900,01	ECQU2A224BN9	P 0.22UF, 250V	2	Δ
C902	ECQU2A105BN9	P 1UF, 250V	1	Δ
C903-06	ECKCNA221KB7	C 220PF	4	Δ
C2312	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2313	ECA1HHG470	E 47UF, 50V	1	
C2314	EEVHB1C470	E 47UF, 16V	1	
C2316,17	ECQV1H474JM	P 0.47UF, J, 50V	2	
C2318,19	ECJ2XC1H561J	C 560PF, J, 50V	2	
C2320-22	ECJ2VF1H104Z	C 0.1UF, Z, 50V	3	
C2323	ECA1HHG221	E 220UF, 50V	1	
C2324	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2325	ECA1HHG221	E 220UF, 50V	1	
C2326,27	ECJ2XC1H221J	C 220PF, J, 50V	2	
C2328,29	ECJ2VF1H104Z	C 0.1UF, Z, 50V	2	
C2330	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2331	ECJ2XC1H101J	C 100PF, J, 50V	1	
C2332	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2333	ECJ2XC1H101J	C 100PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2334,35	TCUY1C225KBM	C 2.2UF, 16V	2	F1K1C225A026
C2336,37	ECJ2XB1H473K	C 0.047UF, K, 50V	2	
C2338,39	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2340-43	ECJ2VF1H104Z	C 0.1UF, Z, 50V	4	
C2344-47	EEUGZ1D102SB	E 1000UF, 20V	4	
C2348	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2349,50	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2417	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C2419	EEVHB1C100	E 10UF, 16V	1	
C2422	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C2423	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2426	ECJ2XB1H153K	C 0.015UF, K, 50V	1	
C2427	EEVHB1C100	E 10UF, 16V	1	
C2429	EEAGA1C101	E 100UF, 16V	1	
C2431	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2433	ECJ2XB1H393K	C 0.039UF, K, 50V	1	
C2434	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C2435	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2436	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2437,38	EEAGA1C101	E 100UF, 16V	2	
C2440,41	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2442	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2450	EEVHB1C100	E 10UF, 16V	1	
C2451	EEVHB1E4R7	E 4.7UF, 25V	1	
C2451	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2452	ECJ2VF1H104Z		1	
C2454	EEVHB1E4R7	C 0.1UF, Z, 50V	1	
		E 4.7UF, 25V	1	
C2457	EEVHB1E4R7	E 4.7UF, 25V		
C2458	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2459	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2460	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2461	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2463	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2466,67	ECJ3VB1C104K	C 0.10UF, K, 16V	2	
C2480	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2484	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3001-03	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3004	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3005-07	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3008,09	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3010-12	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3013,14	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3015-17	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3018	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3019	EEVHB1C470	E 47UF, 16V	1	
C3020	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3021	EEVHB1C470	E 47UF, 16V	1	
C3022	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3023	EEVHB1C470	E 47UF, 16V	1	
C3024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3026	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3027	EEVHB1C470	E 47UF, 16V	1	
C3028	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3029	EEVHB1C470	E 47UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3030,31	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3032	EEVHB1C470	E 47UF, 16V	1	
C3033-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3036	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3037-39	EEVHB1C470	E 47UF, 16V	3	
C3040,41	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3042	EEVHB1C470	E 47UF, 16V	1	
C3049,50	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C3301,02	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C3303,04	EEVHB1C470	E 47UF, 16V	2	
C3305	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3306,07	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3309	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3310	EEVHB1C470	E 47UF, 16V	1	
C3311	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3312.13	EEVHB1C470	E 47UF, 16V	2	
, ,		· ·	1	
C3314	ECJ2VF1C104Z	C 0.1UF, Z, 16V		
C3351,52	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3353-60	ECJ2VF1C105Z	C 1UF, Z, 16V	8	
C3361	EEVHB1C470	E 47UF, 16V	1	
C3362	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3363	EEVHB1C470	E 47UF, 16V	1	
C3364	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3365	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3404	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3405	EEVHB1C470	E 47UF, 16V	1	
C3406	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3407	EEVHB1C470	E 47UF, 16V	1	
C3409	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3410	EEVHB1C470	E 47UF, 16V	1	
C3501	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3502	EEVHP1E220	E 22UF, 25V	1	
C3503,04	EEVHP1E100	E 10UF, 25V	2	
C3505	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3506	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C3507	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3509-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3516-18	EEVHB1C470	E 47UF, 16V	3	
C3520	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3521	EEVHB1C470	E 47UF, 16V	1	
C3523	EEVHB1C470	E 47UF, 16V	1	
C3524	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3529-31	ECJ3XB0J106M	C 10UF, M,6.3V	3	
C3533,34	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3542	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3544	EEVHB1C470	E 47UF, 16V	1	
C3550	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3551	EEVHB1C470	E 47UF, 16V	1	
C3561,62	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3591,92	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3593	ECJ2VF1E104Z	C 0.1UF, Z, 25V	1	
C3594,95	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3700	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
<u> </u>	1	<u> </u>		L

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3702	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3703	EEVHB1C470	E 47UF, 16V	1	
C3704	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3706	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3708	EEVHB0G221	E 220UF, 4V	1	
C3709	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3710-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3714	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3715	EEVHB0G221	E 220UF, 4V	1	
C3716	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3717,18	EEVHB1C470	E 47UF, 16V	2	
C3723	EEVHB1C470	E 47UF, 16V	1	
C3726	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3727,28	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3729	ECJ2XB1H471K	C 470PF, K, 50V	1	
C3801	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3802	EEVHB1C470	E 47UF, 16V	1	
C3803	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3804	ECJ1XC1H470J	C 47PF, J, 50V	1	
C3805	ECJ1XC1H220J	C 22PF, J, 50V	1	
C3806	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3808	EEVHP1E220	E 22UF, 25V	1	
C3809	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3810	EEVHB0J220	E 22UF 6.3V	1	T TROUGEST TOO
C3812	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3815	EEVHB1C470	E 47UF, 16V	1	
C3816	EEVHP1E100	E 10UF, 25V	1	
C3817	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3818	ECJ1VB1H103K	C 0.01UF, K, 50V	1	FIROSSSAUGS
C3819	ECJ2VF1C105Z		1	
C3820	ECJ1XF1C104Z	C 1UF, Z, 16V	1	
		C 0.1UF, Z, 16V		
C3821	ECJ1VB1H103K	C 0.01UF, K, 50V	1	EEV/LIDO 1404D
C3823	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3824,25	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3828,29	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3830,31	ECJ1XC1H180J	C 18PF, J, 50V	2	
C3832-34	ECJ2VF1C105Z	C 1UF, Z, 16V	3	E41/0 1005 4000
C3835	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3836-38	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3840	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3841	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3842	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3843	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3844	EEVHB0J152	E 1500UF, 6.3V	1	
C3845,46	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3848-50	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3852,53	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3854	ECJ1VC1H080C	C 8PF, C, 50V	1	
C3855-57	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3858	EEVHB0G221	E 220UF, 4V	1	
C3859,60	EEVHB0J152	E 1500UF, 6.3V	2	
C3861	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3862	ECJ1VB1H103K	C 0.01UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3863	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3864	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3865	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3866	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3867	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3868	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3869	ECJ1XC1H330J	C 33PF, J, 50V	1	
C3870,71	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3872	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3873	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3874	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3875	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3876	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C3877	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3878-83	ECJ2VF1C105Z	C 1UF, Z, 16V	6	
C3884	ECJ1VB1H153K	C 0.15UF, K, 50V	1	
C3885	ECJ1VB1H193K	C 1UF, Z, 16V	1	
C3886	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3887	ECJ2VF1C105Z	C 1UF, Z, 16V	1	1 11000000
C3888	ECJ2VF1C1032 ECJ1XC1H101J	C 100PF, J, 50V	1	
C3889	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C3890	ECJ3XB0J106M	C 10UF, M,6.3V	1	
	ECJ2VF1C105Z		2	
C3891,92		C 1UF, Z, 16V		E4K0 1225 4002
C3893	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3894	EEVHB0G221	E 220UF, 4V	1	
C3896	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3897	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3898	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3899	ECJ1XC1H330J	C 33PF, J, 50V	1	
C4518	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C4551	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6401-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6411	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6412	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6417	ECJ2XB1H221K	C 220PF, K, 50V	1	
C6421	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6422	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6427	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6429	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6431	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6433	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6452	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6453	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6454	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6455	EEUFC1E221	E 220UF, 25V	1	
C6456	ECA2CM101	E 100UF, 160V	1	
C6457	EEUFC1E221	E 220UF, 25V	1	
C6458	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	EEUFC1E221	E 220UF, 25V	1	
C6462,63	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6464,65	ECA2CHG2R2	E 2.2UF, 160V	2	
C6472	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6473	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2AHG470	E 47UF, 100V	1	
C6481-88	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6490,91	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6492	ECA2VHG100	E 10UF, 350V	1	
C6493	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6501-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6511,12	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6513	ECA2CM101	E 100UF, 160V	1	
C6521	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6522	EEUFC1E470	E 47UF, 25V	1	
C6524,25	ECJ3FC2D102J	C 1000PF, J,200V	2	
C6526	ECA2EHG4R7	E 4.7UF, 250V	1	
C6529	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6534	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6540	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6541,42	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6543,44	ECJ3FC2D102J	C 1000PF, J,200V	2	
C6545	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6546	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6547	ECJ3FC2D102J	C 1000PF, J,200V	1	1 13101030000
C6550	ECA2AHG470	E 47UF, 100V	1	
C6571,72	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6571,72	TCUY1C105ZFN	-	5	F1J1C1050006
	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6580,81		C 1UF, 16V	1	F131C1030000
C6584	ECJ3YB1E105K	C 1UF, K, 25V		E4 14C40E0006
C6585	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6598	ECA2CHG220	E 22UF, 160V	1	
C6601-04	F2A2D1510004	E 150UF, 200V	4	
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6608	EEUFC1E471	E 470UF, 25V	1	
C6611-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6621-28	ECQE2105RKB	P 1UF, 250V	8	
C6631,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6633	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6634,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6636	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6637	EEUFC1E121	E 120UF, 25V	1	
C6638	ECWU1224KC9	P 0.22UF, 100V	1	
C6639	F2A2D1510004	E 150UF, 200V	1	
C6642	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6644	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6645	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6646	EEUFC1E121	E 120UF, 25V	1	
C6647	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6655,56	EEUFC1A101	E 100UF, 10V	2	
C6660-77	ECJ3XK2J102K	C 1000PF, K,630V	18	
C6695,96	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6701-04	F2A2D1510004	E 150UF, 200V	4	
C6707,08	EEUED2C470	E 47UF, 160V	2	
C6711-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6721-28	ECQE2105RKB	P 1UF, 250V	8	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6731,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6733	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6734,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6736	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6738	ECWU1224KC9	P 0.22UF, 100V	1	
C6739	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6740	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6741,42	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6744	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6745,46	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6747	F2A2D1510004	E 150UF, 200V	1	
C6748	EEUFC1E221	E 220UF, 25V	1	
C6749	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6750,51	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6753,54	EEUFC1E221	E 220UF, 25V	2	
C6755	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6756	EEUFC1A101	E 100UF, 10V	1	
C6760,61	ECJ3XK2J102K	C 1000F, K,630V	2	
C6771-78	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6781	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6786	ECJ3XK2J102K	C 1000FF, K,630V	1	+
C7101	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7102	ECJ3XB0J106M	C 10UF, M,6.3V	1	1 1010100000
C7104-06	TCUY1C105ZFN	C 1UF, 16V	3	F1J1C1050006
C7104-00	F1K2A1040004	C 0.1UF, 100V	1	F131C1030000
C7113	F1K2A1040004	C 0.1UF, 100V	1	
C7115	F1K2A1040004		1	
		C 0.1UF, 100V	1	
C7117	F1K2A1040004	C 0.1UF, 100V		E4 14 C4 0 E 0 0 0 C
C7131	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7132-34	ECJ3XB0J106M	C 10UF, M,6.3V	3	E4 14 04 0 E 0 0 0 0
C7201	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7202	ECJ3XB0J106M	C 10UF, M,6.3V	1	E4.14.04.050000
C7203-06	TCUY1C105ZFN	C 1UF, 16V	4	F1J1C1050006
C7207	F1K2A1040004	C 0.1UF, 100V	1	E4 14 0 4 0 E 0 0 0 0
C7210	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7211	F1K2A1040004	C 0.1UF, 100V	1	
C7213	F1K2A1040004	C 0.1UF, 100V	1	
C7215	F1K2A1040004	C 0.1UF, 100V	1	
C7217	F1K2A1040004	C 0.1UF, 100V	1	-
C8001	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8002	EEVHP1E220	E 22UF, 25V	1	-
C8003	ECJ1VB1H471K	C 470PF, K, 50V	1	
C8005	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8008	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8009	TCUY1C475ZFM	C 4.7UF, 16V	1	F1K1C4750018
C8010	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C8011	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8012	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C8013	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C8014,15	ECJ1VB1H103K	C 0.01UF, K, 50V	2	
C8016	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8017	EEVHB1C470	E 47UF, 16V	1	
C8018	ECJ1XC1H102J	C 1000PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8019	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C8020	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8021	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9000,01	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9002	EEVHB1C470	E 47UF, 16V	1	
C9003	EEVHB0G221	E 220UF, 4V	1	
C9004	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9005	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9008-10	EEVHP1E220	E 22UF, 25V	3	
C9011	EEVHB1C470	E 47UF, 16V	1	
C9012	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9014	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9015	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9016	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9017-19	ECJ1XC1H030C	C 3PF, C, 50V	3	
C9017-19 C9021-24	ECJ1XF1C104Z		4	
		C 0.1UF, Z, 16V		
C9025,26	ECJ2VB1E473K	C 0.047UF, K, 25V	2	
C9027	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9028	ECJ2VB1E473K	C 0.047UF, K, 25V	1	E41/0 loop 4 5 = 5
C9031	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9032,33	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9034	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9035	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9036	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9037-39	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9040	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C9041	ECJ1VB1H392K	C 3900PF, K, 50V	1	
C9042	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9045	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9048,49	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9054	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9202	EEVHB0J330	E 33UF, 6.3V	1	
C9203	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9204-06	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9208-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9213	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9215	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9216	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9217	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9218-20	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9225,26	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9229	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9236,37	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9243-46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9255	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	E1 11C40E0000
C9256	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9258-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	E4 14040E0000
C9261	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9262	ECUX1H822JCM	C 8200PF, K, 50V	1	
C9263	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C9264	ECJ2VB1E563K	C 0.056UF, K, 25V	1	
C9265	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9266	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9267	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9268	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9269	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9300	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9304,05	EEVHB0G221	E 220UF, 4V	2	
C9306-08	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C9310	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9312	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9314	EEVHB0G221	E 220UF, 4V	1	
C9315	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9316	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9317	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9318	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9319	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9320	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	1 1110000071000
C9320 C9321	ECJ1XB1C104K	C 0.10F, Z, 16V	1	
C9353	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9353	ECJ1XF1H102Z ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9355	EEVHB1C470		1	
C9355	ECJ1XF1H102Z	E 47UF, 16V C 1000PF, Z, 50V	1	
C9356 C9357	EEVHB1C470		1	
C9357	ECJ1XF1C104Z	E 47UF, 16V	1	
		C 0.1UF, Z, 16V		
C9361-66	ECJ1XC1H101J	C 100PF, J, 50V	6	
C9367	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9368	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9369,70	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9371	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9372	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	E4.14.04.0F0000
C9373	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9374	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9375	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9377,78	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9379,80	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9381	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9382	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9383	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9385	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9387,88	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9390,91	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9392	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9393	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9400	EECS5R5V155	E 1.5UF, 5.5V	1	
C9401	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9402,03	ECJ1XC1H150J	C 15PF, J, 50V	2	
C9450	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9451	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9452,53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9454	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9455-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9464	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9465	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9466,67	ECJ1XC1H330J	C 33PF, J, 50V	2	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9469	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9470	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9472	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9501,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9503	EEVHB1C470	E 47UF, 16V	1	
C9504	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9505	EEVHB1C470	E 47UF, 16V	1	
C9506	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9507	F2G0J1010021	E 100UF 6.3V	1	
C9509,10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9551	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9552,53	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C9554	F2G0J1010021	E 100UF 6.3V	1	
C9555,56	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C9557,58	F2G1C4700030	E 47UF, 16V	2	
C9559	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9559	ECJ2XB1H102K	C 0.01UF, K, 50V	1	
C9561,62	F2G1C4700030	E 47UF, 16V	2	
C9563	F2G0J1010021	E 100UF 6.3V	1	
C9564	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9565	EEVHB0G221	E 220UF, 4V	1	
C9566	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9567	TCUY0J685MBM		1	F1K0J685A003
		C 6.8UF, 6.3V		FIRUJOOJAUUS
C9570	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9572	EEVHB0G221	E 220UF, 4V	1	
C9573	F2G0J1010021	E 100UF 6.3V	1	
C9574	EEVHB1C470	E 47UF, 16V	1	
C9575,76	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9577	F2G0J1010021	E 100UF 6.3V	1	
C9578	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9579	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9601	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9602	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1 -	
C9603-07	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9608	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9610	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9611-16	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9619	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9620-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9625	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9627,28	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9629	ECJ1XC1H331J	C 330PF, J, 50V	1	
C9630	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9631	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9632	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9633,34	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9635	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9701	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9702-05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9706	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9707-10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9713	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9715	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9716	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9717	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9718,19	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9720	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9721,22	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9723	ECJ1XC1H471J	C 470PF, J, 50V	1	
C9724,25	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9726-28	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9730	EEVHB1C470	E 47UF, 16V	1	
C9731	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9732	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9801-03	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9805-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	18	
C9826	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9827	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9828	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9829	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9901,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9903	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9904,05	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9910	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C9911	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9912	EEVHB1C470	E 47UF, 16V	1	
C9913	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9914	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9915	ECJ1VB1C563K	C 0.056UF, K, 16V	1	
C9916	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9918	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9923	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C9925	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9926	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
CB1-B7	K1MN80B00004	80P CONNECTOR	7	
D1	K1KA50B00064	50P CONNECTOR	1	
D2,D3	K1KA40B00076	40P CONNECTOR	2	
D4	K1KA12B00066	CONNECTOR	1	
D10	K1KA04A00199	CONNECTOR	1	
D12,13	K1KA50A00125	CONNECTOR	2	
D16	K1KA10A00317	10P CONNECTOR	1	
D17	K1KA08A00293	8P CONNECTOR	1	
D20	K1KA08A00232	8P CONNECTOR	1	
D21	K1KA11A00078	11P CONNECTOR	1	
D22,23	K1KA50A00125	CONNECTOR	2	
D25	K1KA11A00102	11P CONNECTOR	1	
D26	K1KA10A00317	10P CONNECTOR	1	
D27	K1KA09A00077	9P CONNECTOR	1	
D31,32	K1MN80B00002	CONNECTOR	2	
D081	LNJ107W5PRW	LED	1	
D081	MA8056M	ZENER DIODE	1	MAZ80560M
D401-03		DIODE	3	MA2C165
	MA165		+	
D411	S1WBA80	DIODE	1	B0EBKT000003 🗥
D413	MA4082L	ZENER DIODE	1	MAZ40820L
D414	D1NL40V70	DIODE	1	B0HALP000002
D415	ERA22-10	DIODE	1	B0EAEV000002

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D416	PC123FY2	PHOTO COUPLER	1	B3PAA000012 A
D417	MA4051M	ZENER DIODE	1	MAZ40510M
D418,19	EU02	DIODE	2	
0420	ERA22-04	DIODE	1	B0HAGP000001
0421	ERA15-02	DIODE	1	B0EAKM000016
0422	MA4056M	ZENER DIODE	1	MAZ40560M
D431	B0FBBR000019	DIODE	1	Δ
0432	D1NL20UV70	DIODE	1	B0HAMM000072
0433	MA4270L	ZENER DIODE	1	MAZ42700L
0434	D1NL20UV70	DIODE	1	B0HAMM000072
0436	TVSRM10B	DIODE	1	B0EAKT000009
0438	D5L60F4015	DIODE	1	B0HARR000003 A
D439	MA4100M	ZENER DIODE	1	MAZ41000M
			2	
0440,41 0442	MA4270M MA4150M	ZENER DIODE  ZENER DIODE	1	MAZ42700M MAZ41500M
0442 0443,44	ERA22-04	DIODE	2	B0HAGP000001
D443,44 D501	AK04	DIODE	1	B0JAMC00003
0502	B0BA02700021	DIODE	1	BUJAWICUUUUS
			1	PO IAMCOOOOO2
D503 D505,06	AK04 ERA22-04	DIODE	2	B0JAMC000003 B0HAGP000001
)505,06 )507	TMPG10G3	DIODE	1	B0BA01000046
D507 D508	ERA22-04	DIODE	1	B0HAGP000001
D509	TMPG10G3	DIODE	1	B0BA01000046
)510 )510	ERA22-04	DIODE	1	B0HAGP000001
D510 D511,12	RC3B2LFU1	DIODE	2	BUTAGFUUUUT
D511,12 D514	ERA22-04	DIODE	1	B0HAGP000001
D515,16	PC123FY2	PHOTO COUPLER	2	B3PAA0000012
D517	FMLG16S	DIODE	1	B0HARR000008
D517 D518	MA4056M	ZENER DIODE	1	MAZ40560M
D519	FMLG16S	DIODE	1	B0HARR000008
D520	ERA22-04	DIODE	1	B0HAGP000001
D520 D521	ERC91-02	DIODE	1	B0HAPM000003
D522	FML-G12S	DIODE	1	BOTTAL INTOCOCCO
D523,24	ERC91-02	DIODE	2	B0HAPM000003
D525,24 D525	MA700A	DIODE	1	MA2C700A
D526	D1NL40V70	DIODE	1	B0HALP000002
D527,28	MA167	DIODE	2	MA2C167
D531	ERA22-04	DIODE	1	B0HAGP000001
0532,33	MA167	DIODE	2	MA2C167
D534	ERA22-04	DIODE	1	B0HAGP000001
D535,36	MA165	DIODE	2	MA2C165
D537	AK04	DIODE	1	B0JAMC00003
D538-40	ERA22-04	DIODE	3	B0HAGP000001
D541	MA165	DIODE	1	MA2C165
0542	MA4047H	ZENER DIODE	1	MAZ40470H
D543	MA4039H	ZENER DIODE	1	MAZ40390H
D544	MA4056H	ZENER DIODE	1	MAZ40560H
D900	ERZV10V621P2	VARISTOR	1	<u>A</u>
D2301-04	M1FS4	DIODE	4	B0JCME000025
D2305,06	RU4AM	DIODE	2	MAQ 1444
D2307	MA111	DIODE	1	MA2J111

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D2316	M1FS4	DIODE	1	B0JCME000025
D3001	MA111	DIODE	1	MA2J111
D3002	M1FS4	DIODE	1	
D3351,52	MA153	DIODE	2	MA3X153
D3501-04	MA3056M	ZENER DIODE	4	MAZ30560M
D3505,06	MA153	DIODE	2	MA3X153
D3507	MA111	DIODE	1	MA2J111
D6401-03	MA8056H	ZENER DIODE	3	MAZ80560H
D6405	D1FL40F4063	DIODE	1	B0ECHP000001
D6406,07	MA8056H	ZENER DIODE	2	MAZ80560H
D6409-12	D1FL40F4063	DIODE	4	B0ECHP000001
D6452,53	MA111	DIODE	2	MA2J111
D6454	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6455	MA111	DIODE	1	MA2J111
D6456	D1FL40F4063	DIODE	1	B0ECHP000001
D6457	M1FL20UF4063	DIODE	1	B0HCMM000009
D6457	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6458	MA111	DIODE	1	MA2J111
D6459 D6460,61	B0HCKS000001	DIODE	2	
D6465,66	MA8330M	ZENER DIODE	2	MAZ83300M
D6467	TLP181	PHOTO COUPLER	1	B3PBA000081
D6467	MA111	DIODE	1	MA2J111
D6469		PHOTO COUPLER	1	B3PBA000081
	TLP181		1	
D6470	MA111	DIODE	+ -	MA2J111
D6472,73	MA111	DIODE	2	MA2J111
D6474	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6475	MA111	DIODE	1	MA2J111
D6476	D1FL40F4063	DIODE	1	B0ECHP000001
D6477	MA8051L	ZENER DIODE	1	MAZ80510LL
D6478	B0HCKS000001	DIODE	1	NA A O 1444
D6479	MA111	DIODE	1	MA2J111
D6480	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6481,82	MA8330M	ZENER DIODE	2	MAZ83300M
D6491,92	D1FL40F4063	DIODE	2	B0ECHP000001
D6495	B0HCKS000001	DIODE	1	
D6501-08	K7GBZEE00002	PHOTO COUPLER	8	
D6509	MA111	DIODE	1	MA2J111
D6511	M1FL20UF4063	DIODE	1	B0HCMM000009
D6512-14	MA111	DIODE	3	MA2J111
D6521	D1FL40F4063	DIODE	1	B0ECHP000001
D6522	MA111	DIODE	1	MA2J111
D6523	D1FL40F4063	DIODE	1	B0ECHP000001
D6524	MA8051L	ZENER DIODE	1	MAZ80510LL
D6525	MA111	DIODE	1	MA2J111
D6526	M1FL20UF4063	DIODE	1	B0HCMM000009
D6527	MA111	DIODE	1	MA2J111
D6531	MA8051L	ZENER DIODE	1	MAZ80510LL
D6541	B0HCKS000001	DIODE	1	
D6542	MA111	DIODE	1	MA2J111
D6543	MA8051L	ZENER DIODE	1	MAZ80510LL
D6544	MA111	DIODE	1	MA2J111
D6545	MA8051L	ZENER DIODE	1	MAZ80510LL
D6546-48	MA8330M	ZENER DIODE	3	MAZ83300M
D6549,50	MA111	DIODE	2	MA2J111

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6551,52	MA8051L	ZENER DIODE	2	MAZ80510LL
D6553	MA111	DIODE	1	MA2J111
D6570	M1FL20UF4063	DIODE	1	B0HCMM000009
D6572	D1FL40F4063	DIODE	1	B0ECHP000001
D6582	MA8051L	ZENER DIODE	1	MAZ80510LL
D6583	LNJ201LPQJA	LED	1	
D6584	MA111	DIODE	1	MA2J111
D6585,86	MA8330M	ZENER DIODE	2	MAZ83300M
D6611	M1FS4	DIODE	1	B0JCME000025
D6615	D1FL40F4063	DIODE	1	B0ECHP000001
D6620-22	SF20LC30F10	DIODE	3	
D6624	SF20LC30F10	DIODE	1	
D6629	B0HBSM000031	DIODE	1	
D6635	MA8051L	ZENER DIODE	1	MAZ80510LL
D6636	MA111	DIODE	1	MA2J111
D6637	D1FL40F4063	DIODE	1	B0ECHP000001
D6640	D1FL40F4063	DIODE	1	B0ECHP000001
D6641,42	M1FS4	DIODE	2	B0JCME000025
D6645-47	D1FL40F4063	DIODE	3	B0ECHP000001
D6711	M1FS4	DIODE	1	B0JCME000025
D6711	D1FL40F4063	DIODE	1	B0ECHP000001
D6715 D6720-22	SF20LC30F10	DIODE	3	BUECHFUUUUUT
D6720-22 D6724	SF20LC30F10		1	
	+	DIODE		
D6729	B0HBSM000031	DIODE	1	MA70054011
D6735	MA8051L	ZENER DIODE	1	MAZ80510LL
D6736	MA111	DIODE	1	MA2J111
D6737	D1FL40F4063	DIODE	1	B0ECHP000001
D6740,41	D1FL40F4063	DIODE	2	B0ECHP000001
D6750,51	D1FL40F4063	DIODE	2	B0ECHP000001
D6752,53	M1FS4	DIODE	2	B0JCME000025
D6754	D1FL40F4063	DIODE	1	B0ECHP000001
D6755	M1FS4	DIODE	1	B0JCME000025
D6757	D1FL40F4063	DIODE	1	B0ECHP000001
D6760	MA111	DIODE	1	MA2J111
D6761	MA8051L	ZENER DIODE	1	MAZ80510LL
D6763	MA8051L	ZENER DIODE	1	MAZ80510LL
D6764	MA111	DIODE	1	MA2J111
D6765	LNJ201LPQJA	LED	1	
D6766,67	MA8330M	ZENER DIODE	2	MAZ83300M
D6768	MA111	DIODE	1	MA2J111
D6769	LNJ201LPQJA	LED	1	
D6770	MA111	DIODE	1	MA2J111
D8001,02	MA111	DIODE	2	MA2J111
D9000	MA3036H	ZENER DIODE	1	MAZ30360H
D9001-09	MA3062M	ZENER DIODE	9	MAZ30620M
D9351	MA152K	DIODE	1	MA3X152K
D9352,53	MA3062M	ZENER DIODE	2	MAZ30620M
D9356	MA111	DIODE	1	MA2J111
D9550	B0JCPD000010	DIODE	1	
D9551	MA113	DIODE	1	MA2J113
D9552	M1FS4	DIODE	1	
D9553	MA152K	DIODE	1	MA3X152K
D9554	MA111	DIODE	1	MA2J111
D9902	MA152K	DIODE	1	MA3X152K

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F1	TJS3A9630	CONNECTOR	1	K1KA03A00183
F9	TJS3A9630	CONNECTOR	1	K1KA03A00183
F900-1,-2	EYF-52BC	FUSE HOLDER		KTKAUSAUUTUS
F901-1,-2	EYF-52BC	FUSE HOLDER		
1 301-1,-2	L11-32BC	I GOL HOLDER		
H1	K1KB50B00030	50P CONNECTOR	1	
H2	K1KB40B00015	40P CONNECTOR	1	
H37	TJS3A9640	3P CONNECTOR	1	K1KA03A00171
HX1	K1KB40B00015	40P CONNECTOR	1	
IC081	B3L000000020	IC	1	
IC410	MIP0210SY1TV	IC (LOGIC)	1	
IC411	AN7705F	LINEAR IC	1	
IC430	C0DABZG00001	IC	1	
IC465	AN1431T	LINEAR IC	1	
C501	AN8026	LINEAR IC	1	
IC501	C5HABZZ00080	IC	1	
C503	AN7718F	LINEAR IC	1	
C504,05	AN1431T	LINEAR IC		
IC504,05	C0DAAHG00007	IC	1	
C507	PQ30RV21A	LINEAR IC	1	C0DAEZH00008
C508	AN6912	LINEAR IC	1	
C2301,02	TDA7480	LINEAR IC	2	C1AA0000561
C2304	PQ09SZ1T	IC	1	C0CBAHG00005
IC2401	BH3865S	LINEAR IC	1	C1BA00000302
C3001	C1AB00001139	IC	1	0.12/10000002
C3002,03	MC14052BF	MOS IC (CMOS GATE ARRLY)	2	C0JBAR000021
C3004	CXA1315M	LINEAR IC	1	C1AB00000440
C3006	PQ09SZ1T	IC	1	C0CBAHG00005
C3007,08	PQ12SZ1T	IC	2	C0CBAKG00003
C3009	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	C0JBAS000109
IC3301	TC4W53F	MOS IC (CMOS S/LOGIC)	1	C0JBAR000224
C3302	C0ABGB000001	IC	1	0000741000224
C3303	TC4W53F	MOS IC (CMOS S/LOGIC)	1	C0JBAR000224
C3501	JLC1562BF	MOS IC (MICON LSI)	1	C0JBAZ001265
C3502	TVRJ598-1	ROM IC	1	0000072001200
IC3502	C0ZBZ0000205	IC IC	1	
C3699	TVRJ642-2	ROM IC	1	(HZ)
C3699	TVRJ784-2	ROM IC	1	(HY)
C3891	MM1065ZMR	LINEAR IC	1	C0CBABB00029
C3802	C0EBE0000066	IC IC	1	332,1220023
C3803	TVSA0500	IC	1	C3ABMG000074
C3804	C1AB00001494	IC	1	
C3805,06	MM1065ZMR	LINEAR IC		C0CBABB00029
C3809	TC74LCX244F	MOS IC (CMOS S/LOGIC)	1	C0JBAZ001234
C4551	C0JBAE000228	IC	1	2002. 2001204
C6401-08	C0HBC0000005	IC	8	+
C6451	AN1431M	LINEAR IC	1	
C6452,53	AN78L15M	LINEAR IC	2	+
IC6452,55	AN78L05M	LINEAR IC	1	+
C6454 C6471	AN1431M	LINEAR IC	1	+
IC6491	AN1431M	LINEAR IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC6501,02	TC74HC14AF	IC	2	C0JBAB000155
IC6511	C0ZBZ0000561	IC	1	
IC6521	C0ZBZ0000561	IC	1	
IC6541,42	C0ZBZ0000561	IC	2	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6601-03	C0ZBZ0000138	IC	3	
IC6604	AN1431M	LINEAR IC	1	
IC6605,06	TC74HC244AF	IC IC	2	
IC6701-03	C0ZBZ0000138	IC	3	
	C0ZBZ0000130	IC	1	
IC6704			_	C0DDD 4000040
IC6705	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6706	TC74HC244AF	IC	1	
IC6711	AN1431M	LINEAR IC	1	
IC7101	C0JBAZ000005	IC	1	
IC7103	C0DBEZG00004	IC	1	
IC7201	C0JBAZ000005	IC	1	
IC8001	M52346SP	LINEAR IC	1	C1AA00000395
C8002	TC74HC14AF	IC	1	C0JBAB000155
C9000	PQ09SZ1T	IC	1	C0CBAHG00005
C9001	C0CBCBD00005	IC	1	
C9002-04	C0ABHA000033	IC	3	
C9006	C0CBCBD00005	IC	1	
IC9007	C0FBAD000069	IC	1	
C9200	MN84504	MOSIC	1	
C9203	C0CBCBD00005	IC	1	
C9206	C0JBAZ000855	IC	1	
C9210	C3ABPJ000017	IC	1	
C9212	TLC2933IPWL	INTEGRATED CIRCUIT	1	C0ABFA000012
C9213	C0CBCBD00005	IC IC	1	GOADI AGGOTE
C9300	C0ZBZ0000551	IC	1	
IC9301	COCBCBD00005	IC	1	
IC9351	MN102L230	IC	1	
IC9353	HM538123BJ8Z	IC	1	C3HAHC000006
IC9354	TVRJ799-1	ROM IC	1	
C9355	TVRJ858	IC	1	
IC9356	C0JBAZ001201	IC	1	
C9357	C1DB00000274	IC	1	
C9450S	TJSB01108	IC SOCKET	1	
C9450	TVRJ709-1	ROM IC	1	
IC9451	C1ZBZ0001996	IC	1	
C9452	TC74HCU04AF	MOS IC (CMOS S/LOGIC)	1	C0JBAB000159
IC9453	C0EBE0000066	IC	1	
IC9455	C0CBCAD00007	IC	1	
C9550	C0DBAZH00008	IC	1	
IC9551	C0DBAMH00006	IC	1	
C9552	C0DBEZG00004	IC	1	
IC9553	C0JBAZ001604	IC	1	
C9554	JLC1562BF	MOS IC (MICON LSI) *	1	C0JBAZ001265
IC9601	MN84505	MOS IC	1	500.200
		IC IC	_	
COEO2	C3ABPJ000043	ROM IC	1	
			1	1
IC9602 IC9603	TVRJ741-1		_	
	TVRJ741-1 C0ZBZ0000423 C0JBAZ000855	IC IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9700	TVRJ742-2	ROM IC	1	
IC9701	C1ZBZ0001996	IC	1	
IC9702	PST9128NR	IC (LOGIC)	1	C0EBE0000066
IC9703	C0CBCAD00007	IC	1	
IC9704	C0ZBZ0000423	IC	1	
IC9710-12	C0JBAZ001604	IC	3	
IC9801	C0JBAZ001604	IC	1	
IC9802,03	C0JBAZ000005	IC	2	
IC9805-22	TC74LCX574F	MOS IC (CMOS S/LOGIC)	18	C0JBAF000218
IC9900	C2BBFE000121	IC	1	
C9902	M51957BFP	LINEAR IC	1	C0EBB0000024
IC9904	C0JBAE000283	IC	1	
			-	
JK3300	K2HA204B0097	JACK	1	(HY)
JK3301	K1CB106B0027	CONNECTOR	1	(,
	+			(UV)
JK3302	K10BB2AB0005	CONNECTOR	1	(HY)
JK3303	K2HA204B0097	JACK	1	(HY)
JK3304	K10BB5AB0003	CONNECTOR	1	(HY)
JK3305	K2HA306B0048	JACK	1	(HZ)
JK3306	K2HA306B0049	JACK	1	(HZ)
JK3307	K2HA204B0097	JACK	1	(HZ)
JK3308	K2HA204B0096	JACK	1	(HZ)
JK3509	K1FB109B0058	CONNECTOR	1	
JK3511	TJS8A9880	CONNECTOR	1	K1FB115B0034
JK3513	K2HC103B0105	JACK	1	
JK8500	K4BC02B00013	TERMINAL	1	
JS1,S2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS3	ERDS2TC0	C 0 OHM, 1/4W	1	
JS3	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4	ERDS2TC0	C 0 OHM, 1/4W	1	
JS4	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5	ERDS2TC0	C 0 OHM, 1/4W	1	
JS5	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6	ERDS2TC0	C 0 OHM, 1/4W	1	
JS10	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS11	ERDS2TC0	C 0 OHM, 1/4W	1	
JS11	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS12	ERDS2TC0	C 0 OHM, 1/4W	1	
JS24	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS28-32	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS35	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2301	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
JS8019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L411	ELEXT100KA	PEAKING COIL	1	
L430	G4D4A0000048	SWITCHING TRANSFORMER	1	
L501	EXCELSA39	BEAD CHOKE	1	
L502-07	ERDS2TC0	C 0 OHM, 1/4W	6	
L508	EXCELSA39	BEAD CHOKE	1	
L509	TALFP15B221K	INDUCTION COIL	1	
L510,11	ERDS2TC0	C 0 OHM, 1/4W	2	
L515-18	ERDS2TC0	C 0 OHM, 1/4W	4	
L520	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L901	G0A143K00001	LINE CHOKE COIL	1	Δ
L902,03	TLPD048	LINE FILTER	2	⚠
L2301,02	G0ZZ00002023	COIL	2	
L2303,04	EXCELDR35C	BEAD CHOKE	2	
_2306	ELJPA100KB	CHIP INDUCTOR	1	
L3001-03	ELJPA100KB	CHIP INDUCTOR	3	
_3007.08	ELJPA100KB	CHIP INDUCTOR	2	
_3301	TLK20LFA223M	EMI FILTER	1	J0HABB000003
_3302,03	TLK20LFA224M	EMI FILTER	2	J0HABB000004
_3304,05	TLK20LFA223M	EMI FILTER	2	J0HABB000003
_3306,07	ELJPA100KB	CHIP INDUCTOR	2	
_3351,52	TLK20LFA223M	EMI FILTER	2	J0HABB000003
_3353-55	TLK20LFA224M	EMI FILTER	3	J0HABB000004
_3356,57	TLK20LFA223M	EMI FILTER	2	J0HABB000003
_3358,59	ELJPA100KB	CHIP INDUCTOR	2	
_3501	ELJPA100KB	CHIP INDUCTOR	1	
_3507-09	TLK20LFA224M	EMI FILTER	3	J0HABB000004
_3510-13	TLK212T256AL	EMI FILTER	4	J0HAAB000012
_3525,26	ELJPA100KB	CHIP INDUCTOR	2	2317 0 1200012
_3530	ELJPA100KB	CHIP INDUCTOR	1	
_3555	ELJPA100KB	CHIP INDUCTOR	1	
_3801.02	TLK20LFA224M	EMI FILTER	2	J0HABB000004
_3803	G1C100KA0008	INDUCTOR COIL	1	OOI IABBOOOO4
_3804	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
_3806	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
_3807	TALC168T2R2K	CHIP INDUCTOR COIL	1	G1C2R2K00006
L3808	G1C100KA0008	INDUCTOR COIL	1	GICZKZKOOOO
_3809	TALC325T4R7M	CHIP INDUCTOR COIL	1	
L3810,11	G1C100KA0008	INDUCTOR COIL	2	
_3813	TALC168T4R7K	CHIP INDUCTOR COIL	1	G1C4R7K00013
			3	G1C4R7R00013
L3814-16	G1C100KA0008	INDUCTOR COIL	1	IOUADDO0004
L3817-19	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3820,21	TLK20LFA223M	EMI FILTER	2	J0HABB000003
_3822-25	ELKE103FA	NOISE FILTER	4	IOLIA DE COCCO
_3826,27	TLK20LFA224M	EMI FILTER	2	J0HABB000004
_3828,29	TLK20LFA223M	EMI FILTER	2	J0HABB000003
_3830	ELJPA100KB	CHIP INDUCTOR	1	
_4551	ELJPA100KB	CHIP INDUCTOR	1	
_6451,52	J0JJC0000021	CHIP INDUCTOR	2	
_6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	TSKA158	BEAD CORE	1	G0ZZ00001935
_6602	TSKA158	BEAD CORE	1	G0ZZ00001935
_6604,05	TSKA158	BEAD CORE	2	G0ZZ00001935
_6611,12	ELC16BR82L	CHOKE COIL	2	
_6615,16	ELC16BR82L	CHOKE COIL	2	
L6618	J0JJC0000021	CHIP INDUCTOR	1	
_6620-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6626,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6636,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6644,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6647,48	J0JJC0000021	CHIP INDUCTOR	2	
L6702-04	TSKA158	BEAD CORE	3	G0ZZ00001935
L6705	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6711	ELC16BR82L	CHOKE COIL	1	
L6713,14	ELC16BR82L	CHOKE COIL	2	
L6716	ELC16BR82L	CHOKE COIL	1	
L6718	J0JJC0000021	CHIP INDUCTOR	1	
L6720-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6726,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6736,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6744,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6747	J0JJC0000021	CHIP INDUCTOR	1	
L6750	TSKA158	BEAD CORE	1	G0ZZ00001935
L7101-03	J0JJC0000021	CHIP INDUCTOR	3	30220001000
L7105	J0JJC0000021	CHIP INDUCTOR	1	
L7201-05	J0JJC0000021	CHIP INDUCTOR	5	
			2	
L8501,02	ELJPA100KB	CHIP INDUCTOR		COASDELLOSOS
L8501,02	TLPD061	LINE FILTER	2	G0A2R5H00003
L9001-04	ELKE103FA	NOISE FILTER	4	
L9005-10	EXCCL3225U1	EMI FILTER	6	
L9200,01	EXCCL3225U1	EMI FILTER	2	
L9300	EXCCL3225U1	EMI FILTER	1	
L9350	ELJPA100KB	CHIP INDUCTOR	1	
L9450	EXCCL3225U1	EMI FILTER	1	
L9451	ELJPA150KF	CHIP INDUCTOR	1	
L9551	G1C220M00029	INDUCTOR COIL	1	
L9552	G1C470M00012	INDUCTOR COIL	1	
L9553	EXCCL3225U1	EMI FILTER	1	
L9601	ELJFA1R0KF	CHIP COIL	1	
L9701	EXCCL3225U1	EMI FILTER	1	
L9801	EXCCL3225U1	EMI FILTER	1	
L9803	EXCCL3225U1	EMI FILTER	1	
L9805-08	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
LC9000-02	J0E3505B0002	LCR FILTER	3	
LC9003	ELKE103FA	NOISE FILTER	1	
LC9006	ELKE103FA	NOISE FILTER	1	
LC9300-02	ELKE103FA	NOISE FILTER	3	
LC9501-05	ELKE103FA	NOISE FILTER	5	
LC9507,08	ELKE103FA	NOISE FILTER	2	
LC9801-03	ELKE103FA	NOISE FILTER	3	
LC9901	ELKE103FA	NOISE FILTER	1	
P1	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
P2	TJS3A9670	CONNECTOR	1	K1KA06A00179
P6	K1KA07A00056	7P CONNECTOR	1	
P9	K1KA02A00244	2P CONNECTOR	1	
P10	TJS1A8810	5P CONNECTOR	1	K1KA05A00177
P12	K1KA05A00139	5P CONNECTOR	1	
P23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
P25	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
P27	TJS1A8850	9P CONNECTOR	1	K1KA09A00099
		. John Loron	<u> </u>	
Q082	2SD601A	TRANSISTOR	1	2SD0601A
Q401-03	2SC3311A	TRANSISTOR	3	2SC3311AW
	+	+	_	
Q410	2SC3311A	TRANSISTOR	1	2SC3311AW

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q433	2SD2177R	TRANSISTOR	1	
Q434	2SB1434R	TRANSISTOR	1	2SB14340RA
Q435	2SC3311A	TRANSISTOR	1	2SC3311AW
Q436	2SA1309A	TRANSISTOR	1	2SA13090WA
Q437-39	2SC3311A	TRANSISTOR	3	2SC3311AW
Q501	2SK2847	FET	1	B1DEFU000002
Q502	B1DEGQ000019	FET	1	
Q503	2SB621A	TRANSISTOR	1	2SB0621AW
Q504	2SC3311A	TRANSISTOR	1	2SC3311AW
Q505	2SA1309A	TRANSISTOR	1	2SA13090WA
Q506	2SC3311A	TRANSISTOR	1	2SC3311AW
Q2301-03	2SD601A	TRANSISTOR	3	2SD0601A
Q2305,06	2SD601A	TRANSISTOR	2	2SD0601A
Q2406	2SD601A	TRANSISTOR	1	2SD0601A
			1	
Q2408	2SD601A	TRANSISTOR		2SD0601A
Q2410	2SD601A	TRANSISTOR	1	2SD0601A
Q3013,14	2SD601A	TRANSISTOR	2	2SD0601A
Q3085,86	2SB709A	TRANSISTOR	2	2SB0709A
Q3301-09	2SD601A	TRANSISTOR	9	2SD0601A
Q3351,52	2SD601A	TRANSISTOR	2	2SD0601A
Q3353	2SB709A	TRANSISTOR	1	2SB0709A
Q3354-58	2SD601A	TRANSISTOR	5	2SD0601A
Q3359	2SB709A	TRANSISTOR	1	2SB0709A
Q3501-03	2SD601A	TRANSISTOR	3	2SD0601A
Q3507	2SB709A	TRANSISTOR	1	2SB0709A (HY) (HZ)
Q3507	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3508	2SB709A	TRANSISTOR	1	2SB0709A (HY) (HZ)
Q3508	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3509	2SB709A	TRANSISTOR	1	2SB0709A (HY) (HZ)
Q3509	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3513	2SD601A	TRANSISTOR	1	2SD0601A
Q3514	2SB709A	TRANSISTOR	1	2SB0709A
Q3515	2SD601A	TRANSISTOR	1	2SD0601A
Q3516	2SB709A	TRANSISTOR	1	2SB0709A
Q3531,32	2SD601A	TRANSISTOR	2	2SD0601A
Q3801,02	2SB709A	TRANSISTOR	2	2SB0709A
			2	
Q3803,04 Q3805-07	2SD601A 2SB709A	TRANSISTOR	1	2SD0601A
		TRANSISTOR	3	2SB0709A
Q3808	2SD601A	TRANSISTOR	1	2SD0601A
Q3809	2SK198R	FET	1	2SK01980R
Q3810	2SD601A	TRANSISTOR	1	2SD0601A
Q3812,13	2SB709A	TRANSISTOR	2	2SB0709A
Q3815	2SB709A	TRANSISTOR	1	2SB0709A
Q3817	2SB709A	TRANSISTOR	1	2SB0709A
Q6401	2SK620	FET	1	2SK0620
Q6451	B1BBCJ000003	TRANSISTOR	1	
Q6452	2SB709A	TRANSISTOR	1	2SB0709A
Q6453	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6454	2SD814A	TRANSISTOR	1	
Q6471	B1BBCJ000003	TRANSISTOR	1	
Q6472	2SB709A	TRANSISTOR	1	2SB0709A
Q6474	2SD814A	TRANSISTOR	1	
Q6476,77	2SD601A	TRANSISTOR	2	2SD0601A
Q6491,92	2SC1473A	TRANSISTOR	2	2SC1473AE

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6511,12	B1DFGL000005	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	2SD0601A
Q6521	FS7VS14AT11	FET	1	
Q6522-27	2SK2993	FET	6	
Q6530	2SB1073001TV	TRANSISTOR	1	
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542-47	B1DFHM000002	DIODE	6	
Q6550	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6551	2SD601A	TRANSISTOR	1	2SD0601A
Q6552	FS7VS14AT11	FET	1	
Q6553	2SB1073001TV	TRANSISTOR	1	
Q6555	FS7VS14AT11	FET	1	
Q6581	2SD601A	TRANSISTOR	1	2SD0601A
Q6601	2SK3652000VH	TRANSISTOR	1	
Q6605	2SK3652000VH	TRANSISTOR	1	
Q6621	2SK3637000VE	TRANSISTOR	1	
Q6624	2SK3637000VE	TRANSISTOR	1	
Q6641,42	B1DFHM000002	DIODE	2	
Q6671	2SB940A	TRANSISTOR	1	2SB0940AJ
Q6672	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6673	2SD1263A	TRANSISTOR	1	20017/3AL
	2SK3652000VH		1	
Q6701 Q6705		TRANSISTOR		
Q6705	2SK3652000VH	TRANSISTOR	1	
Q6721	2SK3637000VE	TRANSISTOR	1	
Q6724	2SK3637000VE	TRANSISTOR	1	
Q6741,42	B1DFHM000002	DIODE	2	
Q6745,46	2SK326800L	FET	2	
Q6751	2SD1264	TRANSISTOR	1	2SD12640J
Q6752,53	2SC1473	TRANSISTOR	2	2SC14730E
Q6755,56	2SD601A	TRANSISTOR	2	2SD0601A
Q7201,02	2SB709A	TRANSISTOR	2	2SB0709A
Q8021	2SD601A	TRANSISTOR	1	2SD0601A
Q9350	2SK620	FET	1	2SK0620
Q9500,02	2SD601A	TRANSISTOR	2	2SD0601A
Q9501	2SK620	FET	1	2SK0620
Q9502	2SD601A	TRANSISTOR	1	2SD0601A (D2)
Q9502	2SK620	FET	1	2SK0620 (D1)
Q9504	2SK620	FET	1	2SK0620
Q9701-03	2SD601A	TRANSISTOR	3	2SD0601A
Q9904	2SD601A	TRANSISTOR	1	2SD0601A
R081	TAJAAH0470JV	M 47 OHM,J,1/16W	1	D0GB470JA006
R082	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
R083	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R084	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R088	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R091,92	TAJAAH0470JV	M 47 OHM,J,1/16W	2	D0GB470JA006
R093,94	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R401,02	ERF10TK3R3	W 3.3 OHM, 10W	2	
R403	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R404	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R405	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R406	ERDS2TJ683	C 68KOHM, J,1/4W	1	
R407	ERDS2TJ473	C 47KOHM, J,1/4W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R408	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R409	ERU5TAJ150	F 15 OHM, 5W	1	Δ
R411	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R412	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R413	ERG1FJS104D	M 100KOHM, J, 1W	1	
R414	ERDS2TJ561	C 560 OHM, J,1/4W	1	
R415	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R416	ERDS1TJ221	C 220 OHM, J,1/2W	1	
R417	ERDS1TJ391	C 390 OHM, J,1/2W	1	
R418,19	ERDS2TJ104	C 100KOHM, J,1/4W	2	
R420	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R422-24	ERDS2TJ103	C 10KOHM, J,1/4W	3	
R431	ERDS2TJ272	C 2.7KOHM, J,1/4W	1	
R432	ERDS1FJ224	C 220KOHM, J,1/2W	1	
R433	ERDS1FJ274	C 270KOHM, J,1/2W	1	
R434,35	ERG3FJS333D	M 33KOHM, J, 3W	2	
R436,37	ERF5EKR15	W0.15 OHM, 5W	2	
R438	ERDS2TJ270	C 27 OHM, J,1/4W	1	
R439	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R440	ER0S2CKF5602	M 56KOHM, F,1/4W	1	EROS2CKF5602
R441	ERG1FJS100D	M 10 OHM, J, 1W	1	
R442	ERDS1FJ100	C 10 OHM, J,1/2W	1	
R443	ERDS1FJ103	C 10KOHM, J,1/2W	1	
R444	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R445	ERDS2TJ684	C 680KOHM, J,1/4W	1	
R446	ERDS1FJ100	C 10 OHM, J,1/2W	1	
R447	ERDS1FJ103	C 10KOHM, J,1/2W	1	
R448	ERDS2TJ333	C 33KOHM, J,1/4W	1	
R449	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R450,51	ERDS2TC0	C 0 OHM, 1/4W	2	
R452	ER0S2CKF2701	M 2.7KOHM, F,1/4W	1	
R454-56	ER0S2CKF2203	M 220KOHM, F,1/4W	3	
R457	ER0S2CKF6800	M 680OHM, F,1/4W	1	
R458	ER0S2CKF1801	M 1.8KOHM, F,1/4W	1	
R459-61	ER0S2CKF2203	M 220KOHM, F,1/4W	3	
R462	ERG1FJS393D	M 39KOHM, J, 3W	1	
R463	ERG1FJS473D	M 47KOHM, J, 3W	1	
R464	ERG2FJS823D	M 82KOHM, J, 3W	1	
R465	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R466	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R467	ERDS2TJ153	C 15KOHM, J,1/4W	1	
R468,69	ERDS2TJ223	C 22KOHM, J,1/4W	2	
R470	ERDS2TJ272	C 2.7KOHM, J,1/4W	1	
R471	ERDS2TJ272	C 100 OHM, J,1/4W	1	
R471	ERDS1FJ2R7	C 2.7 OHM, J,1/2W	1	
			1 1	1
R473		, ,	1	
R473 R474	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R474	ERDS2TJ101 ERDS2TJ473	C 100 OHM, J,1/4W C 47KOHM, J,1/4W	1	
R474 R475	ERDS2TJ101 ERDS2TJ473 ERDS2TJ560	C 100 OHM, J,1/4W C 47KOHM, J,1/4W C 56 OHM, J,1/4W	1	
R474 R475 R476	ERDS2TJ101 ERDS2TJ473 ERDS2TJ560 ERDS2TJ472	C 100 OHM, J,1/4W C 47KOHM, J,1/4W C 56 OHM, J,1/4W C 4.7KOHM, J,1/4W	1 1 1	
R474 R475 R476 R477,78	ERDS2TJ101 ERDS2TJ473 ERDS2TJ560 ERDS2TJ472 ERDS2TJ222	C 100 OHM, J,1/4W C 47KOHM, J,1/4W C 56 OHM, J,1/4W C 4.7KOHM, J,1/4W C 2.2KOHM, J,1/4W	1 1 1 2	
R474 R475 R476 R477,78 R479	ERDS2TJ101 ERDS2TJ473 ERDS2TJ560 ERDS2TJ472 ERDS2TJ222 ERG1FJS222D	C 100 OHM, J,1/4W C 47KOHM, J,1/4W C 56 OHM, J,1/4W C 4.7KOHM, J,1/4W C 2.2KOHM, J,1/4W M 2.2KOHM, J,1/4W	1 1 1 2 1	
R474 R475 R476 R477,78	ERDS2TJ101 ERDS2TJ473 ERDS2TJ560 ERDS2TJ472 ERDS2TJ222	C 100 OHM, J,1/4W C 47KOHM, J,1/4W C 56 OHM, J,1/4W C 4.7KOHM, J,1/4W C 2.2KOHM, J,1/4W	1 1 1 2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R506	ER0S2CKF1801	M 1.8KOHM, F,1/4W	1	
R507	ER0S2CKF4300	M 430OHM, F,1/4W	1	
R509	ERDS1FJ100	C 10 OHM, J,1/2W	1	
R510,11	ERX2FJSR47D	M 0.47OHM, J, 2W	2	
R512	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R513	ERDS2TJ332	C 3.3KOHM, J,1/4W	1	
R514	ERX2FJSR47D	M 0.470HM, J, 2W	1	
R515	ERDS1FJ681	C 680 OHM, J,1/2W	1	
R516	ERX2FJSR47D	M 0.470HM, J, 2W	1	
R518	ERX2FJSR47D	M 0.470HM, J, 2W	1	
R519	ERDS2TJ122	C 1.2KOHM, J,1/4W	1	
R520	ERG3FJS683D	M 68KOHM, J, 3W	1	
R522-24	ERG3FJS683D	M 68KOHM, J, 3W	3	
R525,26	ERDS1FJ220	C 22 OHM, J,1/2W	2	
R527	ERDS1FJ3R3	<u> </u>	1	
		C 3.3 OHM, J,1/2W		
R528,29	ERDS2TJ102	C 1KOHM, J,1/4W	2	
R530,31	ERDS2TJ222	C 2.2KOHM, J,1/4W	2	
R532,33	ERDS2TJ101	C 100 OHM, J,1/4W	2	
R534,35	ERDS2TJ473	C 47KOHM, J,1/4W	2	
R536	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R537	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R538	ER0S2CKF6192	M61.9KOHM, F,1/4W	1	
R539	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R540	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
R541,42	ER0S2CKF4992	M49.9KOHM, F,1/4W	2	EROS2CKF4992
R543	ER0S2CKF4642	M46.4KOHM, F,1/4W	1	
R545	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R546	ERDS1FJ220	C 22 OHM, J,1/2W	1	
R547	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R548	ERDS1FJ471	C 470 OHM, J,1/2W	1	
R549	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R550	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R551	ERDS2TJ151	C 150 OHM, J,1/4W	1	
R552,53	ERG2FJS471D	M 470 OHM, J, 2W	2	
R554	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R555	ER0S2CKF1212	M12.1KOHM, F,1/4W	1	
		C 3.3KOHM, J,1/4W	1	
R556	ERDS2TJ332			EDOCOCKESE4
R557	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R558	ER0S2CKF1501	M1.50KOHM, F,1/4W	1	EROS2CKF1501
R559	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R560	ER0S2CKF3741	M3.74KOHM, F,1/4W	1	
R561	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R562	ER0S2CKF3830	M 383 OHM, F,1/4W	1	
R563	ER0S2CKF1213	M 121KOHM, F,1/4W	1	
R564	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R565	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R566	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R567	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R568	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R569	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R570	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R571	ERDS2TJ273	C 27KOHM, J,1/4W	1	
R572	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R573,74	ER0S2CKF1803	M 180KOHM, F,1/4W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R575	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R576	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R577	ERDS2TJ470	C 47 OHM, J,1/4W	1	
R578	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R579	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R580	ERDS2TJ471	C 470 OHM, J,1/4W	1	
R581	ERDS2TJ123	C 12KOHM, J,1/4W	1	
R582	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R583	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R584	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R585	ERG3FJS683D	M 68KOHM, J, 3W	1	
R586,87	ERDS1FJ224	C 220KOHM, J,1/2W	2	
R900,01	ERC12ZGK105	S 1MOHM, K,1/2W	2	Δ
R1554,55	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2301	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2304	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2305,06	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R2309	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2310	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2319,20	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2319,20 R2321	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2321,23	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2322,23 R2324,25	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2324,25 R2326	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2327	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R2328	ERJ6GEYJ683	M 68KOHM,J,1/10W	1	
	ERJ6GEYJ332		2	
R2329,30 R2331	ERJ6GEY0R00	M 3.3KOHM,J,1/10W	1	
R2332	ERJ6GEYJ182	M 0 OHM,J,1/10W	1	
R2332		M 1.8KOHM,J,1/10W	1	
R2334	ERJ6GEYJ471 ERJ6GEYJ472	M 470 OHM,J,1/10W	1	
		M 4.7KOHM,J,1/10W	+	
R2335,36	ERJ6GEYJ123	M 12KOHM,J,1/10W	2	
R2337,38	ERJ6GEY0R00	M 0 OHM,J,1/10W	2	
R2341	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2343	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2346	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2347	ERJ6GEYJ473	M 47KOHM, J,1/10W	1	
R2348	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2349,50	ERJ6GEY0R00	M 0 OHM,J,1/10W	2	
R2408	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2410	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2431	ERJ6GEYJ123	M 12KOHM, J,1/10W	1	
R2434	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2438	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2439	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2440	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2441	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2445	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R2448	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2450	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2452	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2453	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2456	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	I

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2460	ERJ6ENF1802	M 18KOHM, 1/10W	1	
R2461,62	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R2463	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R2464	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2466	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2467	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2469	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2470	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2471	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2472	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2473	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2476,77	ERJ6GEYJ220	M 22 OHM,J,1/10W	2	
R2480	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2481,82	ERJ6GEYJ153	M 15KOHM,J,1/10W	2	
R2483	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2484	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3001-04	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R3007	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R3009-15	ERJ3GEYJ560	M 56 OHM,J,1/16W	7	
R3016-21	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3022,23	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3024-29	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3030,31	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3032,33	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R3034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3036	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	200210107000
R3037	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3038	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3039-43	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R3045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	DOGBIOTOAGOO
R3046	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3047	ERJ3GEYJ103		1	
		M 10KOHM, J,1/16W	1	
R3078 R3079	ERJ3GEYJ153 ERJ3GEYJ333	M 15KOHM,J,1/16W M 33KOHM.J.1/16W	1	
		,,,,,,,	+ -	
R3087,88	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	D0CD22414002
R3101-08	ERJ3GEYJ334	M 330KOHM,J,1/16W	8	D0GB334JA002
R3109	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3301	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(IDA)
R3302	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(HY)
R3303	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3304,05	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3306	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
R3307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3308	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
R3309	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3310	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3311	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3312	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R3313	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3314	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R3315	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3316-18	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3319-21	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R3322	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3323	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3324	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3325-27	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3328-31	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3332,33	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3334	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3335	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3336	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3337	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3338,39	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R3340	ERJ6ENF9310	M 931 OHM, 1/10W	1	
R3341	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3342	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3343	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3344	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3345	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3346-48	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3349,50	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3351,52	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3353-55	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3356,57	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3358-61	TAJAAH0101JV	M 100 OHM,J,1/16W	4	D0GB101JA006
R3362,63	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3364	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3365	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	200210101000
R3366,67	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3368	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3369-72	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	DOODTOTOAGGO
R3373,74	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3375-77	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3378,79	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	DOGBTOTJACCO
R3380-82	ERJ3GEYJ102		3	
		M 1KOHM,J,1/16W		DOCDANA IANNO
R3383-85 R3386.87	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
,-	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	D0GR104 IA006
R3388	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3389,90	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3391	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	DOCEMAN IACOS
R3392	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3393,94	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	DOCBARA LACOS
R3395	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3396	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3400	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3501-03	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3504	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R3505	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3506	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3507	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3508	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	(HY) (HZ)
R3508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3509	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	(HY) (HZ)
R3509	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3510,02	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3511	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3513,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3516,17	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3518-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R3526-28	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3529,30	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3532-34	ERJ6GEY0R00	M 0 OHM,J,1/10W	3	
R3535,36	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
R3537	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	(HX)
R3537	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	(HY) (HZ)
R3538	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(HY) (HZ)
R3538	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	(HX)
R3539,40	ERJ6ENF75R0	M 75 OHM, 1/10W	2	(HY) (HZ)
R3540	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	(HX)
R3541	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3547	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3548	ERJ6ENF7500	M 750 OHM, 1/10W	1	(HY) (HZ)
R3548	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	(HX)
R3549,50	ERJ6ENF1001	M 1KOHM, 1/10W	2	<u> </u>
R3577	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3578	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3579	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3580	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3581	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3582	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3585,86	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3589	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3590	ERJ6GEYJ560	M 56 OHM,J,1/10W	1	
R3595-97	ERJ6GEYJ102	M 1KOHM,J,1/10W	3	
R3599	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3603,04	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3611-14	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	4	
R3626-29	ERJ6GEYJ3R3	M 3.3KOHM,J,1/10W	4	
R3653	ERJ6GEYJ153	, ,	1	
		M 15KOHM, J,1/10W		
R3654	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3655	ERJ6GEYJ153	M 15KOHM, J,1/10W	1	
R3656	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3663,64	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3668	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3672	ERJ6GEYJ101	M 100 OHM, J,1/10W	1	
R3755,56	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3764-66	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R3776,77	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3778	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3801,02	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3803,04	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R3805	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3806	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3808	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3809	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3810	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3811	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3812	ERJ6ENF3300	M 330 OHM, 1/10W	1	
R3813	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3814	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R3815	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3816	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3817	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3818	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3819	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3820	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R3821	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R3822	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3823	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3824	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3825	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3826	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3827	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3828	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3829	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3830,31	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3832	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3833	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3834	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3835	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3836	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3837-40	EXB38V471J	RESISTOR ARRAY	4	
R3841	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3842	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3843	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3845	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3846	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	23021010000
R3848	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3849	ERJ6ENF3000	M 300 OHM, 1/10W	1	
R3850	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3851	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3852	ERJ6ENF4701	-	1	
		M 4.7KOHM, 1/10W	1	
R3853	ERJ3GEYJ561	M 560 OHM,J,1/16W		
R3854	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3855	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3856	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3857	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3858	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3859	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	DOCESON LAGOS
R3860	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	D0GB391JA002
R3861	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R3862	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3863,64	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R3865	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3866	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R3867-69	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3870	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R3871	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3872	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R3873	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3874	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3875,76	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	2	
R3877	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3879	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3881	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3884-86	TAJAAH0820JV	M 82 OHM,J,1/16W	3	D0GB820JA006
R3887	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3888	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3890	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R3891	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3892	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3893	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3894	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3895	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4521	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4551	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4552	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4601	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4604	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R6401-08	ERJ6GEYJ221	M 220 OHM,J,1/10W	8	
R6409	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6410,11	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6412	ERJ6GEYJ472		1	
R6413	ERJ6GEYJ224	M 4.7KOHM,J,1/10W	1	
R6420-23	ERJ6GEYJ103	M 220KOHM,J,1/10W	4	
		M 10KOHM,J,1/10W		
R6424	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6425-28	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6429	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6441	ERJ6ENF7502	M 75KOHM, 1/10W	1	
R6442	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6443	EVMEASA00B24	CONTROL 20KOHMB 0.3W	1	
R6444	ERJ6GEYJ272	M 2.7KOHM,J,1/10W	1	
R6445	ERJ6ENF2551	M2.55KOHM, 1/10W	1	
R6447	ERG2FJS223D	M 22KOHM, J, 2W	1	
R6448	ERG2FJS472D	M 82KOHM, J, 3W	1	
R6453	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6454	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6455	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6456	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R6457,58	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6459-61	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R6462	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R6463	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6464	ERG2FJS273D	M 27KOHM, J, 2W	1	
R6465	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6466	ERJ14YJ101	M 100 OHM, J,1/4W	1	
R6467,68	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6469	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6470	ERJ6GEYJ273	M 27KOHM,J,1/10W	1	
R6471	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6473	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6474	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6475	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6476	ERJ6GEYJ394	M 390KOHM,J,1/10W	1	
R6477	EVMEASA00B33	CONTROL 3KOHMB 0.3W	1	
R6478	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6479,80	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6482	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6483	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6484	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6485,86	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6489	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6491	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6492,93	ERJ6ENF2203	M 220KOHM, 1/10W	2	
R6494	ERJ12YJ102	M 1KOHM,J, 1/2W	1	
R6497	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6498,99	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6500-02	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6503,04	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6505-07	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6509	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6510	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6511	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6512	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6513	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6514	ERJ6GEYJ104		1	
		M 100KOHM,J,1/10W		
R6515	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6516	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	DOCEMAN LANGE
R6518	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6521	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6522	ERJ6GEY0R00	M 0 OHM,J,1/10W	1	
R6524	ERJ6GEYF222	M 2.2KOHM,F,1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6527,28	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6529	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6530-35	ERJ6GEYJ470	M 47 OHM,J,1/10W	6	
R6538	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6539	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6540	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6541	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6542-47	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	6	
R6550	ERG1FJS332D	M 3.3KOHM, J, 1W	1	
R6551-53	ERJ6ENF1003	M 100KOHM, 1/10W	3	
R6554	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6555	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6556	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R6558	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6560,61	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6563	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6565	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6566	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6567	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6568	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6570	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6571-78	ERJ6GEYJ471	M 470 OHM,J,1/10W	8	
R6582,83	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6584	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6586	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6587	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6589	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6591	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6592,93	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6594	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6595,96	ERJ6ENF5231	M5.23KOHM, 1/10W	2	
R6601	ERD25V0R00	M OHM, 1/10W	1	
R6605-07	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6611,12	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6619	ERJ6GEYJ240	M 24 OHM,J,1/10W	1	
R6627,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6630-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	
R6636-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6641,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6643,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R6647,48	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6655	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6656	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6661,62	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	233210134000
	TAJAAH0101JV		2	D0GB101JA006
R6667,68 R6669	ERJ3GEY0R00	M 100 OHM,J,1/16W	1	DUGDIUIJAUU0
		M 0 OHM, 1/16W		
R6670	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R6671	ERG3FJS821D	M 820 OHM, J, 3W	1	
R6672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6673	ERG1SJ100P	M 10 OHM, J, 1W	1	
R6678,79	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R6680,81	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6682-85	ERJ3GEYJ471	M 470 OHM,J,1/16W	4	
R6686-89	ERJ3GEYJ473	M 47KOHM,J,1/16W	4	
R6690,91	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R6692,93	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6694-96	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6697-99	ERJ3GEYJ473	M 47KOHM,J,1/16W	3	
R6701	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6702	ERD25V0R00	M OHM, 1/10W	1	
R6711,12	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6719	ERJ6GEYJ240	M 24 OHM,J,1/10W	1	
R6727,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6730-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	
R6736-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6741,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6743,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R6747,48	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6759,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6761	ERJ12YJ470	M 47 OHM, J,1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6762-64	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6765	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6766-68	ERJ6GEYJ223	M 22KOHM,J,1/10W	3	
R6769,70	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6771,72	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6773	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6774	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R6777,78	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6779,80	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6783	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6784	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6785,86	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6787,88	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6790	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6791	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6801-03	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6804-06	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6807-09	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6810-12	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6818.19	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6820	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6821	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6823	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6824	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6825	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6826	ERJ6GEYJ152		1	
R6827	ERJ6GEYJ101	M 1.5KOHM,J,1/10W	1	
		M 100 OHM,J,1/10W	-	
R7101-12	ERJ14YJ220	M 22 OHM, J,1/4W	12	
R7117	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7119	ERJ6ENF1651	M1.65KOHM, 1/10W	1	
R7120	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7126-28	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R7130-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7201-16	ERJ14YJ220	M 22 OHM, J,1/4W	16	
R7217	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7221-24	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R7225	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7226-33	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R8002	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R8003	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R8004	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8006,07	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R8008	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8009	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R8010	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8011	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R8012	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8013	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8015	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8017-19	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R8023,24	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R8023,24 R8025		M 4.7KOHM,J,1/16W M 18KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8027	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R8028-30	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	3	
R8033	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R8035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8036	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9000	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9008	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9010	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9018-20	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9035	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9036	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9037	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9038	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9039	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9040	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9040 R9041	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
		· ·	1	
R9045	ERJ3GEYJ102	M 1KOHM,J,1/16W		
R9046	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9047	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9048	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9049	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9050,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9052	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9053	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9058	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9059	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9060	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9061	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9063	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9064	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9065	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9068-70	ERJ6ENF2701	M 2.7KOHM, 1/10W	3	
R9071-73	ERJ6ENF1800	M 180 OHM, 1/10W	3	
R9076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9077	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9078	ERJ6ENF1800	M 180 OHM, 1/10W	1	
R9080,81	ERJ6ENF1800	M 180 OHM, 1/10W	2	
R9082	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9102,03	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9104	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9105,06	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9107-10	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9113	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9115	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	500510107000
	ERJ3GEY0R00		9	
R9121-29		M 0 OHM, 1/16W	+ -	
R9200,01	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9204,05	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9207,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9210	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9211,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9228	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9229	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9239,40	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9241	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9242,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9244	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9245	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9246	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9247,48	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9249	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9253	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9254	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9257	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9259	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9261	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9262,63	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R9264-70	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R9271	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9274	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9275	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9285	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9286,87	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9288,89	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R9290	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9291	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R9293	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9300	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9301-05	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R9306,07	ERJ3GEY0R00	M 0 OHM, 1/16W	2	500510107000
R9308	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9309	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9350	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9351	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9352,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9354	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9355,56	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9357	ERJ3GEYJ272		1	
R9358	TAJAAH0101JV	M 2.7KOHM,J,1/16W	1	D0CP101 IA006
		M 100 OHM,J,1/16W	+ -	D0GB101JA006
R9359	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9360,61	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9362-64	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R9365	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	D0CP101 IA006
R9366-68	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R9369	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9371	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9372-75	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	4	
R9376	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9377	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9378	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9379	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9380	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9381	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9382	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9383-86	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9387-90	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R9391	ERJ6ENF1002	M 10KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9392	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9394-00	ERJ3GEYJ102	M 1KOHM,J,1/16W	7	
R9401,02	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9403	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9404-06	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R9407,08	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9409	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9410	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9411	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9413	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9414	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9416	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9417	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9418	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9419	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9420	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9421	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9425	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9426	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9427	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9429	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9432	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9434,35	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9436-39	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9440,41	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9442-49	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R9454-58	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9459	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9460,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9464	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9466	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9467	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9469	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9470	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9472,73	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9475	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9478	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9501	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9502-07	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R9514-19	EXB38V680J	RESISTOR ARRAY	6	
R9520,21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9523	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9525,26	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9527-29	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9530-32	EXB38V680J	RESISTOR ARRAY	3	
R9533	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9535-43	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9548	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9549	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9551	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555-58	ERJ8RSJR10V	M 1 OHM, 1/8W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9559	ERJ6ENF1301	M 1.3KOHM, 1/10W	1	
R9560	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9561	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9562	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9563	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R9564	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9565	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R9566	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9567	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9568,69	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9572	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9573	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9576	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9577	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9578	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9581	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9582-85	ERJ3GEYJ330	M 33 OHM,J,1/16W	4	
R9588	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9601	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9607,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9609	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9616	ERJ3GEY0R00	M 0 OHM, 1/16W	1	200DIVIOA000
R9617,18	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9619,20	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9624,25	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9626	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9627	ERJ3GEYJ103	-	1	
		M 10KOHM,J,1/16W	1	
R9629	ERJ3GEYJ332	M 3.3KOHM,J,1/16W		
R9630	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9632-34	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R9635-39	ERJ3GEYJ100	M 10 OHM,J,1/16W	5	
R9642-45	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9652	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9654	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9656	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9701	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9702	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9703	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9704-07	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9709	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9710-12	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9714	EXB38V103J	RESISTOR ARRAY	1	
R9715-17	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9718,19	EXB38V103J	RESISTOR ARRAY	2	
R9720	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9722,23	EXB38V103J	RESISTOR ARRAY	2	
R9725	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9726	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9727	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9728	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9729	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9730	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9732	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9742	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9743	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9744,45	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9746	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9747,48	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9749	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9750	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R9755-57	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9758-62	ERJ3GEYJ151	M 150 OHM,J,1/16W	5	
R9765-71	ERJ3GEYJ151	M 150 OHM,J,1/16W	7	
R9775	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9793-00	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R9801,02	EXB38V103J	RESISTOR ARRAY	2	
R9803-05	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9806	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9809-11	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9813	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9814	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9816-18	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9819	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9821	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9823-28	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9831	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9832,33	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9836,37	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9838	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9839,40	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9841	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9842,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9844-46	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R9851-71	EXB38V470J	RESISTOR ARRAY	21	
R9872-76	TAJAAH0470JV	M 47 OHM,J,1/16W	5	D0GB470JA006
R9877	ERJ3GEY0R00	M 0 OHM, 1/16W	1	20024.007000
R9878	EXB38V151J	RESISTOR ARRAY	1	
R9879.80	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9881	EXB38V680J	RESISTOR ARRAY	1	
R9882	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9884-88	TAJAAH0470JV	M 47 OHM,J,1/16W	5	D0GB0303A000
R9890	ERJ3GEY0R00	M 0 OHM, 1/16W	1	203247 03A000
R9901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9902,03	ERJ3GEYJ102	M 1KOHM, 1/16W	2	
			1	
R9904	ERJ3GEYJ103	M 10KOHM, J,1/16W		
R9910	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	D0CB404 IA000
R9911	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9912	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	D00B404 14000
R9913,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9916	ERJ3GEY0R00	M 0 OHM, 1/16W	1	Doop.o.
R9917	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9920	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9921	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	D0GB101JA006

Def Ne	Don't No.	Deut Neues & Description	D	Dama autos
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9930 R9931,32	EXB38V103J TAJAAH0101JV	RESISTOR ARRAY	2	D0GB101JA006
R9931,32	ERJ3GEYJ103	M 100 OHM,J,1/16W M 10KOHM,J,1/16W	6	DOGBIOIJAOOO
R9939	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9940,41	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	DOGDIOIOAGGO
R9942	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9944	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9945,46	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9947	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9948	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9949	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9950	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9951,52	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9954,55	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9958	ERJ3GEYJ474	M 470KOHM,J,1/16W	1	
R9959	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R9960	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9961,62	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9965	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9966	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9967,68	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9977	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9978,79	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9980	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
RL401,02	TSEH0005	RELAY	2	K6B1AGA00042 🗥
RL403	TSE10801	RELAY	1	K6B2AGA00017 🗥
			1	
RM001	PNA4601M05TV	REMOCO RECEIVER	1	
RM001	PNA4601M05TV	REMOCO RECEIVER	1	
RM001	PNA4601M05TV TNPA2540	REMOCO RECEIVER  CIRCUIT BOARD C1	1	Δ
RTL	TNPA2540	CIRCUIT BOARD C1	1	Δ
RTL RTL	TNPA2540 TNPA2541	CIRCUIT BOARD C1 CIRCUIT BOARD C2	1 1	<u>A</u>
RTL RTL RTL	TNPA2540 TNPA2541 TNPA2583	CIRCUIT BOARD C1 CIRCUIT BOARD C2 CIRCUIT BOARD SU	1 1 1	A A A
RTL RTL RTL RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584	CIRCUIT BOARD C1 CIRCUIT BOARD C2 CIRCUIT BOARD SU CIRCUIT BOARD SD	1 1 1 1	Δ Δ Δ Δ
RTL RTL RTL RTL RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3	1 1 1 1 1	A A A A
RTL RTL RTL RTL RTL RTL RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE	CIRCUIT BOARD C1 CIRCUIT BOARD C2 CIRCUIT BOARD SU CIRCUIT BOARD SD CIRCUIT BOARD H3 CIRCUIT BOARD F	1 1 1 1 1 1 1	<ul> <li>⚠</li> <li>⚠</li> <li>⚠</li> <li>⚠</li> <li>⚠</li> <li>⚠</li> <li>⚠</li> </ul>
RTL RTL RTL RTL RTL RTL RTL RTL RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB	CIRCUIT BOARD C1 CIRCUIT BOARD C2 CIRCUIT BOARD SU CIRCUIT BOARD SD CIRCUIT BOARD H3 CIRCUIT BOARD F CIRCUIT BOARD Z CIRCUIT BOARD D1	1 1 1 1 1 1 1 1	A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD Z  CIRCUIT BOARD D1  CIRCUIT BOARD D2	1 1 1 1 1 1 1	A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589	CIRCUIT BOARD C1 CIRCUIT BOARD C2 CIRCUIT BOARD SU CIRCUIT BOARD SD CIRCUIT BOARD H3 CIRCUIT BOARD F CIRCUIT BOARD Z CIRCUIT BOARD D1 CIRCUIT BOARD D2 CIRCUIT BOARD D2 CIRCUIT BOARD P	1 1 1 1 1 1 1 1 1	A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2599 TNPA2534	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD Z  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD P  CIRCUIT BOARD SC	1 1 1 1 1 1 1 1 1	A A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2589 TNPA2534 TNPA2534	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD Z  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD P  CIRCUIT BOARD SC  CIRCUIT BOARD SS	1 1 1 1 1 1 1 1 1 1	A A A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2534 TNPA2535 TNPA2536	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD P  CIRCUIT BOARD SC  CIRCUIT BOARD SS  CIRCUIT BOARD SS2	1 1 1 1 1 1 1 1 1 1	A A A A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2534 TNPA2534 TNPA2535 TNPA2536 TNPA2537	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD D2  CIRCUIT BOARD SC  CIRCUIT BOARD SC  CIRCUIT BOARD SS  CIRCUIT BOARD SS2  CIRCUIT BOARD SS3	1 1 1 1 1 1 1 1 1 1 1 1 1	A A A A A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2534 TNPA2535 TNPA2536	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD P  CIRCUIT BOARD SC  CIRCUIT BOARD SS  CIRCUIT BOARD SS2	1 1 1 1 1 1 1 1 1 1	A A A A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2534 TNPA2534 TNPA2535 TNPA2536 TNPA2537	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD D2  CIRCUIT BOARD SC  CIRCUIT BOARD SC  CIRCUIT BOARD SS  CIRCUIT BOARD SS2  CIRCUIT BOARD SS3	1 1 1 1 1 1 1 1 1 1 1 1 1	A A A A A A A A A A A
RTL	TNPA2540 TNPA2541 TNPA2583 TNPA2584 TNPA2584 TNPA2249 TXN/F1MMSE TNPA2590 TZTNP01MMSB TNPA2589 TNPA2589 TNPA2534 TNPA2535 TNPA2536 TNPA2537 TNPA2622	CIRCUIT BOARD C1  CIRCUIT BOARD C2  CIRCUIT BOARD SU  CIRCUIT BOARD SD  CIRCUIT BOARD H3  CIRCUIT BOARD F  CIRCUIT BOARD D1  CIRCUIT BOARD D2  CIRCUIT BOARD P  CIRCUIT BOARD SC  CIRCUIT BOARD SS  CIRCUIT BOARD SS2  CIRCUIT BOARD SS3  CIRCUIT BOARD S1	1 1 1 1 1 1 1 1 1 1 1 1	A A A A A A A A A A A

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TZTNP020JAS	CIRCUIT BOARD HX	1	Δ
S061	TSE4GD0001	POWER SWITCH	1	K0F162B00002
S1554-56	EVQPBD05R	SWITCH	3	10110250002
01004 00	EVQI BBOSK	- Cimron		
SC2	K1KA06A00180	6P CONNECTOR	1	
SC20	K1KA08A00232	8P CONNECTOR	1	
SC21	K1KA11A00078	11P CONNECTOR	1	
SC23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SC41-44	K1KB40B00015	40P CONNECTOR	4	
SD1-D3	K1MN80B00004	80P CONNECTOR	3	
SS11	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
SS12	K1KA05A00139	5P CONNECTOR	1	1.11.A01.A00033
SS23	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
SS34	TJS1A8790	3P CONNECTOR	1	K1KA11A00073
SS40	K1KB07A00037	7P CONNECTOR	1	INTRAUGAUUZ 13
SS41-46	TJSF41013	13P CONNECTOR	6	K1MN13B00020
SS41-46 SS47	K1KB07A00037	7P CONNECTOR	1	K IIWIN I 3DUUU2U
		7P CONNECTOR  7P CONNECTOR	2	
SS48,49	K1KA07A00170	7F CONNECTOR		
SU1-U3	K1MN80B00004	80P CONNECTOR	3	
T401	ETS25AD1C3AG	SWITCHING TRANSFORMER	1	Δ
T501	G4D4A0000051	SWITCHING TRANSFORMER	1	Δ
T502	G4D4A0000052	SWITCHING TRANSFORMER	1	Δ
T6451	G4D1A0000055	SWITCHING TRANSFORMER	1	
T6471	G4D1A0000055	SWITCHING TRANSFORMER	1	
V34	K1KA08B00005	8P CONNECTOR	1	
			•	
X3801	H0J202500002	CRYSTAL	1	
X9200	H1A3305B0005	CRYSTAL	1	
X9350	TSSA120	CRYSTAL	1	H0J327200038
X9450	TSSA081	CRYSTAL	1	H0J245500024
X9451	TSS9038-B	CRYSTAL	1	H0J200500016
X9601	H1A5005B0015	CRYSTAL	1	
X9602	H1A6505B0004	CRYSTAL	1	
X9603	H1A6005B0008	CRYSTAL	1	
X9701	TSS9038-B	CRYSTAL	1	H0J200500016
X9901	H0J921400003	CRYSTAL	1	
Z3	TJS1A8090	PHONO PIN (3P)	1	K1KA03B00045
Z4	TJS1A8100	PHONO PIN (4P)	1	K1KA04B00056
Z6	TJS1A8830	CONNECTOR	1	K1KA07A00056
Z10	TJS1A8800	4P CONNECTOR	1	K1KA04A00242
Z17	TJS1A8840	8P CONNECTOR	1	K1KA08A00221

## 17.4. 37 inch Models (UZ Version) Electrical Replacement List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
044	I/4MANOODOOOO	CONNECTOR		
C11	K1MN80B00002	CONNECTOR	1	
C12	K1MN20B00043	CONNECTOR	1	
C21	K1MN80B00002	CONNECTOR	1	
C22	K1MN20B00043	CONNECTOR	1	
C23	K1KA11A00102	11P CONNECTOR	1	
C24	K1KA08A00232	8P CONNECTOR	1	
C081	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C502	ECQE6473KF	P 0.047UF, K,630V	1	
C503	ECKD3D101KBP	C 100PF, K, 2KV	1	
C504	ECKD3D102KBP	C 1000PF, K, 2KV	1	
C505-07	ECKDAE472ZE	C 4700PF, Z,	3	<u>A</u>
C508,09	EETHC2D122K	E 1200UF, 200V	2	
C510	ECKF1H471KB	C 470PF, K, 50V	1	
C511	ECQB1H221KF	P 220PF, K, 50V	1	
C512	ECA1EHG221	E 220UF, 25V	1	
C513	ECA1EHG101	E 100UF, 25V	1	
C514	EETHC2D102K	E 1000UF, 200V	1	
C517,18	ECKD3D152KBP	C 1500PF, K, 2KV	2	
C519	ECA1EHG221	E 220UF, 25V	1	
C520	ECKF1H471KB	C 470PF, K, 50V	1	
C521	ECKCNA102MBM	C 1000PF, Z,	1	ECKDNA102MB
C522	ECQB1H221KF	P 220PF, K, 50V	1	
C523	ECA1EHG221	E 220UF, 25V	1	
C524-26	ECKDAE472ZE	C 4700PF, Z,	3	Δ
C527	ECA2DHG220	E 22UF, 200V	1	
C528	ECKD2H821KB2	C 820PF, K,500V	1	ECKD2H821KB5
C529,30	ECQV1H104JM	P 0.1UF, J, 50V	2	
C531	ECA1EHG470	E 47UF, 25V	1	
C532	ECA1HHG220	E 22UF, 50V	1	
C601,02	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C603	ECA1EHG471	E 470UF, 25V	1	
C604	ECA1EHG101	E 100UF, 25V	1	
C605,06	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C607	ECA1EHG101	E 100UF, 25V	1	
C608	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C609	ECKD3D122KBP	C 1200PF, K, 2KV	1	
C611,12	EETHC2D182L	E 1800UF, 200V	2	
C613	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C614	ECA1EHG101	E 100UF, 25V	1	
C615	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C616	ECQB1H103JF	P 0.01UF, J, 50V	1	
C617	EEUEB1E101	E 100UF, 25V	1	
C618	ECKD3A101KBP	C 100PF, K, 1KV	1	
C619	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C620	ECA1HHG101	E 100UF, 50V	1	
C621	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C622	ECKD3A101KBP	C 100PF, K, 1KV	1	
C623	ECQB1H103JF	P 0.01UF, J, 50V	1	
C624,25	ECA1EHG222	E 2200UF, 25V	2	
C626	ECQB1H103JF	P 0.01UF, J, 50V	1	
C627	ECKD3A101KBP	C 100PF, K, 1KV	1	
C628,29	ECA1EHG222	E 2200UF, 25V	2	
		1		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C630	ECQB1H103JF	P 0.01UF, J, 50V	1	
C631	ECKD3A471KBP	C 470PF, K, 1KV	1	
C632	ECQV1H105JM	P 1UF, J, 50V	1	
C633	ECKD3A101KBP	C 100PF, K, 1KV	1	
C634	ECA1EHG472	E 4700UF, 25V	1	
C635	ECQB1H103JF	P 0.01UF, J, 50V	1	
C636	EEUFC0J122	E 1200UF, 6.3V	1	
C637	EETHC2C821B	E 820UF, 160V	1	
C638	ECKD2H103ZU	C 0.01UF, Z,500V	1	
C639	ECQB1H222JF	P 2200PF, J, 50V	1	
C640,41	EEUFC1V151	E 150UF, 35V	2	
C642,43	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C645	ECA1AHG471	E 4700UF, 10V	1	
C646	ECKD2H561KB2	C 560PF, K,500V	1	
C647	EEUFC1C471	E 470UF, 16V	1	
C648	ECA1EHG470	E 47UF, 25V	1	
C649	ECKD2H561KB2	C 560PF, K,500V	1	
C650	ECA1EHG102	E 1000UF, 25V	1	
C651	ECA1EHG470	E 47UF, 25V	1	
C652,53	ECKF1H223ZF	C 0.022UF, Z, 50V	2	
C900,01	ECQU2A224BN9	P 0.22UF, 250V	2	Δ
C902	ECQU2A105BN9	P 1UF, 250V	1	Δ
C903-06	ECKCNA221KB7	C 220PF, M,	4	Δ
C2312	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2313	ECA1HHG470	E 47UF, 50V	1	
C2314	EEVHB1C470	E 47UF, 16V	1	
C2316,17	ECQV1H474JM	P 0.47UF, J, 50V	2	
C2318,19	ECJ2XC1H561J	C 560PF, J, 50V	2	
C2320-22	ECJ2VF1H104Z	C 0.1UF, Z, 50V	3	
C2323	ECA1HHG221	E 220UF, 50V	1	
C2324	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2325	ECA1HHG221	E 220UF, 50V	1	
C2326,27	ECJ2XC1H221J	C 220PF, J, 50V	2	
C2328,29	ECJ2VF1H104Z	C 0.1UF, Z, 50V	2	
C2330	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2331	ECJ2XC1H101J	C 100PF, J, 50V	1	
C2332	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2333	ECJ2XC1H101J	C 100PF, J, 50V	1	
C2334,35	TCUY1C225KBM	C 2.2UF, 16V	2	F1K1C225A026
C2334,33	ECJ2XB1H473K	C 0.047UF, K, 50V	2	
C2338,39	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2330,39	ECJ2VF1H104Z	C 0.1UF, Z, 50V	4	
C2340-43	EEUGZ1D102SB	E 1000UF, 20V	4	
C2344-47	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
	ECJ2VF1H103Z ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2349,50 C2417	ECJ3XF1C475Z		1	
	EEVHB1C100	C 4.7UF, Z, 16V E 10UF, 16V	1	
C2419 C2422	ECJ3XF1C475Z		1	
		C 4.7UF, Z, 16V	1	
C2423	ECJ2XB1H103K	C 0.01UF, K, 50V		
C2426	ECJ2XB1H153K	C 0.015UF, K, 50V	1	
C2427	EEVHB1C100	E 10UF, 16V	1	
C2429	EEAGA1C101	E 100UF, 16V	1	
C2431	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2433	ECJ2XB1H393K	C 0.039UF, K, 50V	1	
C2434	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C2435	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2436	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2437,38	EEAGA1C101	E 100UF, 16V	2	
C2440,41	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2442	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2450	EEVHB1C100	E 10UF, 16V	1	
C2451	EEVHB1E4R7	E 4.7UF, 25V	1	
C2452	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2453	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2454	EEVHB1E4R7	E 4.7UF, 25V	1	
C2457	EEVHB1E4R7	E 4.7UF, 25V	1	
C2458	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2459	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2460	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2461	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2463	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2466,67	ECJ3VB1C104K	C 0.10UF, K, 16V	2	
C2480	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2484	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3001-03	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3001-03	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3004	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3003-07	ECJ1VF1H103Z		2	
C3008,09	ECJ2VF1C105Z	C 0.01UF, Z, 50V C 1UF, Z, 16V	3	
C3010-12	ECJ1VF1H103Z		2	
C3015,14	ECJ2VF1C105Z	C 0.01UF, Z, 50V C 1UF, Z, 16V	3	
C3013-17	ECJ1VF1H103Z		1	
C3019	EEVHB1C470	C 0.01UF, Z, 50V E 47UF, 16V	1	
C3019	ECJ1XF1C104Z		1	
		C 0.1UF, Z, 16V	1	
C3021	EEVHB1C470	E 47UF, 16V		
C3022	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3023	EEVHB1C470	E 47UF, 16V	1	
C3024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3026	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3027	EEVHB1C470	E 47UF, 16V	1	
C3028	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3029	EEVHB1C470	E 47UF, 16V	1	
C3030,31	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3032	EEVHB1C470	E 47UF, 16V	1	
C3033-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3036	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3037-39	EEVHB1C470	E 47UF, 16V	3	
C3040,41	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3042	EEVHB1C470	E 47UF, 16V	1	
C3049,50	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C3301,02	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C3303,04	EEVHB1C470	E 47UF, 16V	2	
C3305	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3306,07	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3309	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3310	EEVHB1C470	E 47UF, 16V	1	
C3311	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3312,13	EEVHB1C470	E 47UF, 16V	2	
C3314	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3351,52	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3353-60	ECJ2VF1C105Z	C 1UF, Z, 16V	8	
C3361	EEVHB1C470	E 47UF, 16V	1	
C3362	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3363	EEVHB1C470	E 47UF, 16V	1	
C3364	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3365	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3404	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3405	EEVHB1C470	E 47UF, 16V	1	
C3406	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3407	EEVHB1C470	E 47UF, 16V	1	
C3409	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3410	EEVHB1C470	E 47UF, 16V	1	
C3501	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3502	EEVHP1E220	E 22UF, 25V	1	
C3502	EEVHP1E100	E 10UF, 25V	2	
C3505,04	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3506	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C3507	ECJ2VF1C104Z	,	1	FIROJOOJAUUJ
C3507	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
C3509-12	EEVHB1C470	C 0.1UF, Z, 16V E 47UF, 16V	3	
		· ·		
C3520	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3521	EEVHB1C470	E 47UF, 16V	1	
C3523	EEVHB1C470	E 47UF, 16V	1	
C3524	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3529-31	ECJ3XB0J106M	C 10UF, M,6.3V	3	
C3533,34	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3542	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3544	EEVHB1C470	E 47UF, 16V	1	
C3550	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3551	EEVHB1C470	E 47UF, 16V	1	
C3561,62	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3591,92	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3593	ECJ2VF1E104Z	C 0.1UF, Z, 25V	1	
C3594,95	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3700	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3702	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3703	EEVHB1C470	E 47UF, 16V	1	
C3704	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3706	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3708	EEVHB0G221	E 220UF, 4V	1	
C3709	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3710-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3714	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3715	EEVHB0G221	E 220UF, 4V	1	
C3716	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3717,18	EEVHB1C470	E 47UF, 16V	2	
C3723	EEVHB1C470	E 47UF, 16V	1	
C3726	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3727,28	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3729	ECJ2XB1H471K	C 470PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3801	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3802	EEVHB1C470	E 47UF, 16V	1	
C3803	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3804	ECJ1XC1H470J	C 47PF, J, 50V	1	
C3805	ECJ1XC1H220J	C 22PF, J, 50V	1	
C3806	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3808	EEVHP1E220	E 22UF, 25V	1	
C3809	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3810	EEVHB0J220	E 22UF 6.3V	1	
C3812	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3815	EEVHB1C470	E 47UF, 16V	1	
C3816	EEVHP1E100	E 10UF, 25V	1	
C3817	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3818	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3819	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3820	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3821	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3823	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3824,25	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3828,29	ECJ2VF1C104Z	C 1UF, Z, 16V	2	
C3830,31	ECJ1XC1H180J	C 18PF, J, 50V	2	
C3832-34	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3835	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3836-38	ECJ2VF1C105Z	C 1UF, Z, 16V	3	F1R00333A003
C3840	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3841	TCUY0J335MBM		1	F1K0J335A003
		C 3.3UF, 6.3V	1	F1K03335A003
C3842	ECJ1XB1C104K	C 0.1UF, Z, 16V		
C3843	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3844	EEVHB0J152	E 1500UF, 6.3V	1	
C3845,46	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3848-50	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3852,53	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3854	ECJ1VC1H080C	C 8PF, C, 50V	1	
C3855-57	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3858	EEVHB0G221	E 220UF, 4V	1	
C3859,60	EEVHB0J152	E 1500UF, 6.3V	2	
C3861	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3862	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3863	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3864	ECJ2VF1C105Z	C 1UF, Z, 16V	1	-
C3865	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3866	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3867	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3868	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3869	ECJ1XC1H330J	C 33PF, J, 50V	1	
C3870,71	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3872	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3873	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3874	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3875	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3876	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C3877	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3878-83	ECJ2VF1C105Z	C 1UF, Z, 16V	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3884	ECJ1VB1H153K	C 0.15UF, K, 50V	1	
C3885	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3886	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3887	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3888	ECJ1XC1H101J	C 100PF, J, 50V	1	
C3889	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C3890	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C3891,92	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3893	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3894	EEVHB0G221	E 220UF, 4V	1	
C3896	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3897	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3898	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3899	ECJ1XC1H330J	C 33PF, J, 50V	1	
C4518	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C4551	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6401-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6411	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6411	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6417	ECJ2XB1H102K	C 220PF, K, 50V	1	
C6421	ECJ2XB1H221K	C 2200PF, K, 50V	1	
C6421	ECJ2XB1H222K	C 1000PF, K, 50V	1	
C6427	TACCP2E104MT		1	F1L2E1040002
		C 0.1UF, 250V	1	
C6429	TACCP2E104MT	C 0.1UF, 250V		F1L2E1040002
C6431	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6433	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6452	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6453	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6454	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6455	EEUFC1E221	E 220UF, 25V	1	
C6456	ECA2CM101	E 100UF, 160V	1	
C6457	EEUFC1E221	E 220UF, 25V	1	
C6458	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	EEUFC1E221	E 220UF, 25V	1	
C6462,63	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6464,65	ECA2CHG2R2	E 2.2UF, 160V	2	
C6472	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6473	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2AHG470	E 47UF, 100V	1	
C6481-88	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6490,91	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6492	ECA2VHG100	E 10UF, 350V	1	
C6493	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6501-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6511,12	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6513	ECA2CM101	E 100UF, 160V	1	
C6521	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6522	EEUFC1E470	E 47UF, 25V	1	
C6524,25	ECJ3FC2D102J	C 1000PF, J,	2	
	ECA2EHG4R7	E 4.7UF, 250V		1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6529	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6534	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6540	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6541,42	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6543,44	ECJ3FC2D102J	C 1000PF, J,	2	
C6545	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6546	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6547	ECJ3FC2D102J	C 1000PF, J,	1	
C6550	ECA2AHG470	E 47UF, 100V	1	
C6571,72	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6574-78	TCUY1C105ZFN	C 1UF, 16V	5	F1J1C1050006
C6580,81	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6598	ECA2CHG220	E 22UF, 160V	1	
C6601-04	F2A2D1510004	E 150UF, 200V	4	
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6608	EEUFC1E471	E 470UF, 25V	1	
C6611-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6621-28	ECQE2105RKB	P 1UF, 250V	8	
C6631,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6633	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6634,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	1 1310 1030000
C6636	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6637	EEUFC1E121	E 120UF, 25V	1	F131C1030000
C6638	ECWU1224KC9		1	
C6639	F2A2D1510004	P 0.22UF, 100V	1	
		E 150UF, 200V		E41 2E4040002
C6642	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6644	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6645	ECJ3YB1E105K	C 1UF, K, 25V	1	
26646	EEUFC1E121	E 120UF, 25V	1	E4 14 0 4 0 E 0 0 0 0
C6647	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6655,56	EEUFC1A101	E 100UF, 10V	2	
C6660-77	ECJ3XK2J102K	C 1000PF, K,630V	18	
C6695,96	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6701-04	F2A2D1510004	E 150UF, 200V	4	
C6707,08	EEUED2C470	E 47UF, 160V	2	
C6711-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6721-28	ECQE2105RKB	P 1UF, 250V	8	
C6731,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6733	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6734,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6736	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6738	ECWU1224KC9	P 0.22UF, 100V	1	
C6739	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6740	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6741,42	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6744	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6745,46	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6747	F2A2D1510004	E 150UF, 200V	1	
C6748	EEUFC1E221	E 220UF, 25V	1	
C6749	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6750,51	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6753,54	EEUFC1E221	E 220UF, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6755	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6756	EEUFC1A101	E 100UF, 10V	1	
C6760,61	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6771-78	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6781	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6786	ECJ3XK2J102K	C 1000PF, K,630V	1	
C7101	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7102	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C7104-06	TCUY1C105ZFN	C 1UF, 16V	3	F1J1C1050006
C7107	F1K2A1040004	C 0.1UF, 100V	1	
C7113	F1K2A1040004	C 0.1UF, 100V	1	
C7115	F1K2A1040004	C 0.1UF, 100V	1	
C7117	F1K2A1040004	C 0.1UF, 100V	1	
C7131	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7131	ECJ3XB0J106M	· ·	3	F131C1030000
		C 10UF, M,6.3V		E4 14C40E000C
C7201	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7202	ECJ3XB0J106M	C 10UF, M,6.3V	1	F4 14040F3333
C7203-06	TCUY1C105ZFN	C 1UF, 16V	4	F1J1C1050006
C7207	F1K2A1040004	C 0.1UF, 100V	1	
C7210	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7211	F1K2A1040004	C 0.1UF, 100V	1	
C7213	F1K2A1040004	C 0.1UF, 100V	1	
C7215	F1K2A1040004	C 0.1UF, 100V	1	
C7217	F1K2A1040004	C 0.1UF, 100V	1	
C8001	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8002	EEVHP1E220	E 22UF, 25V	1	
C8003	ECJ1VB1H471K	C 470PF, K, 50V	1	
C8004	ECKF1H331KB	C 330PF, K, 50V	1	F1B1H331A005
C8005	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8008	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8009	TCUY1C475ZFM	C 4.7UF, 16V	1	F1K1C4750018
C8010	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C8011	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8012	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C8013	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C8014,15	ECJ1VB1H103K	C 0.01UF, K, 50V	2	
C8016	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8017	EEVHB1C470	E 47UF, 16V	1	
C8018	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C8019	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
		C 100PF, J, 50V	1	
C8020	ECJ1XC1H101J ECJ2XC1H222J		1	+
C8021		C 2200PF, J, 50V		+
C9000,01	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9002	EEVHB1C470	E 47UF, 16V	1	-
C9003	EEVHB0G221	E 220UF, 4V	1	-
C9004	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9005	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	-
C9008-10	EEVHP1E220	E 22UF, 25V	3	
C9011	EEVHB1C470	E 47UF, 16V	1	
C9012	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9014	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9015	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9016	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9017-19	ECJ1XC1H030C	C 3PF, C, 50V	3	
C9021-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9025,26	ECJ2VB1E473K	C 0.047UF, K, 25V	2	
C9027	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9028	ECJ2VB1E473K	C 0.047UF, K, 25V	1	
C9031	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9032,33	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9034	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9035	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9036	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9037-39	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9040	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C9041	ECJ1VB1H392K	C 3900PF, K, 50V	1	
C9042	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9045	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9043 C9048,49	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9048,49	ECJ1XF1C1042 ECJ1XC1H101J	C 100PF, J, 50V	1	
C9202	EEVHB0J330	E 33UF, 6.3V	1	
C9202	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9204-06	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	FIROJOOJAUUS
C9204-06	ECJ1XF1C104Z		5	
C9208-12	TCUY0J685MBM	C 0.1UF, Z, 16V C 6.8UF, 6.3V	1	F1K0J685A003
		,		FIRUJOOJAUUS
C9215	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9216	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	E41/0 100E 4000
C9217	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9218-20	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9225,26	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9229	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9236,37	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9243-46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9255	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9256	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9258-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9261	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9262	ECJ2XB1H153K	C 0.015UF, K, 50V	1	
C9263	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C9264	ECJ2VB1E563K	C 0.056UF, K, 25V	1	
C9265	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9266	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9267	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9268	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9269	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9300	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9304,05	EEVHB0G221	E 220UF, 4V	2	
C9306-08	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C9310	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9312	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9314	EEVHB0G221	E 220UF, 4V	1	
C9315	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9316	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9317	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9318	ECJ3VB1C104K	C 0.10UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9319	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9320	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9321	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9353	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9354	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9355	EEVHB1C470	E 47UF, 16V	1	
C9356	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9357	EEVHB1C470	E 47UF, 16V	1	
C9358	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9361-66	ECJ1XC1H101J	C 100PF, J, 50V	6	
C9367	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9368	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9369,70	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9371	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9372	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9373	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9374	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9375	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9377,78	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9379,80	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9381	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9382	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	T THOUGHT TOO
C9383	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9385	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9387,88	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9390,91	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9392	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9393	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9400	EECS5R5V155	E 1.5UF, 5.5V	1	
C9401	ECJ1XF1C104Z		1	
		C 0.1UF, Z, 16V	2	
C9402,03	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9450	ECJ1XF1C104Z ECJ3XF1C475Z	C 0.1UF, Z, 16V		
C9451		C 4.7UF, Z, 16V	1	
C9452,53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9454	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9455-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9464	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9465	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9466,67	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9468	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9469	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9470	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9472	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9501,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9503	EEVHB1C470	E 47UF, 16V	1	
C9504	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9505	EEVHB1C470	E 47UF, 16V	1	
C9506	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9507	F2G0J1010021	E 100UF 6.3V	1	
C9509,10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9551	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9552,53	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C9554	F2G0J1010021	E 100UF 6.3V	1	
C9555,56	ECJ2XB1E104K	C 0.1UF, K, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9557,58	F2G1C4700030	E 47UF, 16V	2	
C9559	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9560	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C9561,62	F2G1C4700030	E 47UF, 16V	2	
C9563	F2G0J1010021	E 100UF 6.3V	1	
C9564	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9565	EEVHB0G221	E 220UF, 4V	1	
C9566	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9567	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9570	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9572	EEVHB0G221	E 220UF, 4V	1	
C9573	F2G0J1010021	E 100UF 6.3V	1	
C9574	EEVHB1C470	E 47UF, 16V	1	
C9575,76	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9577	F2G0J1010021	E 100UF 6.3V	1	
C9578	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9579	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9601	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9602	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9603-07	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9608	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9610	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	1 1110000071000
C9611-16	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9619	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9620-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9625	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9627,28	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9629	ECJ1XC1H331J	C 330PF, J, 50V	1	
C9629	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9631	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9632	ECJ3XF1C475Z	-	1	F131C1030006
		C 4.7UF, Z, 16V	2	
C9633,34 C9635	ECJ1XF1C104Z	C 0.1UF, Z, 16V		E4 14C40E000C
	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9701	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9702-05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9706	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9707-10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9713	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9715	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9716	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9717	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9718,19	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	F41/0 1007 1007
C9720	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9721,22	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9723	ECJ1XC1H471J	C 470PF, J, 50V	1	
C9724,25	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9726-28	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9730	EEVHB1C470	E 47UF, 16V	1	
C9731	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9732	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9801-03	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9805-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	18	
C9826	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9827	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9828	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	Tromaine .
C9829	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9901,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9903	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9904,05	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9910	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C9911	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9912	EEVHB1C470	E 47UF, 16V	1	
C9912 C9913	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9913	ECJ1XC1H102J		1	F131C1030000
C9914 C9915		C 1000PF, J, 50V	1	
	ECJ1VB1C563K	C 0.056UF, K, 16V	-	
C9916	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9918	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	E41/4000E4000
C9923	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C9925	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9926	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
CB1-B7	K1MN80B00004	80P CONNECTOR	7	
D4	MAKATOROOGA	TOD COMMECTOD		
D1	K1KA50B00064	50P CONNECTOR	1	
D2,D3	K1KA40B00076	40P CONNECTOR	2	
D4	K1KA12B00066	CONNECTOR	1	
D10	K1KA04A00199	CONNECTOR	1	
D12,13	K1KA50A00125	CONNECTOR	2	
D16	K1KA10A00317	10P CONNECTOR	1	
D17	K1KA08A00293	8P CONNECTOR	1	
D20	K1KA08A00232	8P CONNECTOR	1	
D21	K1KA11A00078	11P CONNECTOR	1	
D22,23	K1KA50A00125	CONNECTOR	2	
D25	K1KA11A00102	11P CONNECTOR	1	
D26	K1KA10A00317	10P CONNECTOR	1	
D27	K1KA09A00077	9P CONNECTOR	1	
D31,32	K1MN80B00002	CONNECTOR	2	
D081	LNJ107W5PRW	LED	1	
D082	MA8056M	ZENER DIODE	1	MAZ80560M
D501	TVSRG2A	DIODE	1	B0EAKR000024
D502	D15XB60	DIODE	1	$\Delta$
D503	TMPG10G3	DIODE	1	B0BA01000046
D504,05	ERA22-04	DIODE	2	B0HAGP000001
D506	B0BA02700021	DIODE	1	
D508	ERA22-04	DIODE	1	B0HAGP000001
D509	TMPG10G3	DIODE	1	B0BA01000046
D510-12	ERA22-04	DIODE	3	B0HAGP000001
D513	B0BA02700021	DIODE	1	
D514	S1WBA80	DIODE	1	воевктоооооз 🛆
D515	D1NL40V70	DIODE	1	B0HALP000002
D516	MA4082L	ZENER DIODE	1	MAZ40820L
D517-19	PC123FY2	PHOTO COUPLER	3	ВЗРАА000012 🕭
D601	MA165	DIODE	1	MA2C165
D602	ERA22-04	DIODE	1	B0HAGP000001
D603	FMLG16S	DIODE	1	B0HARR000008
D604	MA4056H	ZENER DIODE	1	MAZ40560H
D605	ERA22-04	DIODE	1	B0HAGP000001
	1	<u> </u>		1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D606	MA4039H	ZENER DIODE	1	MAZ40390H
D607-10	ERA22-04	DIODE	4	B0HAGP000001
D611	MA4047H	ZENER DIODE	1	MAZ40470H
D612	MA4056M	ZENER DIODE	1	MAZ40560M
D614,15	ERC91-02	DIODE	2	B0HAPM000003
D617	B0HFRJ000012	DIODE	1	
D618,19	MA165	DIODE	2	MA2C165
D620	AK04	DIODE	1	B0JAMC000003
D621	ERC91-02	DIODE	1	B0HAPM000003
D622	D1NL40V70	DIODE	1	B0HALP000002
D623,24	MA167	DIODE	2	MA2C167
D625	MA700A	DIODE	1	MA2C700A
D626,27	MA167	DIODE	2	MA2C167
D628	EU02	DIODE	1	WAZCIO
			1	DOLLA C DOCCOOM
D629	ERA22-04	DIODE	-	B0HAGP000001
D630	ERA15-02	DIODE	1	B0EAKM000016
D631	MA4056M	ZENER DIODE	1	MAZ40560M
D632	EU02	DIODE	1	
D633	MA4051M	ZENER DIODE	1	MAZ40510M
D634,35	MA165	DIODE	2	MA2C165
D900	ERZV10V621P2	VARISTOR	1	<u> </u>
D2301-04	M1FS4	DIODE	4	B0JCME000025
D2305,06	RU4AM	DIODE	2	
D2307	MA111	DIODE	1	MA2J111
D2308	MA152	DIODE	1	
D2316	M1FS4	DIODE	1	B0JCME000025
D3001	MA111	DIODE	1	MA2J111
D3002	M1FS4	DIODE	1	1117 120 111
D3351,52	MA153	DIODE	2	MA3X153
D3501-04	MA3056M	ZENER DIODE	4	MAZ30560M
	MA153	DIODE	2	MA3X153
D3505,06		DIODE	1	
D3507	MA111		-	MA2J111
D6401-03	MA8056H	ZENER DIODE	3	MAZ80560H
D6405	D1FL40F4063	DIODE	1	B0ECHP000001
D6406,07	MA8056H	ZENER DIODE	2	MAZ80560H
D6409-12	D1FL40F4063	DIODE	4	B0ECHP000001
D6452,53	MA111	DIODE	2	MA2J111
D6454	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6455	MA111	DIODE	1	MA2J111
D6456	D1FL40F4063	DIODE	1	B0ECHP000001
D6457	M1FL20UF4063	DIODE	1	B0HCMM000009
D6458	TLP181	PHOTO COUPLER	1	B3PBA000081
D6459	MA111	DIODE	1	MA2J111
D6460,61	B0HCKS000001	DIODE	2	
D6465,66	MA8330M	ZENER DIODE	2	MAZ83300M
D6467	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6468	MA111	DIODE	1	MA2J111
D6469	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6470	MA111	DIODE	1	MA2J111
D6472,73	MA111	DIODE	2	MA2J111
D6474	TLP181	PHOTO COUPLER	1	B3PBA000081
D6475	MA111	DIODE	1	MA2J111
	D1FL40F4063	DIODE	1	B0ECHP000001
D6476	P11 F40E4003	DIODE	1 '	POPOLIL 000001

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6478	B0HCKS000001	DIODE	1	
D6479	MA111	DIODE	1	MA2J111
D6480	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6481,82	MA8330M	ZENER DIODE	2	MAZ83300M
D6491,92	D1FL40F4063	DIODE	2	B0ECHP000001
D6495	B0HCKS000001	DIODE	1	
D6501-08	K7GBZEE00002	PHOTO COUPLER	8	
D6509	MA111	DIODE	1	MA2J111
D6511	M1FL20UF4063	DIODE	1	B0HCMM000009
D6512-14	MA111	DIODE	3	MA2J111
D6521	D1FL40F4063	DIODE	1	B0ECHP000001
D6522	MA111	DIODE	1	MA2J111
D6523	D1FL40F4063		1	B0ECHP000001
		DIODE	-	
D6524	MA8051L	DIODE	1	MAZ80510LL
D6525	MA111	DIODE	1	MA2J111
D6526	M1FL20UF4063	DIODE	1	B0HCMM000009
D6527	MA111	DIODE	1	MA2J111
D6531	MA8051L	DIODE	1	MAZ80510LL
D6541	B0HCKS000001	DIODE	1	
D6542	MA111	DIODE	1	MA2J111
D6543	MA8051L	DIODE	1	MAZ80510LL
D6544	MA111	DIODE	1	MA2J111
D6545	MA8051L	DIODE	1	MAZ80510LL
D6546-48	MA8330M	ZENER DIODE	3	MAZ83300M
D6549,50	MA111	DIODE	2	MA2J111
D6551,52	MA8051L	DIODE	2	MAZ80510LL
D6553	MA111	DIODE	1	MA2J111
D6570	M1FL20UF4063	DIODE	1	B0HCMM000009
D6572	D1FL40F4063	DIODE	1	B0ECHP000001
D6582	MA8051L	DIODE	1	MAZ80510LL
D6583		LED	1	WAZOUSTULL
	LNJ201LPQJA			MAQ 1444
D6584	MA111	DIODE	1	MA2J111
D6585,86	MA8330M	ZENER DIODE	2	MAZ83300M
D6611,12	M1FS4	DIODE	2	
D6615	D1FL40F4063	DIODE	1	B0ECHP000001
D6620-22	SF20LC30F10	DIODE	3	
D6624	SF20LC30F10	DIODE	1	
D6629	B0HBSM000031	DIODE	1	
D6635	MA8051L	DIODE	1	MAZ80510LL
D6636	MA111	DIODE	1	MA2J111
D6637	D1FL40F4063	DIODE	1	B0ECHP000001
D6640	D1FL40F4063	DIODE	1	B0ECHP000001
D6641,42	M1FS4	DIODE	2	
D6645-47	D1FL40F4063	DIODE	3	B0ECHP000001
D6711,12	M1FS4	DIODE	2	
D6715	D1FL40F4063	DIODE	1	B0ECHP000001
D6720-22	SF20LC30F10	DIODE	3	
D6724	SF20LC30F10	DIODE	1	
			1	
D6729	B0HBSM000031	DIODE	_	MA79054011
D6735	MA8051L	DIODE	1	MAZ80510LL
D6736	MA111	DIODE	1	MA2J111
D6737	D1FL40F4063	DIODE	1	B0ECHP000001
D6740,41	D1FL40F4063	DIODE	2	B0ECHP000001
D6750,51	D1FL40F4063	DIODE	2	B0ECHP000001

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6752,53	M1FS4	DIODE	2	
D6754	D1FL40F4063	DIODE	1	B0ECHP000001
D6755	M1FS4	DIODE	1	
D6757	D1FL40F4063	DIODE	1	B0ECHP000001
D6760	MA111	DIODE	1	MA2J111
D6761	MA8051L	DIODE	1	MAZ80510LL
D6763	MA8051L	DIODE	1	MAZ80510LL
D6764	MA111	DIODE	1	MA2J111
D6765	LNJ201LPQJA	LED	1	
D6766,67	MA8330M	ZENER DIODE	2	MAZ83300M
D6768	MA111	DIODE	1	MA2J111
D6769	LNJ201LPQJA	LED	1	
D6770	MA111	DIODE	1	MA2J111
D7201-04	MA152K	DIODE	4	MA3X152K
D8001,02	MA111	DIODE	2	MA2J111
D9000	MA3036H	ZENER DIODE	1	MAZ30360H
D9001-09	MA3062M	ZENER DIODE	9	MAZ30620M
D9351	MA152K	DIODE	1	MA3X152K
D9352,53	MA3062M	ZENER DIODE	2	MAZ30620M
D9356	MA111	DIODE	1	MA2J111
D9550	B0JCPD000010	DIODE	1	
D9550 D9551	MA113	DIODE	1	MA2J113
D9551 D9552	M1FS4	DIODE	1	
D9552 D9553	MA152K	DIODE	1	MA3X152K
D9554	MA111	DIODE	1	MA2J111
D9902	MA152K	DIODE	1	MA3X152K
D3302	WAISZK	DIODE	<u>'</u>	WASK132K
F900-1	EYF-52BC	FUSE HOLDER	1	
F1	TJS3A9630	CONNECTOR	1	K1KA03A00183
F900-2	EYF-52BC	FUSE HOLDER	1	111111111111111111111111111111111111111
F9	TJS3A9630	CONNECTOR	1	K1KA03A00183
F901-1,-2	EYF-52BC	FUSE HOLDER	2	KITCAGGAGGTGG
1 301 1, 2	211 3250	1 GOL HOLDEN	<u> </u>	
H1	K1KB50B00030	50P CONNECTOR	1	
H2	K1KB40B00015	40P CONNECTOR	1	
H37	TJS3A9640	3P CONNECTOR	1	K1KA03A00171
	1000000	J. COMMEDIUM	+ '	INTROUGHUIT I
HX1	K1KB40B00015	40P CONNECTOR	1	
11/1	KIKDTOBOOTS	TO COMMEDIUM	+ '	
IC081	B3L000000020	IC	1	
IC501	STRF6629B	IC	1	C0DAAMH00002
IC501	STRF6629B	LINEAR IC	1	C5HABZZ00014
IC502 IC503	MIP0210SY1TV		1	G3FIABZZ00014
	AN7718F	IC (LOGIC)	1	
IC504		LINEAR IC	-	
IC601	AN6912	LINEAR IC	1	
IC602	AN1431T	LINEAR IC	1	
IC603	C0DAAHG00007	IC	1	000 4571100000
IC604	PQ30RV21A	LINEAR IC	1	C0DAEZH00008
IC605,06	AN1431T	LINEAR IC	2	
IC607	AN7705F	LINEAR IC	1	
IC2301,02	TDA7480	LINEAR IC	2	C1AA00000561
IC2304	PQ09SZ1T	IC	1	C0CBAHG00005
IC2401	BH3865S	LINEAR IC	1	C1BA00000302
IC3001	C1AB00001139	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC3002,03	MC14052BF	MOS IC (CMOS GATE ARRLY)	2	C0JBAR000021
IC3004	CXA1315M	LINEAR IC	1	C1AB00000440
IC3006	PQ09SZ1T	IC	1	C0CBAHG00005
IC3007,08	PQ12SZ1T	IC	2	C0CBAKG00003
IC3009	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	C0JBAS000109
IC3301	TC4W53F	MOS IC (CMOS S/LOGIC)	1	C0JBAR000224
IC3302	C0ABGB000001	IC	1	
IC3303	TC4W53F	MOS IC (CMOS S/LOGIC)	1	C0JBAR000224
IC3501	JLC1562BF	MOS IC (MICON LSI)	1	C0JBAZ001265
IC3502	TVRJ696-1	IC	1	
IC3515	C0ZBZ0000205	IC	1	
IC3699	TVRJ642-2	ROM IC (EEPROM 16KBIT)	1	
IC3801	MM1065ZMR	LINEAR IC	1	C0CBABB00029
C3802	C0EBE0000066	IC	1	
C3803	C3ABMG000086	IC	1	
IC3804	C1AB00001494	IC	1	
C3805,06	MM1065ZMR	LINEAR IC		C0CBABB00029
IC3809	TC74LCX244F	MOS IC (CMOS S/LOGIC)	1	C0JBAZ001234
IC4551	C0JBAE000228	IC	<u>_</u>	2302, 2301207
C6401-08	C0HBC0000005	IC	8	
IC6451	AN1431M	LINEAR IC	1	
C6452.53	AN78L15M	LINEAR IC		
IC6452,33	AN78L05M	LINEAR IC	1	
IC6454	AN1431M	LINEAR IC	1	
IC6491	AN1431M	LINEAR IC	<u>'</u> _	
	TC74HC14AF	IC	2	C0JBAB000155
IC6501,02 IC6511	C0ZBZ0000561	IC	1	COSBABOOUTSS
		IC	1	
IC6521	C0ZBZ0000561	IC IC		
IC6541,42	C0ZBZ0000561		2	COPPRAGGGG
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6601-03	C0ZBZ0000138	IC LINEAR IO	3	
IC6604	AN1431M	LINEAR IC	1	
IC6605,06	TC74HC244AF	IC	2	
IC6701-03	C0ZBZ0000138	IC	3	
IC6704	C0ZBZ0000561	IC	1	
IC6705	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6706	TC74HC244AF	IC	1	
IC6711	AN1431M	LINEAR IC	1	
IC7101	C0JBAZ000005	IC	1	
IC7103	C0DBEZG00004	IC	1	
IC7201	C0JBAZ000005	IC	1	
IC8001	M52346SP	LINEAR IC	1	C1AA00000395
IC8002	TC74HC14AF	IC	1	C0JBAB000155
C9000	PQ09SZ1T	IC	1	C0CBAHG00005
IC9001	C0CBCBD00005	IC	1	
C9002-04	C0ABHA000033	IC	3	
IC9006	C0CBCBD00005	IC	1	
C9007	C0FBAD000069	IC	1	
C9200	MN84504	MOSIC	1	
C9203	C0CBCBD00005	IC	1	
IC9206	C0JBAZ000855	IC	1	
IC9210	C3ABPJ000017	IC	1	
IC9212	TLC2933IPWL	INTEGRATED CIRCUIT	1	C0ABFA000012
IC9213	C0CBCBD00005	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9300	C0ZBZ0000551	IC	1	
IC9301	C0CBCBD00005	IC	1	
IC9351	MN102L230	IC	1	
IC9353	HM538123BJ8Z	IC	1	C3HAHC000006
IC9354	TVRJ799-1	IC	1	
IC9355	TVRJ868	IC	1	
IC9356	C0JBAZ001201	IC	1	
IC9357	C1DB00000274	IC	1	
IC9450S	TJSB01108	IC SOCKET	1	
IC9450	TVRJ709-1	INTEGRATED CIRCUIT	1	
IC9451	C1ZBZ0001996	IC	1	
C9452	TC74HCU04AF	MOS IC (CMOS S/LOGIC)	1	C0JBAB000159
C9453	C0EBE0000066	IC	1	COOBABOOTISS
IC9455 IC9455	C0CBCAD00007	IC	1	
C9550	CODBAZH00008	IC IC	1	
IC9551	C0DBAMH00006	IC	1	
C9552	C0DBEZG00004	IC	1	-
IC9553	C0JBAZ001604	IC	1	
IC9554	JLC1562BF	MOS IC (MICON LSI)	1	C0JBAZ001265
IC9601	MN84505	MOSIC	1	
C9602	C3ABPJ000043	IC	1	
IC9603	TVRJ741-1	IC	1	
IC9604	C0ZBZ0000423	IC	1	
C9612	C0JBAZ000855	IC	1	
C9700S	TJSB01108	IC SOCKET	1	
IC9700	TVRJ742-2	INTEGRATED CIRCUIT	1	
IC9701	C1ZBZ0001996	IC	1	
IC9702	PST9128NR	IC (LOGIC)	1	C0EBE0000066
IC9703	C0CBCAD00007	IC	1	
IC9704	C0ZBZ0000423	IC	1	
IC9710-12	C0JBAZ001604	IC	3	
C9801	C0JBAZ001604	IC	1	
IC9802,03	C0JBAZ000005	IC	2	
IC9805-22	TC74LCX574F	MOS IC (CMOS S/LOGIC)	18	C0JBAF000218
		, ,	+ -	CUJBAFUUUZ18
IC9900	C2BBFE000121	IC LINEAR IC	1	COEDDOCOCO
IC9902	M51957BFP	LINEAR IC	1	C0EBB0000024
IC9904	C0JBAE000283	IC	1	
				-
JK3301	K1CB106B0027	CONNECTOR	1	
JK3305	K2HA306B0048	JACK	1	
JK3306	K2HA306B0049	JACK	1	
JK3307	K2HA204B0097	JACK	1	
JK3308	K2HA204B0096	JACK	1	
JK3509	K1FB109B0058	CONNECTOR	1	
JK3511	TJS8A9880	CONNECTOR	1	K1FB115B0034
JK3513	K2HC103B0105	JACK	1	
JK8500	K4BC02B00013	TERMINAL	1	
JS24	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS28-32	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS35	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2301	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS8019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	- LINGS - I UNUU	0 0:1111, 1/1000	+ '-	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L501	ELF11M010E	LINE FILTER	1	Δ
L502	TLPF116	CHOKE COIL	1	Δ
L503	ELEXT100KA	PEAKING COIL	1	
L601,02	TALL08N470KA	INDUCTION COIL	2	G0A470GA0011
_603	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008
L604	EXCELSA39	BEAD CHOKE	1	
L605-07	EXCELDR35C	BEAD CHOKE	3	
L608	EXCELSA39	BEAD CHOKE	1	
L609-11	EXCELDR35C	BEAD CHOKE	3	
L612	TALFP15B221K	INDUCTION COIL	1	G0A221GA0001
L613-16	EXCELDR35C	BEAD CHOKE	4	
L902,03	G0B123K00001	CHOKE COIL	2	Δ
L2301,02	G0ZZ00002023	COIL	2	
L2303,04	EXCELDR35C	BEAD CHOKE	2	
L2306	ELJPA100KB	CHIP INDUCTOR	1	
L3001-03	ELJPA100KB	CHIP INDUCTOR	3	
L3007,08	ELJPA100KB	CHIP INDUCTOR	2	
L3301	TLK20LFA223M	EMI FILTER	1	J0HABB000003
L3302,03	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3304,05	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3306,07	ELJPA100KB	CHIP INDUCTOR	2	1
L3351,52	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3353-55	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3356,57	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3358,59	ELJPA100KB	CHIP INDUCTOR	2	00.111.122000000
L3501	ELJPA100KB	CHIP INDUCTOR	1	
L3507-09	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3510-13	TLK212T256AL	EMI FILTER	4	J0HAAB000012
L3525,26	ELJPA100KB	CHIP INDUCTOR	2	OOTIAADOOOTZ
L3530	ELJPA100KB	CHIP INDUCTOR	1	
L3555	ELJPA100KB	CHIP INDUCTOR	1	
L3801,02	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3801,02 L3803	G1C100KA0008	INDUCTOR COIL	1	3011ABB000004
L3803	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
L3804	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
		CHIP INDUCTOR COIL	1	G1C2R2K00006
L3807	TALC168T2R2K	INDUCTOR COIL	1	GICZRZNUUUU
L3808	G1C100KA0008			
L3809	TALC325T4R7M	CHIP INDUCTOR COIL	1	
L3810,11	G1C100KA0008	INDUCTOR COIL	2	C1C4P7V00040
L3813	TALC168T4R7K	CHIP INDUCTOR COIL	1	G1C4R7K00013
L3814-16	G1C100KA0008	INDUCTOR COIL	3	IOLIADDO00004
L3817-19	TLK20LFA224M	EMI FILTER	3	JOHABB000004
L3820,21	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3822-25	ELKE103FA	NOISE FILTER	4	IOLIA DDCCCCC
_3826,27	TLK20LFA224M	EMI FILTER	2	JOHABB000004
_3828,29	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3830	ELJPA100KB	CHIP INDUCTOR	1	-
L4551	ELJPA100KB	CHIP INDUCTOR	1	
L6451,52	J0JJC0000021	CHIP INDUCTOR	2	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	TSKA158	BEAD CORE	1	G0ZZ00001935
L6602	TSKA158	BEAD CORE	1	G0ZZ00001935
L6604,05	TSKA158	BEAD CORE	2	G0ZZ00001935

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6611,12	ELC16BR82L	CHOKE COIL	2	
L6615,16	ELC16BR82L	CHOKE COIL	2	
L6618	J0JJC0000021	CHIP INDUCTOR	1	
L6620-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6626,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6636,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6644,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6647,48	J0JJC0000021	CHIP INDUCTOR	2	
L6702-04	TSKA158	BEAD CORE	3	G0ZZ00001935
L6705	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008
L6711	ELC16BR82L	CHOKE COIL	1	
L6713,14	ELC16BR82L	CHOKE COIL	2	
L6716	ELC16BR82L	CHOKE COIL	1	
L6718	J0JJC0000021	CHIP INDUCTOR	1	
L6720-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6726,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6736,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6744,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6747	J0JJC0000021	CHIP INDUCTOR	1	-3220001000
L6750	TSKA158	BEAD CORE	1	G0ZZ00001935
L7101-03	J0JJC0000021	CHIP INDUCTOR	3	2022001000
L7101-03	J0JJC0000021	CHIP INDUCTOR	1	
L7201-05	J0JJC0000021	CHIP INDUCTOR	5	
L8001,02	ELJPA100KB	CHIP INDUCTOR	2	
L8501,02	TLPD061	LINE FILTER	2	G0A2R5H00003
L9001-04	ELKE103FA	NOISE FILTER	4	GUAZKSHUUUUS
L9001-04	EXCCL3225U1	EMI FILTER	6	
			2	
L9200,01	EXCCL3225U1	EMI FILTER		
L9300	EXCCL3225U1	EMI FILTER	1	
L9350	ELJPA100KB	CHIP INDUCTOR	1	
L9450	EXCCL3225U1	EMI FILTER	1	
L9451	ELJPA150KF	CHIP INDUCTOR	1	
L9551	G1C220M00029	INDUCTOR COIL	1	
L9552	G1C470M00012	INDUCTOR COIL	1	
L9553	EXCCL3225U1	EMI FILTER	1	
L9601	ELJFA1R0KF	CHIP COIL	1	
L9701	EXCCL3225U1	EMI FILTER	1	
L9801	EXCCL3225U1	EMI FILTER	1	
L9803	EXCCL3225U1	EMI FILTER	1	
L9805-08	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
1.00000 00	IOFOFOFF	LOD EU TED	<u> </u>	
LC9000-02	J0E3505B0002	LCR FILTER	3	
LC9003	ELKE103FA	NOISE FILTER	1	
LC9006	ELKE103FA	NOISE FILTER	1	
LC9300-02	ELKE103FA	NOISE FILTER	3	
LC9501-05	ELKE103FA	NOISE FILTER	5	
LC9507,08	ELKE103FA	NOISE FILTER	2	
LC9801-03	ELKE103FA	NOISE FILTER	3	
LC9901	ELKE103FA	NOISE FILTER	1	-
P1	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
P2	K1KA06A00180	6P CONNECTOR	1	
. 4	111111111111111111111111111111111111111			
P6	K1KA07A00056	7P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
P10	TJS1A8810	5P CONNECTOR	1	K1KA05A00177
P12	K1KA05A00139	5P CONNECTOR	1	
P23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
P25	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
P27	TJS1A8850	9P CONNECTOR	1	K1KA09A00099
Q082	2SD601A	TRANSISTOR	1	2SD0601A
Q601	2SA1309A	TRANSISTOR	1	2SA13090WA
Q602	B1DEGQ000019	FET	1	
Q603	2SC3311A	TRANSISTOR	1	2SC3311AW
Q604	2SB621A	TRANSISTOR	1	2SB0621AW
Q605-08	2SC3311A	TRANSISTOR	4	2SC3311AW
Q2301-03	2SD601A	TRANSISTOR	3	2SD0601A
Q2305,06	2SD601A	TRANSISTOR	2	2SD0601A
Q2406	2SD601A	TRANSISTOR	1	2SD0601A
Q2408	2SD601A	TRANSISTOR	1	2SD0601A
Q2410	2SD601A	TRANSISTOR	1	2SD0601A
Q3013,14	2SD601A	TRANSISTOR	2	2SD0601A
Q3085,86	2SB709A	TRANSISTOR	2	2SB0709A
Q3301-09	2SD601A	TRANSISTOR	9	2SD0601A
Q3351,52	2SD601A	TRANSISTOR	2	2SD0601A
Q3353	2SB709A	TRANSISTOR	1	2SB0709A
Q3354-58	2SD601A	TRANSISTOR	5	2SD0601A
Q3359	2SB709A	TRANSISTOR	1	2SB0709A
Q3501-03	2SD601A	TRANSISTOR	3	2SD0601A
Q3507	2SB709A	TRANSISTOR	1	2SB0709A (HZ)
Q3507	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3508	2SB709A	TRANSISTOR	1	2SB0709A (HZ)
Q3508	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3509	2SB709A	TRANSISTOR	1	2SB0709A (HZ)
Q3509	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3513	2SD601A	TRANSISTOR	1	2SD0601A
Q3514	2SB709A	TRANSISTOR	1	2SB0709A
Q3515	2SD601A	TRANSISTOR	1	2SD0601A
Q3516	2SB709A	TRANSISTOR	1	2SB0709A
Q3531,32	2SD601A	TRANSISTOR	2	2SD0703A 2SD0601A
Q3801,02	2SB709A	TRANSISTOR	2	2SB0709A
Q3803,04	2SD601A	TRANSISTOR	2	2SD0709A 2SD0601A
Q3805-07	2SB709A	TRANSISTOR	3	2SB0709A
Q3808	2SD601A	TRANSISTOR	1	2SD0709A 2SD0601A
Q3809	2SK198R	FET	1	2SK01980R
Q3810	2SD601A	TRANSISTOR	1	2SD0601A
Q3812,13	2SB709A	TRANSISTOR	2	2SB0709A
Q3815 Q3815	2SB709A 2SB709A	TRANSISTOR	1	2SB0709A 2SB0709A
	2SB709A 2SB709A	TRANSISTOR	1	
Q3817 Q6401			+	2SB0709A
Q6401	2SK620	FET	1	2SK0620
Q6451	B1BBCJ000003	TRANSISTOR	1	2607004
Q6452	2SB709A	TRANSISTOR	1	2SB0709A
Q6453	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6454	2SD814A	TRANSISTOR	1	
Q6471	B1BBCJ000003	TRANSISTOR	1	
Q6472	2SB709A	TRANSISTOR	1	2SB0709A
Q6474	2SD814A	TRANSISTOR	1	
Q6476,77	2SD601A	TRANSISTOR	2	2SD0601A

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6491,92	2SC1473A	TRANSISTOR	2	2SC1473AE
Q6511,12	B1DFGL000005	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	2SD0601A
Q6521	FS7VS14AT11	FET	1	
Q6522-29	2SK2993	FET	8	
Q6530	2SB1073001TV	TRANSISTOR	1	
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542-49	B1DFHM000002	TRANSISTOR	8	
Q6550	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6551	2SD601A	TRANSISTOR	1	2SD0601A
Q6552	FS7VS14AT11	FET	1	
Q6553	2SB1073001TV	TRANSISTOR	1	
Q6555	FS7VS14AT11	FET	1	
Q6581	2SD601A	TRANSISTOR	1	2SD0601A
Q6601,02	2SK3652000SB	TRANSISTOR	2	200001A
· · · · · · · · · · · · · · · · · · ·	2SK3652000SB	TRANSISTOR	2	
Q6605,06		111111111111	1	
Q6611	2SD2185	TRANSISTOR	-	
Q6612	2SB1073001TV	TRANSISTOR	1	
Q6613	2SD2185	TRANSISTOR	1	-
Q6614	2SB1073001TV	TRANSISTOR	1	
Q6621	2SK3637000VE	TRANSISTOR	1	
Q6624	2SK3637000VE	TRANSISTOR	1	
Q6641,42	B1DFHM000002	TRANSISTOR	2	
Q6671	2SB940A	TRANSISTOR	1	2SB0940AJ
Q6672	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6673	2SD1263A	TRANSISTOR	1	
Q6701,02	2SK3652000SB	TRANSISTOR	2	
Q6705,06	2SK3652000SB	TRANSISTOR	2	
Q6711	2SD2185	TRANSISTOR	1	
Q6712	2SB1073001TV	TRANSISTOR	1	
Q6713	2SD2185	TRANSISTOR	1	
Q6714	2SB1073001TV	TRANSISTOR	1	
Q6721	2SK3637000VE	TRANSISTOR	1	
Q6724	2SK3637000VE	TRANSISTOR	1	
Q6741,42	B1DFHM000002	TRANSISTOR	2	
Q6745,46	2SK326800L	FET	2	
Q6751	2SD1264	TRANSISTOR	1	2SD12640J
Q6752,53	2SC1473	TRANSISTOR	2	2SC14730E
Q6755,56	2SD601A	TRANSISTOR	2	2SD0601A
Q7201,02	2SB709A	TRANSISTOR	2	2SB0709A
Q8021	2SD601A	TRANSISTOR	1	2SD0601A
Q9350	2SK620	FET	1	2SK0620
Q9500,02	2SD601A	TRANSISTOR	2	2SD0601A
Q9501	2SK620	FET	1	2SK0620
Q9502	2SD601A	TRANSISTOR	1	2SD0601A (D2)
Q9502	2SK620	FET	1	2SK0620 (D1)
Q9504	2SK620	FET	1	2SK0620
Q9701-03	2SD601A	TRANSISTOR	3	2SD0601A
Q9904	2SD601A	TRANSISTOR	1	2SD0601A
			<del>  '</del>	
R081	TAJAAH0470JV	M 47 OHM,J,1/16W	1	D0GB470JA006
R082	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	200277007000
1002	L133GL 13224	17. 220KOTHN,3,1/10VV	'	
R083	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R088	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R091,92	TAJAAH0470JV	M 47 OHM,J,1/16W	2	D0GB470JA006
R093,94	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R501,02	TARAFR06R8JC	F 6.8 OHM, J, 7W	2	Δ
R503	ERG2FJS223D	M 22KOHM, J, 2W	1	
R504	ER0S2CKF2203	M 220KOHM, F,1/4W	1	
R505	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R506	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R507	ERDS2TJ561	C 560 OHM, J,1/4W	1	
R508	ER0S2CKF2203	M 220KOHM, F,1/4W	1	
R509	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R510,11	ERDS2TJ332	C 3.3KOHM, J,1/4W	2	
R512,13	ERDS1FJ681	C 680 OHM, J,1/2W	2	
R514	ERDS2TJ182	C 1.8KOHM, J,1/4W	1	
R515	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R516	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R517	ERDS2TJ152	C 1.5KOHM, J,1/4W	1	
R518	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R519	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R520	ERDS2TJ152	C 1.5KOHM, J,1/4W	1	
R521	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R522	ERDS2TJ182	C 1.8KOHM, J,1/4W	1	
R523	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R524	ERG3FJS473D	M 47KOHM, J, 3W	1	
R525	ERX1FJSR22D	M0.22 OHM, J, 1W	1	
R526	ERG3FJS473D	M 47KOHM, J, 3W	1	
R527	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R529	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R531	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R534	ERG2FJS223D	M 22KOHM, J, 2W	1	
R536	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R601	ER0S2CKF1213	M 121KOHM, F,1/4W	1	
R602	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R603	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R604	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R605	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R606	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R607,08	ERDS2TJ222	C 2.2KOHM, J,1/4W	2	
R609,10	ER0S2CKF1803	M 180KOHM, F,1/4W	2	1
R612	ERDS2TJ273	C 27KOHM, J,1/4W	1	1
R613	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R614	ER0S2CKF1002	M 10KOHM, F,1/4W	1	1
R615	ER0S2CKF4642	M46.4KOHM, F,1/4W	1	1
R616	ER0S2CKF4992	M49.9KOHM, F,1/4W	1	EROS2CKF4992
R617	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R618	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R619	ER0S2CKF4992	M49.9KOHM, F,1/4W	1	EROS2CKF4992
R620	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R621	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
R622	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R623	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R624	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R625,26	ERG2FJS471D	M 470 OHM, J, 2W	2	2.10020111 2001
R627	ERDS2TJ102	C 1KOHM, J,1/4W	1	+

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R628	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R629	ERDS1FJ471	C 470 OHM, J,1/2W	1	
R630	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R631	ERDS1FJ220	C 22 OHM, J,1/2W	1	
R632,33	ERDS2TJ682	C 6.8KOHM, J,1/4W	2	
R634	ERDS2TJ332	C 3.3KOHM, J,1/4W	1	
R635	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R636	ERDS2TJ151	C 150 OHM, J,1/4W	1	
R637	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R638	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R639	ER0S2CKF1501	M 1.50KOHM, F,1/4W	1	EROS2CKF1501
R640	ER0S2CKF3741	M3.74KOHM, F,1/4W	1	
R641	ER0S2CKF3830	M 383 OHM, F,1/4W	1	
R642	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R643	ER0S2CKF6192	M61.9KOHM, F,1/4W	1	
R644	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R645	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R646	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R647	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R648	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R649	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R650	ERDS2TJ470	C 47 OHM, J,1/4W	1	
R651	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R652	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R653	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R654	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R656	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R657	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R658	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R659	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R660	ERDS1TJ221	C 220 OHM, J,1/2W	1	
R661	ERDS1TJ391	C 390 OHM, J,1/2W	1	
R662	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R663	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R664	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R665	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R666,67	ERDS1FJ224	C 220KOHM, J,1/2W	2	
R668	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R900,01	ERC12ZGK105	S 1MOHM, K,1/2W	2	Δ
R1554,55	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2301	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2304	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2305,06	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R2309	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2310	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2319,20	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2322,23	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2324,25	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2326	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2327	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R2328	ERJ6GEYJ683	M 68KOHM,J,1/10W	1	
R2329,30	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	2	
R2331	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2332	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2333	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2334	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2335,36	ERJ6GEYJ123	M 12KOHM,J,1/10W	2	
R2337,38	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2341	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2343	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2346	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2347	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2348	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2349,50	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2408	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2410	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2431	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2434	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2438	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2439	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2440	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2441	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2445	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2448	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2450	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2452	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2453	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2456	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2457	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R2460	ERJ6ENF1802	M 18KOHM, 1/10W	1	
R2461,62	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R2463	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R2464	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2466	ERJ6GEYJ104		1	
		M 100KOHM,J,1/10W		
R2467	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2468	ERJ6GEYJ472	M 4.7KOHM, J,1/10W	1	
R2469	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2470	ERJ6GEYJ472	M 4.7KOHM, J,1/10W	1	
R2471	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2472	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2473	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2476,77	ERJ6GEYJ220	M 22 OHM,J,1/10W	2	
R2480	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2481,82	ERJ6GEYJ153	M 15KOHM,J,1/10W	2	
R2483	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2484	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3001-04	ERJ3GEYJ560	M 56 OHM, J, 1/16W	4	
R3007	ERJ3GEYJ560	M 56 OHM, J, 1/16W	1 7	
R3009-15	ERJ3GEYJ560	M 56 OHM,J,1/16W	7	
R3016-21	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3022,23	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3024-29	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3030,31	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3032,33	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R3034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3036	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3037	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3038	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3039-43	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R3045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3046	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3047	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3078	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3079	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3087,88	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3101-08	ERJ3GEYJ334	M 330KOHM,J,1/16W	8	D0GB334JA002
R3109	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3301	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3303	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3304,05	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3306	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
R3307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3308	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
R3309	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3310	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3311	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3312	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R3313	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3314	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R3315	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3316-18	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3319-21	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	DOODTOTOAGGO
R3322	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3323	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	DOGBIOTOAGGO
R3324	ERJ6GEYJ101		1	
		M 100 OHM, J,1/10W	3	DOCD404 IA006
R3325-27	TAJAAH0101JV	M 100 OHM,J,1/16W	_	D0GB101JA006
R3328-31	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	DOODAGA IAGOS
R3332,33	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3334	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3335	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3336	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3337	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3338,39	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R3340	ERJ6ENF9310	M 931 OHM, 1/10W	1	
R3341	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3342	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3343	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3344	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3345	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3346-48	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3349,50	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3351,52	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3353-55	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3356,57	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3358-61	TAJAAH0101JV	M 100 OHM,J,1/16W	4	D0GB101JA006
R3362,63	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3364	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3365	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3366,67	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3368	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3369-72	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3373,74	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3375-77	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3378,79	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	
R3380-82	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R3383-85	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3386,87	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3388	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3389,90	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3391	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3392	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3393,94	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	
R3395	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3396	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	200210101000
R3400	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3501-03	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3504	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
			1	
R3505	ERJ3GEYJ103	M 10KOHM,J,1/16W		
R3506	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3507	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	(117)
R3508	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	(HZ)
R3508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3509	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	(HZ)
R3509	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3510,11	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	(HY)
R3511	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006 (HZ)
R3513,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3516,17	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3518-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R3526-28	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3529,30	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3532-34	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R3535,36	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
R3537	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(HX)
R3537	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	(HZ)
R3538	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(HZ)
R3538	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(HX)
R3539,02	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3540	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3541	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3547	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3548	ERJ6ENF7500	M 750 OHM, 1/10W	1	(HZ)
R3548	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	(HX)
R3549,50	ERJ6ENF1001	M 1KOHM, 1/10W	2	, ,
R3577	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3578	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3579	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3580	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
			1	
R3581	ERJ6GEYJ153	M 15KOHM,J,1/10W		
R3582	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3585,86	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3589	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3590	ERJ6GEYJ560	M 56 OHM,J,1/10W	1	
R3595-97	ERJ6GEYJ102	M 1KOHM,J,1/10W	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3599	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3603,04	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3611-14	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	4	
R3626-29	ERJ6GEYJ3R3	M 3.3KOHM,J,1/10W	4	
R3653	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3654	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3655	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3656	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3663,64	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3668	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3755,56	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3764-66	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
		<del></del>	+ -	
R3776,77	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3778	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3801,02	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3803,04	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R3805	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3806	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3808	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3809	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3810	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3811	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3812	ERJ6ENF3300	M 330 OHM, 1/10W	1	
R3813	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
R3814	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R3815	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3816	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3817	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3818	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3819	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3820	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R3821	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R3822	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3823	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3824	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3825	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3826	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3827	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3828	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3829	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3830,31	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3832	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3833	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3834	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3835	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3836	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3837-40	EXB38V471J	RESISTOR ARRAY	4	
R3841	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3842	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3843	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3845	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3846	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3848	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
				·

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3849	ERJ6ENF3000	M 300 OHM, 1/10W	1	
R3850	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3851	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3852	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R3853	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3854	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3855	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3856	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3857	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3858	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3859	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R3860	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	D0GB391JA002
R3861	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R3862	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3863,64	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R3865	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3866	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R3867-69	TAJAAH0101JV		3	D0GB101JA006
		M 100 OHM,J,1/16W	-	DUGD IU IJAUU0
R3870	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R3871	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	DOODESS IACOS
R3872	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R3873	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3874	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3875,76	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	2	
R3877	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3879	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3881	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3884-86	TAJAAH0820JV	M 82 OHM,J,1/16W	3	D0GB820JA006
R3887	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3888	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3890	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3891	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3892	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3893	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3894	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3895	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4521	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4525	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4551	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4552	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4560	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4561	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4601	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4604	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R6401-08	ERJ6GEYJ221	M 220 OHM,J,1/10W	8	
R6409	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
			2	
R6410,11	ERJ6GEYJ104	M 100KOHM,J,1/10W		
R6412	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6413	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6420-23	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6424	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6425-28	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6429	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6441	ERJ6ENF7502	M 75KOHM, 1/10W	1	
R6442	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6443	EVMEASA00B24	CONTROL 20KOHMB 0.3W	1	
R6444	ERJ6GEYJ272	M 2.7KOHM,J,1/10W	1	
R6445	ERJ6ENF2551	M2.55KOHM, 1/10W	1	
R6447	ERG2FJS223D	M 22KOHM, J, 2W	1	
R6448	ERG2FJS472D	M 82KOHM, J, 3W	1	
R6453	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6454	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6455	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6456	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R6457,58	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6459-61	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R6462	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R6463	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6464	ERG2FJS273D	M 27KOHM, J, 2W	1	
R6465	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6466	ERJ14YJ101	M 100 OHM, J,1/4W	1	
R6467,68	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6469	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6470	ERJ6GEYJ273	M 27KOHM,J,1/10W	1	
R6471	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6473	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6474	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6475	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6476	ERJ6GEYJ394	M 390KOHM,J,1/10W	1	
R6477	EVMEASA00B33	CONTROL 3KOHMB 0.3W	1	
R6478	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6479,80	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6482	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6483	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6484	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6485,86	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6489	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6491	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6492,93	ERJ6ENF2203	M 220KOHM, 1/10W	2	
R6494	ERJ12YJ102	M 1KOHM,J, 1/2W	1	
R6497	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6498,99	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6500-02	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	3	
		M 1KOHM,J,1/10W	2	
R6503,04	ERJ6GEYJ102	· · · · · · · · · · · · · · · · · · ·		
R6505-07	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6509	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6510	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6511	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6512	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6513	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6514	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6515	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6516	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6518	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6521	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6522	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6524	ERJ6GEYF222	M 2.2KOHM,F,1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6527,28	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6529	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6530-37	ERJ6GEYJ470	M 47 OHM,J,1/10W	8	
R6538	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6539	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6540	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6541	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6542-49	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	8	
R6550	ERG1FJS332D	M 3.3KOHM, J, 1W	1	
R6551-53	ERJ6ENF1003	M 100KOHM, 1/10W	3	
	ERJ6ENF1003	·	1	
R6554		M 10KOHM, 1/10W		
R6555	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6556	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R6558	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6560,61	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6563	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6565	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6566	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6567	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6568	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6570	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6571-78	ERJ6GEYJ471	M 470 OHM,J,1/10W	8	
R6582,83	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6584	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6586	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6587	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6589	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6591	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6592,93	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6594	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6595,96	ERJ6ENF5231	M5.23KOHM, 1/10W	2	
R6601	ERD25V0T	M OHM, 1/10W	1	
R6605-07	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6611-14	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	4	
R6619,20	ERJ6GEYJ240	M 24 OHM,J,1/10W	2	
R6623	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6624	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6625	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6626	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6627,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6630-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	200210104000
			_	
R6636-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6641,42	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	2	
R6643,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6655	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6656	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6661,62	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6667,68	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6669	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6670	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R6671	ERG3FJS821D	M 820 OHM, J, 3W	1	
R6672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6673	ERG1SJ100P	M 10 OHM, J, 1W	1	
R6678,79	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R6680,81	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6682-85	ERJ3GEYJ471	M 470 OHM,J,1/16W	4	
R6686-89	ERJ3GEYJ473	M 47KOHM,J,1/16W	4	
R6690,91	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R6692,93	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6694-96	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6697-99	ERJ3GEYJ473	M 47KOHM,J,1/16W	3	
R6701	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6702	ERD25V0T	M OHM, 1/10W	1	
R6711-14	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	4	
R6719,20	ERJ6GEYJ240	M 24 OHM,J,1/10W	2	
R6723	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6724	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6725	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6726	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6727,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6730-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	1
R6736-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6741,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6743,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R6747,48	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6759,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6761	ERJ12YJ470	M 47 OHM, J,1/2W	1	
R6762-64	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6765	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6766-68	ERJ6GEYJ223	M 22KOHM,J,1/10W	3	
R6769,70	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6771,72	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6771,72 R6773	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R6774 P6777 78				
R6777,78	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6779,80	ERJ6GEYJ101	M 100 OHM, J,1/10W	2	D0CB404 14000
R6783	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6784	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6785,86	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	D00B404 14000
R6787,88	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6790	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
0.0704	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6791 R6801-03 R6804-06	ERJ3GEYJ471 ERJ3GEYJ223	M 470 OHM,J,1/16W M 22KOHM,J,1/16W	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6810-12	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6818,19	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6820	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6821	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6823	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6824	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6825	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6826	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6827	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R7101-12	ERJ14YJ220	M 22 OHM, J,1/4W	12	
R7117	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7119	ERJ6ENF1651	M1.65KOHM, 1/10W	1	
R7120	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7126-28	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R7130-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7201-16	ERJ14YJ220	M 22 OHM, J,1/4W	16	
R7201-10	ERJ1413220 ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	+
R7221-24	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R7221-24	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7226-33	ERJ3GEY0R00		8	
R8002	ERJ3GEYJ103	M 0 OHM, 1/16W	1	
R8003	ERJ3GEYJ153	M 10KOHM,J,1/16W M 15KOHM,J,1/16W	1	
R8004	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8006,07	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R8008	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8009	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R8010	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8011	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	DOOD404 LAGOS
R8012	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8013	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	DOOD404 LAGOS
R8015	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8017-19	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R8023,24	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R8025	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R8026	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8027	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R8028-30	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	3	
R8033	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R8035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8036	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	-
R9000	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9008	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9010	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9018-20	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9035	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9036	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9037	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9038	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9039	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9040	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9041	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9046	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9047	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9048	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9049	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9050,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9052	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9053	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9058	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9059	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9060	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9061	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9063	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9064	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9065	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9068-70	ERJ6ENF2701	M 2.7KOHM, 1/10W	3	
R9071-73	ERJ6ENF1800	M 180 OHM, 1/10W	3	
R9076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9077	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9078	ERJ6ENF1800	M 180 OHM, 1/10W	1	
R9080,81	ERJ6ENF1800	M 180 OHM, 1/10W	2	
R9082	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9102,03	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9104	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9105,06	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9107-10	ERJ3GEY0R00	M 0 OHM, 1/16W	4	DOGBIOIDAGG
R9113	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9115	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	DOODTOTOAGGO
R9121-29	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9200,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9204,05	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	ERJ3GEYJ103		2	
R9207,08	TAJAAH0101JV	M 10KOHM,J,1/16W		D0CP404 IA006
R9210		M 100 OHM,J,1/16W	1	D0GB101JA006
R9211,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9228	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9229	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9239,40	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9241	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9242,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9244	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9245	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9246	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9247,48	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9249	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9253	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9254	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9257	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9259	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9261	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9262,63	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R9264-70	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R9271	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9274	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9275	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9285	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9286,87	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9288,89	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R9290	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9291	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R9293	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9300	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9301-05	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R9306,07	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9308	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9309	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9350	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9351	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9352,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9354	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9355,56	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9357	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9358	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9359	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	23021010000
R9360,61	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9362-64	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R9365	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9366-68	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R9369	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	DOGD TO TO AUGU
R9371	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9372-75	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	4	
R9372-73	ERJ3GEYJ560		1	
		M 56 OHM,J,1/16W	1	
R9377	ERJ3GEYJ103	M 10KOHM,J,1/16W		
R9378	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9379	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9380	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9381	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9382	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9383-86	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9387-90	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R9391	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9392	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9394-00	ERJ3GEYJ102	M 1KOHM,J,1/16W	7	
R9401,02	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9403	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9404-06	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R9407,08	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9409	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9410	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9411	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9413	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9414	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9416	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9417	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9418	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9419	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9420	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9421	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9425	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9426	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9427	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9429	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9432	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9434,35	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9436-39	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9440,41	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9442-49	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R9454-58	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9459	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9460,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9464	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9466	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9467	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9469	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9470	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9472,73	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9475	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9478	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9501	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9502-07	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R9514-19	EXB38V680J	RESISTOR ARRAY	6	
R9520,21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9523	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9525,26	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9527-29	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9530-32	EXB38V680J	RESISTOR ARRAY	3	
R9533	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9535-43	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9548	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9549	TAJAAH0680JV	M 68 OHM, J,1/16W	1	D0GB680JA006
R9551	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	2002000A000
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555-58	ERJ3GE17103	M 1 OHM, 1/8W	4	
R9559		M 1.3KOHM, 1/10W	1	
	ERJ6ENF1301	M 1.3KOHM, 1/10W	1	
R9560	ERJ6ENF1001	-	1	
R9561	ERJ3GEY0R00 ERJ3GEYJ105	M 0 OHM, 1/16W M 1MOHM, J, 1/16W	1	
R9562		, , ,		
R9563	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R9564	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9565	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R9566	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9567	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9568,69	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9572	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9573	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9576	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9577	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9578	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9581	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9582-85	ERJ3GEYJ330	M 33 OHM,J,1/16W	4	
R9588	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9601	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9607,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9609	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9616	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9617,18	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9619,20	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9624,25	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9626	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9629	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9630	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9632-34	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R9635-39	ERJ3GEYJ100	M 10 OHM,J,1/16W	5	
R9642-45	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9652	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9654	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9656	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9701	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9702	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9703	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9704-07	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9709	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9710-12	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9714	EXB38V103J	RESISTOR ARRAY	1	
R9715-17	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9718,19	EXB38V103J	RESISTOR ARRAY	2	
R9720	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9722,23	EXB38V103J	RESISTOR ARRAY	2	
R9725	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9726	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9727	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9728	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9729	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9730	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9732	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9742	ERJ3GEYJ332	M 3.3KOHM.J.1/16W	1	
R9743	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9744,45	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9746	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9746 R9747,48	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9747,46 R9749	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9749 R9750	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	DOGDIOIDADOG
	ERJ3GEY0R00		3	
R9755-57		M 0 OHM, 1/16W		
R9758-62 R9765-71	ERJ3GEYJ151	M 150 OHM, J,1/16W	5	
	ERJ3GEYJ151	M 150 OHM,J,1/16W	7	
R9775	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9793-00	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R9801,02	EXB38V103J	RESISTOR ARRAY	2	
R9803-05	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9806	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9809-11	ERJ3GEY0R00	M 0 OHM, 1/16W	3	1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9814	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9816-18	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9819	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9821	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9823-28	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9831	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9832,33	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9836,37	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9838	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9839,40	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9841	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9842,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9844-46	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R9851-71	EXB38V470J	RESISTOR ARRAY	21	
R9872-76	TAJAAH0470JV	M 47 OHM,J,1/16W	5	D0GB470JA006
R9877	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9878	EXB38V151J	RESISTOR ARRAY	1	
R9879,80	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9881	EXB38V680J	RESISTOR ARRAY	1	
R9882	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9884-88	TAJAAH0470JV	M 47 OHM,J,1/16W	5	D0GB470JA006
R9890	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9902,03	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9910	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9911	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9912	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9913,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9916	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9917	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9920	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9921	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9927	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9929	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	, , , , , , , , , , , , , , , , , , , ,
R9930	EXB38V103J	RESISTOR ARRAY	1	
R9931,32	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9933-38	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9939	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9940,41	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9942	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9944	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9945,46	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9947	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	23021010000
R9948	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9949	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9949 R9950	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
	+			DOGRADA IADOS
R9951,52	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9954,55	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9958	ERJ3GEYJ474	M 470KOHM, J,1/16W	1	
R9959	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R9960	ERJ6ENF1002	M 10KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9965	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9966	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9967,68	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9977	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9978,79	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9980	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
RL501	TSEH0025	RELAY	1	K6B2AGA00020 🗥
RL502	K6B1AGA00086	RELAY	1	Δ
RM001	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNPA2542	CIRCUIT BOARD C1	1	A
DTI	TNPA2543	CIDCUIT DOADD C2	-	<del>-</del>
RTL		CIRCUIT BOARD C2	1	<u> </u>
RTL	TNPA2626	CIRCUIT BOARD SU	1	Δ
RTL	TNPA2627	CIRCUIT BOARD SD	1	⚠
RTL	TNPA2249	CIRCUIT BOARD H3	1	Δ
RTL	TXN/F10MMSA	CIRCUIT BOARD F	1	Δ
RTL	TNPA2590	CIRCUIT BOARD Z	1	Δ
RTL	TZTNP01MMSB	CIRCUIT BOARD D1	1	Δ
RTL	TNPA2589	CIRCUIT BOARD D2	1	Δ
RTL	TNPA2598AB	CIRCUIT BOARD P	1	Δ
RTL	TNPA2534AB	CIRCUIT BOARD SC	1	Δ
RTL	TNPA2535AB	CIRCUIT BOARD SS	1	Δ
RTL	TNPA2538	CIRCUIT BOARD SS4	1	Δ
RTL	TNPA2539	CIRCUIT BOARD SS5	1	Δ
RTL	TNPA2622	CIRCUIT BOARD S1	1	A
RTL	TNPA2621	CIRCUIT BOARD V1	1	A
RTL	TZTNP010JBS	CIRCUIT BOARD HX	1	A
RTL	TXNHZ30KHS	CIRCUIT BOARD HZ	1	⚠
S061	TSE4GD0001	POWER SWITCH	1	K0F162B00002
S1554-56	EVQPBD05R	SWITCH	3	
SC2	K1KA06A00180	6P CONNECTOR	1	
SC20	K1KA08A00232	8P CONNECTOR	1	
SC21	K1KA11A00078	11P CONNECTOR	1	
SC23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SC41-44	K1KB40B00015	40P CONNECTOR	4	
SD1-D3	K1MN80B00004	80P CONNECTOR	3	
SS11	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
SS12	K1KA05A00139	5P CONNECTOR	1	
SS23	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
SS34	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SS40A	K1KB07A00037	7P CONNECTOR	1	

Def No	Dort No.	Dart Name & Description	Dan	Domorko
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
SS41A-6A	TJSF41013	13P CONNECTOR	6	K1MN13B00020
SS47A	K1KB07A00037	7P CONNECTOR	1	
SS48,49	K1KA07A00170	7P CONNECTOR	2	
SU1-U3	K1MN80B00004	80P CONNECTOR	3	
T501	G4D4A0000049	SWITCHING TRANSFORMER	1	Δ
T502	G4D4A0000050	SWITCHING TRANSFORMER	1	Δ
T503	ETS25AD1C3AG	SWITCHING TRANSFORMER	1	⚠
T6451	G4D1A0000055	SWITCHING TRANSFORMER	1	
T6471	G4D1A0000055	SWITCHING TRANSFORMER	1	
V34	K1KA08B00005	8P CONNECTOR	1	
X3801	H0J202500002	CRYSTAL	1	
X9200	H1A3305B0005	CRYSTAL	1	
X9350	TSSA120	CRYSTAL	1	H0J327200038
X9450	TSSA081	CRYSTAL	1	H0J245500024
X9451	TSS9038-B	CRYSTAL	1	H0J200500016
X9601	H1A5005B0015	CRYSTAL	1	
X9602	H1A6505B0004	CRYSTAL	1	
X9603	H1A6005B0008	CRYSTAL	1	
X9701	TSS9038-B	CRYSTAL	1	H0J200500016
X9901	H0J921400003	CRYSTAL	1	
Z3	TJS1A8090	PHONO PIN (3P)	1	K1KA03B00045
Z4	TJS1A8100	PHONO PIN (4P)	1	K1KA04B00056
Z6	TJS1A8830	CONNECTOR	1	K1KA07A00056
Z10	TJS1A8800	4P CONNECTOR	1	K1KA04A00242
Z17	TJS1A8840	8P CONNECTOR	1	K1KA08A00221

## 17.5. 37 inch Models (Except UZ Version) Electrical Replacement List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C11	K1MN80B00002	CONNECTOR	1	
C12	K1MN20B00043	CONNECTOR	1	
C21	K1MN80B00002	CONNECTOR	1	
C22	K1MN20B00043	CONNECTOR	1	
C23	K1KA11A00102	11P CONNECTOR	1	
C24	K1KA08A00232	8P CONNECTOR	1	
C081	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C402	ECA1EHG101	E 100UF, 25V	1	
C410-12	ECKDAE472ZE	C 4700PF, Z,	3	Δ
C413	ECA2WHG100	E 10UF, 450V	1	
C415	ECA1HHG220	E 22UF, 50V	1	
C416	ECQV1H104JM	P 0.1UF, J, 50V	1	
C417	ECKD3D392KBP	C 3900PF, K, 2KV	1	
C418	ECA1EHG470	E 47UF, 25V	1	
C419	ECKD2H821KB2	C 820PF, K,500V	1	ECKD2H821KB5
C420	ECQV1H104JM	P 0.1UF, J, 50V	1	
C421	ECA1EHG470	E 47UF, 25V	1	
C422,23	ECKD2H561KB2	C 560PF, K,500V	2	
C424	EEUFC1C471	E 470UF, 16V	1	
C425	ECA1EHG102	E 1000UF, 25V	1	
C427	ECA1AHG471	E 4700UF, 10V	1	
C428	ECA1EHG470	E 47UF, 25V	1	
C429,30	ECKF1H223ZF	C 0.022UF, Z, 50V	2	
C429,30 C431-33	ECKDAE472ZE	C 4700PF, Z,	3	A
				Δ
C434	ECQE6105JF	P 1UF, J,630V	1	
C435	EEUFC1V331	E 220UF, 35V	1	
C436	ECQB1H103JF	P 0.01UF, J, 50V	1	
C437	ECQB1H821KF	P 820PF, K, 50V	1	
C438	EEUFC1H330	E 33UF, 50V	1	
C439	ECQB1H101KF	P 100UF, K, 50V	1	
C440	ECQB1H331JF	P 330UF, K, 50V	1	ECQB1H331JF3
C441	ECQB1H103JF	P 0.01UF, J, 50V	1	
C442	ECQB1H104JF	P 0.1UF, J, 50V	1	
C443	ECQV1H564JM	P 0.56UF, J, 50V	1	ECQV1H564JL
C444	ECA1HHG010	E 1UF, 50V	1	
C445	ECKD3D101KBP	C 100PF, K, 2KV	1	
C447,48	EETHC2W331L	E 330UF, 450V	2	
C449	ECQB1H104JF	P 0.1UF, J, 50V	1	
C450	ECA1EHG331	E 330UF, 25V	1	
C452	EEUEB1H220	E 22UF, 50V	1	
C501	ECA1HHG100	E 10UF, 50V	1	
C503	ECQB1H103JF	P 0.01UF, J, 50V	1	
C504	ECKF1H101KB	C 100PF, K, 50V	1	
C505	ECQB1H102JF	P 1000PF, J, 50V	1	
C506	ECQB1H122JF	P 1200PF, J, 50V	1	
C508	ECQB1H102JF	P 1000PF, J, 50V	1	
C509	ECKF1H471KB	C 470PF, K, 50V	1	
C510	ECKD3D221KBP	C 220PF, K, 2KV	1	
C511	ECA1EHG221	E 220UF, 25V	1	
C512	ECQB1H102JF	P 1000PF, J, 50V	1	
C513	EEUEB1E101	E 100UF, 25V	1	
0010	LLOLDILIOI	L 10001 , 23 V		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C515,16	ECQE6473KF	P 0.047UF, K,630V	2	
C518	ECA1EHG101	E 100UF, 25V	1	
C520	EEUEB1E221SB	E 220UF, 25V	1	
C521	ECQB1H103JF	P 0.01UF, J, 50V	1	
C523	ECKCNA102MBM	C 1000PF, Z,	1	ECKDNA102MB
C524	ECKD3D102KBP	C 1000PF, K, 2KV	1	
C525	EETHC2C821B	E 820UF, 160V	1	
C526	ECKD3A101KBP	C 100PF, K, 1KV	1	
C527,28	ECKF1H103ZF	C 0.01UF, Z, 50V	2	
C530	ECKD3A101KBP	C 100PF, K, 1KV	1	
C531	ECKD2H103ZU	C 0.01UF, Z,500V	1	
C532	EETHC2D182L	E 1800UF, 200V	1	
C533	ECKD3A471KBP	C 470PF, K, 1KV	1	
C534,35	ECQB1H103JF	P 0.01UF, J, 50V	2	
C536	EETHC2D182L	E 1800UF, 200V	1	
C537,38	ECKD3A101KBP	C 100PF, K, 1KV	2	
C539	EEUEB1H220	E 22UF, 50V	1	
C540	ECA1EHG472	E 4700UF, 25V	1	
C541	ECA1EHG222	E 2200UF, 25V	1	
C542,43	ECQB1H103JF	P 0.01UF, J, 50V	2	
C544-46	ECA1EHG222	E 2200UF, 25V	3	
C547	ECQB1H103JF	P 0.01UF, J, 50V	1	
C548	ECQB1H332JF	P 3300PF, J, 50V	1	
C549,50	EEUFC1V151	E 150UF, 35V	2	
C551	EEUFC0J122	E 1200UF, 6.3V	1	
C552	ECQV1H105JM	P 1UF, J, 50V	1	
C553-55	ECKF1H103ZF	C 0.01UF, Z, 50V	3	
C556	ECA1EHG471	E 470UF, 25V	1	
C557	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C558	ECA1HHG101	E 100UF, 50V	1	
C559	ECA1EHG101	E 100UF, 25V	1	
C560	ECKF1H103ZF	C 0.01UF, Z, 50V	1	
C561	ECA1EHG101	E 100UF, 25V	1	
C562-65	ECKF1H103ZF	C 0.01UF, Z, 50V	4	
C566	ECA1EHG101	E 100UF, 25V	1	
C900,01	ECQU2A224BN9	P 0.22UF, 250V	2	A
C902	ECQU2A105BN9	P 1UF, 250V	1	A
C903-06	ECKCNA221KB7	C 220PF	4	⚠
C2312	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2313	ECA1HHG470	E 47UF, 50V	1	
C2314	EEVHB1C470	E 47UF, 16V	1	
C2316,17	ECQV1H474JM	P 0.47UF, J, 50V	2	
C2318,19	ECJ2XC1H561J	C 560PF, J, 50V	2	
C2320-22	ECJ2VF1H104Z	C 0.1UF, Z, 50V	3	
C2323	ECA1HHG221	E 220UF, 50V	1	
C2324	ECJ2VF1H104Z	C 0.1UF, Z, 50V	1	
C2325	ECA1HHG221	E 220UF, 50V	1	
C2326,27	ECJ2XC1H221J	C 220PF, J, 50V	2	
C2328,29	ECJ2VF1H104Z	C 0.1UF, Z, 50V	2	
C2330	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2331	ECJ2XC1H101J	C 100PF, J, 50V	1	
C2332	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C2333	ECJ2XC1H101J	C 100PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2334,35	TCUY1C225KBM	C 2.2UF, 16V	2	F1K1C225A026
C2336,37	ECJ2XB1H473K	C 0.047UF, K, 50V	2	
C2338,39	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2340-43	ECJ2VF1H104Z	C 0.1UF, Z, 50V	4	
C2344-47	EEUGZ1D102SB	E 1000UF, 20V	4	
C2348	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2349,50	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2417	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C2419	EEVHB1C100	E 10UF, 16V	1	
C2422	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C2423	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2426	ECJ2XB1H153K	C 0.015UF, K, 50V	1	
C2427	EEVHB1C100	E 10UF, 16V	1	
C2429	EEAGA1C101	E 100UF, 16V	1	
C2431	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C2433	ECJ2XB1H393K	C 0.039UF, K, 50V	1	
C2434	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C2435	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2436	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2437,38	EEAGA1C101	E 100UF, 16V	2	
C2440,41	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C2442	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2450	EEVHB1C100	E 10UF, 16V	1	
C2450 C2451	EEVHB1E4R7	E 4.7UF, 25V	1	
C2451	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2452 C2453	ECJ2XB1H302K ECJ2VF1H104Z		1	
C2453	EEVHB1E4R7	C 0.1UF, Z, 50V	1	
	+	E 4.7UF, 25V	1	
C2457	EEVHB1E4R7	E 4.7UF, 25V	_	
C2458	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2459	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C2460	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2461	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C2463	ECJ2XB1H473K	C 0.047UF, K, 50V	1	
C2466,67	ECJ3VB1C104K	C 0.10UF, K, 16V	2	
C2480	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C2484	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3001-03	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3004	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3005-07	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3008,09	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3010-12	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3013,14	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3015-17	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3018	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3019	EEVHB1C470	E 47UF, 16V	1	
C3020	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3021	EEVHB1C470	E 47UF, 16V	1	
C3022	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3023	EEVHB1C470	E 47UF, 16V	1	
C3024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C3026	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3027	EEVHB1C470	E 47UF, 16V	1	
C3028	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3029	EEVHB1C470	E 47UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3030,31	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C3032	EEVHB1C470	E 47UF, 16V	1	
C3033-35	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C3036	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3037-39	EEVHB1C470	E 47UF, 16V	3	
C3040,41	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3042	EEVHB1C470	E 47UF, 16V	1	
C3049,50	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C3301,02	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C3303,04	EEVHB1C470	E 47UF, 16V	2	
C3305	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3306,07	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3309	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3310	EEVHB1C470	E 47UF, 16V	1	
C3311	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3312,13	EEVHB1C470	E 47UF, 16V	2	
C3314	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3351,52	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3351,52	ECJ2VF1C105Z	C 1UF, Z, 16V	8	
C3361	EEVHB1C470	E 47UF, 16V	1	
C3362	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3363	EEVHB1C470	E 47UF, 16V	1	
C3364	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3365	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3404	ECJ2VF1C104Z		1	
C3404 C3405	EEVHB1C470	C 0.1UF, Z, 16V E 47UF, 16V	1	
C3405	ECJ2VF1C104Z	-	1	
		C 0.1UF, Z, 16V	1	
C3407	EEVHB1C470	E 47UF, 16V		
C3409	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3410	EEVHB1C470	E 47UF, 16V	1	
C3501	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3502	EEVHP1E220	E 22UF, 25V	1	
C3503,04	EEVHP1E100	E 10UF, 25V	2	
C3505	ECJ2VF1C105Z	C 1UF, Z, 16V	1	E41/0 1005 4000
C3506	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C3507	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3509-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3516-18	EEVHB1C470	E 47UF, 16V	3	
C3520	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3521	EEVHB1C470	E 47UF, 16V	1	
C3523	EEVHB1C470	E 47UF, 16V	1	
C3524	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3529-31	ECJ3XB0J106M	C 10UF, M,6.3V	3	
C3533,34	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3542	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3544	EEVHB1C470	E 47UF, 16V	1	
C3550	ECJ2VF1H103Z	C 0.01UF, Z, 50V	1	
C3551	EEVHB1C470	E 47UF, 16V	1	
C3561,62	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3591,92	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3593	ECJ2VF1E104Z	C 0.1UF, Z, 25V	1	
C3594,95	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C3700	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3701	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3702	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3703	EEVHB1C470	E 47UF, 16V	1	
C3704	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3706	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3708	EEVHB0G221	E 220UF, 4V	1	
C3709	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3710-13	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C3714	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3715	EEVHB0G221	E 220UF, 4V	1	
C3716	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3717,18	EEVHB1C470	E 47UF, 16V	2	
C3723	EEVHB1C470	E 47UF, 16V	1	
C3726	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3727,28	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C3729	ECJ2XB1H471K	C 470PF, K, 50V	1	
C3801	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3802	EEVHB1C470	E 47UF, 16V	1	
C3803	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3804	ECJ1XC1H470J	C 47PF, J, 50V	1	
C3805	ECJ1XC1H220J	C 22PF, J, 50V	1	
C3806	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3808	EEVHP1E220	E 22UF, 25V	1	
C3809	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3810	EEVHB0J220	E 22UF 6.3V	1	
C3812	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3815	EEVHB1C470	E 47UF, 16V	1	
C3816	EEVHP1E100	E 10UF, 25V	1	
C3817	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3818	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3819	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3820	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3821	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3823	EEVHB0J101	E 100UF, 6.3V	1	EEVHB0J101P
C3824,25	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3828,29	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3830,31	ECJ1XC1H180J	C 18PF, J, 50V	2	
C3832-34	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3835	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3836-38	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3840	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3841	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3842	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3843	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3844	EEVHB0J152	E 1500UF, 6.3V	1	
C3845,46	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3848-50	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3852,53	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3854	ECJ1VC1H080C	C 8PF, C, 50V	1	
C3855-57	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C3858	EEVHB0G221	E 220UF, 4V	1	
C3859,60	EEVHB0J152	E 1500UF, 6.3V	2	
C3861	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3862	ECJ1VB1H103K	C 0.01UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3863	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3864	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3865	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3866	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3867	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C3868	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3869	ECJ1XC1H330J	C 33PF, J, 50V	1	
C3870,71	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3872	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3873	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3874	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C3875	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3876	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C3877	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C3878-83	ECJ2VF1C105Z	C 1UF, Z, 16V	6	
C3884	ECJ1VB1H153K	C 0.15UF, K, 50V	1	
	+			
C3885	ECJ2VF1C105Z	C 1UF, Z, 16V	1	E1K0 1225 4002
C3886	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3887	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3888	ECJ1XC1H101J	C 100PF, J, 50V	1	
C3889	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C3890	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C3891,92	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3893	TCUY0J335MBM	C 3.3UF, 6.3V	1	F1K0J335A003
C3894	EEVHB0G221	E 220UF, 4V	1	
C3896	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3897	ECJ1XC1H680J	C 68PF, J, 50V	1	
C3898	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3899	ECJ1XC1H330J	C 33PF, J, 50V	1	
C4518	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C4551	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C6401-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6411	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6412	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6417	ECJ2XB1H221K	C 220PF, K, 50V	1	
C6421	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6422	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6427	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6429	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6431	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6433	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6452	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6453	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6454	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6455	EEUFC1E221	E 220UF, 25V	1	
C6456	ECA2CM101	E 100UF, 160V	1	
C6457	EEUFC1E221	E 220UF, 25V	1	
C6458	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	EEUFC1E221	E 220UF, 25V	1	
C6462,63	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6464,65	ECA2CHG2R2	E 2.2UF, 160V	2	
C6472	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6473	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2AHG470	E 47UF, 100V	1	
C6481-88	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6490,91	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6492	ECA2VHG100	E 10UF, 350V	1	
C6493	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6501-08	TCUY1C105ZFN	C 1UF, 16V	8	F1J1C1050006
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6511,12	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6513	ECA2CM101	E 100UF, 160V	1	
C6521	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6522	EEUFC1E470	E 47UF, 25V	1	
C6524,25	ECJ3FC2D102J	C 1000PF, J,	2	
C6526	ECA2EHG4R7	E 4.7UF, 250V	1	
C6529	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6534	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6540	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6541,42	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6543,44	ECJ3FC2D102J	C 1000PF, J,	2	
C6545	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6546	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6547	ECJ3FC2D102J	C 1000PF, J,	1	1 13101030000
C6550	ECA2AHG470	E 47UF, 100V	1	
C6571,72	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6571,72	TCUY1C105ZFN	•	5	
	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6580,81		C 1UF, 16V	1	F1J1C1050006
C6584	ECJ3YB1E105K	C 1UF, K, 25V		E4 14 C4 0 E 0 0 0 C
C6585	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6598	ECA2CHG220	E 22UF, 160V	1	
C6601-04	F2A2D1510004	E 150UF, 200V	4	
C6607	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6608	EEUFC1E471	E 470UF, 25V	1	
C6611-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6621-28	ECQE2105RKB	P 1UF, 250V	8	
C6631,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6633	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6634,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6636	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6637	EEUFC1E121	E 120UF, 25V	1	
C6638	ECWU1224KC9	P 0.22UF, 100V	1	
C6639	F2A2D1510004	E 150UF, 200V	1	
C6642	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6644	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6645	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6646	EEUFC1E121	E 120UF, 25V	1	
C6647	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6655,56	EEUFC1A101	E 100UF, 10V	2	
C6660-77	ECJ3XK2J102K	C 1000PF, K,630V	18	
C6695,96	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6701-04	F2A2D1510004	E 150UF, 200V	4	
C6707,08	EEUED2C470	E 47UF, 160V	2	
C6711-18	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6721-28	ECQE2105RKB	P 1UF, 250V	8	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6731,32	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6733	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6734,35	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6736	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C6738	ECWU1224KC9	P 0.22UF, 100V	1	
C6739	TACCP2E104MT	C 0.1UF, 250V	1	F1L2E1040002
C6740	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6741,42	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6744	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6745,46	ECJ3YB1E105K	C 1UF, K, 25V	2	
C6747	F2A2D1510004	E 150UF, 200V	1	
C6748	EEUFC1E221	E 220UF, 25V	1	
C6749	ECJ4XB1E475M	C 4.7UF, M, 25V	1	
C6750,51	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C6753,54	EEUFC1E221	E 220UF, 25V	2	
C6755	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6756	EEUFC1A101	E 100UF, 10V	1	
C6760,61	ECJ3XK2J102K	C 1000PF, K,630V	2	
C6771-78	ECJ3XK2J102K	C 1000PF, K,630V	8	
C6781	ECJ3XK2J102K	C 1000PF, K,630V	1	
C6786	ECJ3XK2J102K	C 1000PF, K,630V	1	
C7101	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7102	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C7104-06	TCUY1C105ZFN	C 1UF, 16V	3	F1J1C1050006
C7107	F1K2A1040004	C 0.1UF, 100V	1	
C7113	F1K2A1040004	C 0.1UF, 100V	1	
C7115	F1K2A1040004	C 0.1UF, 100V	1	
C7117	F1K2A1040004	C 0.1UF, 100V	1	
C7131	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7132-34	ECJ3XB0J106M	C 10UF, M,6.3V	3	
C7201	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7202	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C7203-06	TCUY1C105ZFN	C 1UF, 16V	4	F1J1C1050006
C7207	F1K2A1040004	C 0.1UF, 100V	1	1 1010100000
C7210	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C7210	F1K2A1040004	C 0.1UF, 100V	1	
C7213	F1K2A1040004	C 0.1UF, 100V	1	
C7215	F1K2A1040004	C 0.1UF, 100V	1	
C7217	F1K2A1040004	C 0.1UF, 100V	1	
C8001	ECJ1VF1H103Z	C 0.10F, 100V	1	
C8002	EEVHP1E220	E 22UF, 25V	1	
C8003	ECJ1VB1H471K	C 470PF, K, 50V	1	
C8005	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C8007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8007	ECJ3XB0J106M	C 10UF, M,6.3V	1	
	TCUY1C475ZFM	C 4.7UF, 16V	1	E1K1C/750019
C8009			+	F1K1C4750018
C8010	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C8011	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C8012	ECJ1VB1H103K	C 0.01UF, K, 50V	1	
C8013	ECJ3VB1C474K	C 0.47UF, K, 16V	1	
C8014,15	ECJ1VB1H103K	C 0.01UF, K, 50V	2	
C8016	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C8017	EEVHB1C470	E 47UF, 16V	1	
C8018	ECJ1XC1H102J	C 1000PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8019	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C8020	ECJ1XC1H101J	C 100PF, J, 50V	1	
C8021	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9000,01	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9002	EEVHB1C470	E 47UF, 16V	1	
C9003	EEVHB0G221	E 220UF, 4V	1	
C9004	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9005	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9008-10	EEVHP1E220	E 22UF, 25V	3	
C9011	EEVHB1C470	E 47UF, 16V	1	
C9012	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9014	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9015	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9016	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9017-19	ECJ1XC1H030C	C 3PF, C, 50V	3	
C9021-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9021-24	ECJ2VB1E473K	C 0.047UF, K, 25V	2	
C9023,20	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9028	ECJ2VB1E473K	C 0.047UF, K, 25V	1	
C9028	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9031 C9032,33	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	. 110000000000
C9032,33	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9034 C9035	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	1 INGGOGAGG
C9035	ECJ3VB1C104K		1	
C9036 C9037-39	ECJ3VB1C104K	C 0.10UF, K, 16V	3	
C9037-39	ECJ1XF1C1042 ECJ1XB1C393K	C 0.1UF, Z, 16V	1	
		C 0.039UF, K, 16V	1	
C9041	ECJ1VB1H392K	C 3900PF, K, 50V	+	
C9042	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9045	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9048,49	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9054	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9202	EEVHB0J330	E 33UF, 6.3V	1	E41/0 1005 4000
C9203	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9204-06	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9208-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	E41/0 1005 4005
C9213	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9215	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9216	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9217	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9218-20	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	-
C9225,26	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9229	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	-
C9236,37	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9243-46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9255	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9256	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9258-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9261	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9262	ECJ2XB1H153J	OR ECJ2VB1H153K	1	ECJ2VB1H153J
C9263	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C9264	ECJ2VB1E563K	C 0.056UF, K, 25V	1	
C9265	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9266	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9267	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9268	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9269	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9300	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9304,05	EEVHB0G221	E 220UF, 4V	2	
C9306-08	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C9310	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9312	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9314	EEVHB0G221	E 220UF, 4V	1	
C9315	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9316	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9317	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9318	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9319	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9320	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9321	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9353	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9354	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9355	EEVHB1C470	E 47UF, 16V	1	
C9356	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9357	EEVHB1C470	E 47UF, 16V	1	
C9358	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9361-66	ECJ1XC1H101J	C 100PF, J, 50V	6	
C9367	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9368	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9369,70	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9371	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9372	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9373	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9374	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9375	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9377,78	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9379,80	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9381	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9382	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	T TROUGUSAGUS
C9383	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9385	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9387,88	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9390,91	ECJ3XF1C475Z	C 4.7UF, Z, 16V		
C9392	ECJ3XF1C475Z		1	
C9393	+	C 0.1UF, Z, 16V	+	
C9400	EECS5R5V155	E 1.5UF, 5.5V	1	
C9401	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9402,03	ECJ1XC1H150J	C 15PF, J, 50V	2	
C9450	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9451	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9452,53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9454	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9455-60	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9464	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	I
C9465 C9466,67	ECJ1XC1H330J	C 33PF, J, 50V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9469	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9470	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9472	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9501,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9503	EEVHB1C470	E 47UF, 16V	1	
C9504	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9505	EEVHB1C470	E 47UF, 16V	1	
C9506	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9507	F2G0J1010021	E 100UF 6.3V	1	
C9509,10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9551	ECJ1VF1H103Z	C 0.01UF, Z, 50V	1	
C9552,53	TCUY1C105ZFN	C 1UF, 16V	2	F1J1C1050006
C9554	F2G0J1010021	E 100UF 6.3V	1	
C9555,56	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C9557,58	F2G1C4700030	E 47UF, 16V	2	
C9559	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9560	ECJ1XB1H102K	C 0.01UF, K, 50V	1	
C9561,62	F2G1C4700030	E 47UF, 16V	2	
C9563	F2G1C4700030 F2G0J1010021	E 100UF 6.3V	1	
C9564	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9565	EEVHB0G221	E 220UF, 4V	1	
C9566	ECJ1XF1C104Z	· ·	1	
	TCUY0J685MBM	C 0.1UF, Z, 16V	1	F1K0J685A003
C9567		C 6.8UF, 6.3V		FIRUJOOJAUUS
C9570	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9572	EEVHB0G221	E 220UF, 4V	1	
C9573	F2G0J1010021	E 100UF 6.3V	1	
C9574	EEVHB1C470	E 47UF, 16V	1	
C9575,76	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9577	F2G0J1010021	E 100UF 6.3V	1	
C9578	ECJ2XC1H222J	C 2200PF, J, 50V	1	
C9579	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9601	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9602	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1 -	
C9603-07	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9608	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9610	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9611-16	ECJ1XF1C104Z	C 0.1UF, Z, 16V	6	
C9619	ECJ1XC1H101J	C 100PF, J, 50V	1	
C9620-24	ECJ1XF1C104Z	C 0.1UF, Z, 16V	5	
C9625	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9627,28	ECJ1XC1H100D	C 10PF, D, 50V	2	
C9629	ECJ1XC1H331J	C 330PF, J, 50V	1	
C9630	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9631	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9632	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9633,34	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9635	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9701	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9702-05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9706	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9707-10	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9713	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9715	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9716	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9717	ECJ3VB1C104K	C 0.10UF, K, 16V	1	
C9718,19	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9720	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9721,22	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9723	ECJ1XC1H471J	C 470PF, J, 50V	1	
C9724,25	ECJ1VF1H103Z	C 0.01UF, Z, 50V	2	
C9726-28	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9730	EEVHB1C470	E 47UF, 16V	1	
C9731	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9732	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
C9801-03	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9805-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	18	
C9826	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9827	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9828	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9829	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9901,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9903	ECJ1XF1H102Z	C 1000PF, Z, 50V	1	
C9904,05	ECJ1XC1H330J	C 33PF, J, 50V	2	
C9910	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C9911	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9912	EEVHB1C470	E 47UF, 16V	1	
C9913	TCUY1C105ZFN	C 1UF, 16V	1	F1J1C1050006
C9914	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9915	ECJ1VB1C563K	C 0.056UF, K, 16V	1	
C9916	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9918	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9923	TCUY1C225KBM	C 2.2UF, 16V	1	F1K1C225A026
C9925	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9926	TCUY0J685MBM	C 6.8UF, 6.3V	1	F1K0J685A003
CB1-B7	K1MN80B00004	80P CONNECTOR	7	
D1	K1KA50B00064	50P CONNECTOR	1	
D2,D3	K1KA40B00076	40P CONNECTOR	2	
D4	K1KA12B00066	CONNECTOR	1	
D10	K1KA04A00199	CONNECTOR	1	
D12,13	K1KA50A00125	CONNECTOR	2	
D16	K1KA10A00317	10P CONNECTOR	1	
D17	K1KA08A00293	8P CONNECTOR	1	
D20	K1KA08A00232	8P CONNECTOR	1	
D21	K1KA11A00078	11P CONNECTOR	1	
D22,23	K1KA50A00125	CONNECTOR	2	
D25	K1KA11A00102	11P CONNECTOR	1	
D26	K1KA10A00317	10P CONNECTOR	1	
D27	K1KA09A00077	9P CONNECTOR	1	
D31,32	K1MN80B00002	CONNECTOR	2	
D081	LNJ107W5PRW	LED	1	
D082	MA8056M	ZENER DIODE	1	MAZ80560M
D401-03	MA165	DIODE	3	MA2C165
	S1WBA80	DIODE	1	B0EBKT000003 △
D411		i i	1	DOERV   000003
	MAAOOO!	ZENED DIODE	,	
D411 D413 D414	MA4082L D1NL40V70	ZENER DIODE DIODE	1	MAZ40820L B0HALP000002

|- · · · | |- · · · | | - · · | | · · | - · · · | | · · | |

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D416	PC123FY2	PHOTO COUPLER	1	B3PAA000012 🗥
D417	MA4051M	ZENER DIODE	1	MAZ40510M
D418,19	EU02	DIODE	2	
D420	ERA22-04	DIODE	1	B0HAGP000001
D421	ERA15-02	DIODE	1	B0EAKM000016
D422	MA4056M	ZENER DIODE	1	MAZ40560M
D431	B0FBBR000019	DIODE	1	Δ
D432	D1NL20UV70	DIODE	1	B0HAMM000072
D433	MA4270L	ZENER DIODE	1	MAZ42700L
0434	D1NL20UV70	DIODE	1	B0HAMM000072
D436	TVSRM10B	DIODE	1	B0EAKT000009
0438	D5L60F4015	DIODE	1	B0HARR000003
0439	MA4100M	ZENER DIODE	1	MAZ41000M
0440,41	MA4270M	ZENER DIODE	2	MAZ42700M
0442	MA4150M	ZENER DIODE	1	MAZ41500M
0443,44	ERA22-04	DIODE	2	B0HAGP000001
D501	AK04	DIODE	1	B0JAMC000003
D502	B0BA02700021	DIODE	1	
D503	AK04	DIODE	1	B0JAMC000003
0505,06	ERA22-04	DIODE	2	B0HAGP000001
507	TMPG10G3	DIODE	1	B0BA01000046
D508	ERA22-04	DIODE	1	B0HAGP000001
509	TMPG10G3	DIODE	1	B0BA01000046
D510	ERA22-04	DIODE	1	B0HAGP000001
0511,12	RC3B2LFU1	DIODE	2	
D514	ERA22-04	DIODE	1	B0HAGP000001
0515,16	PC123FY2	PHOTO COUPLER	2	B3PAA000012 🗥
D517	FMLG16S	DIODE	1	B0HARR000008
D518	MA4056M	ZENER DIODE	1	MAZ40560M
D519	FMLG16S	DIODE	1	B0HARR000008
D520	ERA22-04	DIODE	1	B0HAGP000001
D521	ERC91-02	DIODE	1	B0HAPM000003
D522	B0HFRJ000012	DIODE	1	
D523,24	ERC91-02	DIODE	2	B0HAPM000003
D525	MA700A	DIODE	1	MA2C700A
D526	D1NL40V70	DIODE	1	B0HALP000002
0527,28	MA167	DIODE	2	MA2C167
D531	ERA22-04	DIODE	1	B0HAGP000001
0532,33	MA167	DIODE	2	MA2C167
D534	ERA22-04	DIODE	1	B0HAGP000001
D535,36	MA165	DIODE	2	MA2C165
D537	AK04	DIODE	1	B0JAMC000003
D538-40	ERA22-04	DIODE	3	B0HAGP000001
D541	MA165	DIODE	1	MA2C165
0542	MA4047H	ZENER DIODE	1	MAZ40470H
D543	MA4039H	ZENER DIODE	1	MAZ40390H
D544	MA4056H	ZENER DIODE	1	MAZ40560H
	ERZV10V621P2	VARISTOR	1	⚠
	E. (E. ( 10 ( 0 E ) )			i .
D900	M1FS4	DIODE	4	B0JCME000025
D900 D2301-04		DIODE DIODE	4 2	B0JCME000025
D900 D2301-04 D2305,06	M1FS4			B0JCME000025 MA2J111
D2301-04 D2305,06 D2307 D2308	M1FS4 RU4AM	DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D3001	MA111	DIODE	1	MA2J111
D3002	M1FS4	DIODE	1	
D3351,52	MA153	DIODE	2	MA3X153
D3501-04	MA3056M	ZENER DIODE	4	MAZ30560M
D3505,06	MA153	DIODE	2	MA3X153
D3507	MA111	DIODE	1	MA2J111
D6401-03	MA8056H	ZENER DIODE	3	MAZ80560H
D6405	D1FL40F4063	DIODE	1	B0ECHP000001
D6406,07	MA8056H	ZENER DIODE	2	MAZ80560H
D6409-12	D1FL40F4063	DIODE	4	B0ECHP000001
D6452,53	MA111	DIODE	2	MA2J111
D6454	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6455	MA111	DIODE	1	MA2J111
D6456	D1FL40F4063	DIODE	1	B0ECHP000001
D6457	M1FL20UF4063	DIODE	1	B0HCMM000009
D6458	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6459	MA111	DIODE	1	MA2J111
D6460,61	B0HCKS000001	DIODE	2	
D6465,66	MA8330M	ZENER DIODE	2	MAZ83300M
D6467	TLP181	PHOTO COUPLER	1	B3PBA000081
D6468	MA111	DIODE	1	MA2J111
D6469	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6470	MA111	DIODE	1	MA2J111
D6472,73	MA111	DIODE	2	MA2J111
D6474	TLP181	PHOTO COUPLER	1	B3PBA0000081
D6475	MA111	DIODE	1	MA2J111
D6476	D1FL40F4063	DIODE	1	B0ECHP000001
D6477	MA8051L	DIODE	1	MAZ80510LL
D6478	B0HCKS000001	DIODE	1	
D6479	MA111	DIODE	1	MA2J111
D6480	TLP181	PHOTO COUPLER	1	B3PBA000081
D6481,82	MA8330M	ZENER DIODE	2	MAZ83300M
D6491,92	D1FL40F4063	DIODE	2	B0ECHP000001
D6495	B0HCKS000001	DIODE	1	
D6501-08	K7GBZEE00002	PHOTO COUPLER	8	
D6509	MA111	DIODE	1	MA2J111
D6511	M1FL20UF4063	DIODE	1	B0HCMM000009
D6512-14	MA111	DIODE	3	MA2J111
D6521	D1FL40F4063	DIODE	1	B0ECHP000001
D6522	MA111	DIODE	1	MA2J111
D6523	D1FL40F4063	DIODE	1	B0ECHP000001
D6524	MA8051L	DIODE	1	MAZ80510LL
D6525	MA111	DIODE	1	MA2J111
D6526	M1FL20UF4063	DIODE	1	B0HCMM000009
D6527	MA111	DIODE	1	MA2J111
D6531	MA8051L	DIODE	1	MAZ80510LL
D6541	B0HCKS000001	DIODE	1	
D6542	MA111	DIODE	1	MA2J111
D6543	MA8051L	DIODE	1	MAZ80510LL
D6544	MA111	DIODE	1	MA2J111
D6545	MA8051L	DIODE	1	MAZ80510LL
D6546-48	MA8330M	ZENER DIODE	3	MAZ83300M
D6549,50	MA111	DIODE	2	MA2J111
D6551,52	MA8051L	DIODE	2	MAZ80510LL

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6553	MA111	DIODE	1	MA2J111
D6570	M1FL20UF4063	DIODE	1	B0HCMM000009
D6572	D1FL40F4063	DIODE	1	B0ECHP000001
D6582	MA8051L	DIODE	1	MAZ80510LL
D6583	LNJ201LPQJA	LED	1	
D6584	MA111	DIODE	1	MA2J111
D6585,86	MA8330M	ZENER DIODE	2	MAZ83300M
D6611,12	M1FS4	DIODE	2	
D6615	D1FL40F4063	DIODE	1	B0ECHP000001
D6620-22	SF20LC30F10	DIODE	3	DOLOTH GOODS
		<del> </del>	1	
D6624	SF20LC30F10	DIODE	-	
D6629	B0HBSM000031	DIODE	1	*********
D6635	MA8051L	DIODE	1	MAZ80510LL
D6636	MA111	DIODE	1	MA2J111
D6637	D1FL40F4063	DIODE	1	B0ECHP000001
D6640	D1FL40F4063	DIODE	1	B0ECHP000001
D6641,42	M1FS4	DIODE	2	
D6645-47	D1FL40F4063	DIODE	3	B0ECHP000001
D6711,12	M1FS4	DIODE	2	
D6715	D1FL40F4063	DIODE	1	B0ECHP000001
D6720-22	SF20LC30F10	DIODE	3	
D6724	SF20LC30F10	DIODE	1	
D6729	B0HBSM000031	DIODE	1	
D6735	MA8051L	DIODE	1	MAZ80510LL
D6736	MA111	DIODE	1	MA2J111
D6737	D1FL40F4063	DIODE	1	B0ECHP000001
D6740,41	D1FL40F4063	DIODE	2	B0ECHP000001
D6750,51	D1FL40F4063	DIODE	2	B0ECHP000001
D6752,53	M1FS4	DIODE	2	
D6754	D1FL40F4063	DIODE	1	B0ECHP000001
D6755	M1FS4	DIODE	1	2020111 000001
D6757	D1FL40F4063	DIODE	1	B0ECHP000001
D6760	MA111	DIODE	1	MA2J111
	MA8051L	<del>                                     </del>	1	
D6761		DIODE	<u> </u>	MAZ80510LL
D6763	MA8051L	DIODE	1	MAZ80510LL
D6764	MA111	DIODE	1	MA2J111
D6765	LNJ201LPQJA	LED	1	
D6766,67	MA8330M	ZENER DIODE	2	MAZ83300M
D6768	MA111	DIODE	1	MA2J111
D6769	LNJ201LPQJA	LED	1	
D6770	MA111	DIODE	1	MA2J111
D7201-04	MA152K	DIODE	4	MA3X152K
D8001,02	MA111	DIODE	2	MA2J111
D9000	MA3036H	ZENER DIODE	1	MAZ30360H
D9001-09	MA3062M	ZENER DIODE	9	MAZ30620M
D9351	MA152K	DIODE	1	MA3X152K
D9352,53	MA3062M	ZENER DIODE	2	MAZ30620M
D9356	MA111	DIODE	1	MA2J111
D9550	B0JCPD000010	DIODE	1	
D9551	MA113	DIODE	1	MA2J113
D9552	M1FS4	DIODE	1	1
D9553	MA152K	DIODE	1	MA3X152K
		DIODE	_	
D9554	MA111	DIODE	1	MA2J111

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F1	TJS3A9630	CONNECTOR	1	K1KA03A00183
F9	TJS3A9630	CONNECTOR	1	K1KA03A00183
F900-1,-2	EYF-52BC	FUSE HOLDER	2	
F901-1,-2	EYF-52BC	FUSE HOLDER	2	
., ., _				
H1	K1KB50B00030	50P CONNECTOR	1	
H2	K1KB40B00015	40P CONNECTOR	1	
H37	TJS3A9640	3P CONNECTOR	1	K1KA03A00171
1174	IVALUED AND ORDANG	400 00111150700		
HX1	K1KB40B00015	40P CONNECTOR	1	
IC081	B3L000000020	IC	1	
IC410	MIP0210SY1TV	IC (LOGIC)	1	
IC411	AN7705F	LINEAR IC	1	
IC430	C0DABZG00001	IC	1	
IC465	AN1431T	LINEAR IC	1	
IC501	AN8026	LINEAR IC	1	
IC502	C5HABZZ00080	IC	1	
IC503	AN7718F	LINEAR IC	1	
IC504,05	AN1431T	LINEAR IC	2	
IC506	C0DAAHG00007	IC	1	
C507	PQ30RV21A	LINEAR IC	1	C0DAEZH00008
C508	AN6912	LINEAR IC	1	
C2301,02	TDA7480	LINEAR IC	2	C1AA00000561
IC2304	PQ09SZ1T	IC	1	C0CBAHG00005
IC2401	BH3865S	LINEAR IC	1	C1BA00000302
IC3001	C1AB00001139	IC	1	
C3002,03	MC14052BF	MOS IC (CMOS GATE ARRLY)*	2	C0JBAR000021
IC3004	CXA1315M	LINEAR IC	1	C1AB00000440
C3006	PQ09SZ1T	IC	1	C0CBAHG00005
C3007,08	PQ12SZ1T	IC	2	C0CBAKG00003
IC3009	AHC2G66HDCTR	INTEGRATED CIRCUIT	1	C0JBAS000109
IC3301	TC4W53F	MOS IC (CMOS S/LOGIC)	1	C0JBAR000224
C3302	C0ABGB000001	IC	1	
C3303	TC4W53F	MOS IC (CMOS S/LOGIC)	1	C0JBAR000224
IC3501	JLC1562BF	MOS IC (MICON LSI)	1	C0JBAZ001265
C3502	TVRJ696-1	IC	1	
IC3515	C0ZBZ0000205	IC	1	
IC3699	TVRJ642-2	ROM IC (EEPROM 16KBIT)	1	
IC3801	MM1065ZMR	LINEAR IC	1	C0CBABB00029
C3802	C0EBE0000066	IC	1	
IC3803	C3ABMG000086	IC	1	
IC3804	C1AB00001494	IC	1	
C3805,06	MM1065ZMR	LINEAR IC	2	C0CBABB00029
C3809	TC74LCX244F	MOS IC (CMOS S/LOGIC)	1	C0JBAZ001234
C4551	C0JBAE000228	IC	1	
C6401-08	C0HBC0000005	IC	8	
C6451	AN1431M	LINEAR IC	1	
C6452,53	AN78L15M	LINEAR IC	2	
C6454	AN78L05M	LINEAR IC	1	
C6471	AN1431M	LINEAR IC	1	
C6491	AN1431M	LINEAR IC	1	
C6501,02	TC74HC14AF	IC	2	C0JBAB000155

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC6511	C0ZBZ0000561	IC	1	
IC6521	C0ZBZ0000561	IC	1	
IC6541,42	C0ZBZ0000561	IC	2	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6601-03	C0ZBZ0000138	IC	3	
IC6604	AN1431M	LINEAR IC	1	
IC6605,06	TC74HC244AF	IC	2	
IC6701-03	C0ZBZ0000138	IC	3	
IC6704	C0ZBZ0000561	IC	1	
IC6705	NJM2903M	INTEGRATED CIRCUIT	1	C0BBBA000019
IC6706	TC74HC244AF	IC	1	
IC6711	AN1431M	LINEAR IC	1	
IC7101	C0JBAZ000005	IC	1	
IC7103	C0DBEZG00004	IC	1	
IC7201	C0JBAZ000005	IC	1	
IC8001	M52346SP	LINEAR IC	1	C1AA00000395
IC8002	TC74HC14AF	IC	1	C0JBAB000155
IC9000	PQ09SZ1T	IC	1	C0CBAHG00005
IC9001	C0CBCBD00005	IC	1	
IC9002-04	C0ABHA000033	IC	3	
IC9006	C0CBCBD00005	IC	1	
IC9007	C0FBAD000069	IC	1	
C9200	MN84504	MOSIC	1	
C9203	C0CBCBD00005	IC	1	
C9206	C0JBAZ000855	IC	1	
IC9210	C3ABPJ000017	IC	1	
IC9212	TLC2933IPWL	INTEGRATED CIRCUIT	1	C0ABFA000012
IC9213	C0CBCBD00005	IC IC	1	COADI ACCOUTE
IC9300	C0ZBZ0000551	IC	1	
IC9300	C0CBCBD00005	IC	1	
C9351	MN102L230	IC	1	
IC9351	HM538123BJ8Z	IC	1	C3HAHC000006
IC9353	TVRJ799-1	IC	1	CSHAHCOOOOO
IC9354 IC9355	+	IC	1	
	TVRJ868			
IC9356	C0JBAZ001201	IC	1	
IC9357	C1DB00000274	IC SOCKET	1	
IC9450S	TJSB01108	IC SOCKET	1	
IC9450	TVRJ709-1	INTEGRATED CIRCUIT	1	
IC9451	C1ZBZ0001996	IC	1	CO IDADOSSES
IC9452	TC74HCU04AF	MOS IC (CMOS S/LOGIC)	1	C0JBAB000159
IC9453	C0EBE0000066	IC IC	1	
IC9455	COCBCAD00007	IC IC	1	
IC9550	CODBAZH00008	IC	1	
IC9551	CODBAMH00006	IC	1	
IC9552	C0DBEZG00004	IC	1	
IC9553	C0JBAZ001604	IC	1	
IC9554	JLC1562BF	MOS IC (MICON LSI)	1	C0JBAZ001265
IC9601	MN84505	MOSIC	1	
IC9602	C3ABPJ000043	IC	1	
IC9603	TVRJ741-1	IC	1	
IC9604	C0ZBZ0000423	IC	1	
IC9612	C0JBAZ000855	IC	1	
IC9700S	TJSB01108	IC SOCKET	1	
IC9700	TVRJ742-2	INTEGRATED CIRCUIT	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9701	C1ZBZ0001996	IC	1	
IC9702	PST9128NR	IC (LOGIC)	1	C0EBE0000066
IC9703	C0CBCAD00007	IC (CCCC)	1	
IC9704	C0ZBZ0000423	IC	1	
C9710-12	C0JBAZ001604	IC	3	
C9801	C0JBAZ001604	IC	1	
IC9802,03	C0JBAZ000005	IC	2	
C9805-22	TC74LCX574F	MOS IC (CMOS S/LOGIC)	18	C0JBAF000218
C9900	C2BBFE000121	IC	1	C00BAI 000210
C9902	M51957BFP	LINEAR IC	1	C0EBB0000024
C9902	C0JBAE000283	IC	1	CUEBB0000024
109904	CUJBAEUUU203		1	
11/2204	V4CD40CD0027	CONNECTOR	4	
JK3301	K1CB106B0027	CONNECTOR	1	
JK3305	K2HA306B0048	JACK	1	
JK3306	K2HA306B0049	JACK	1	
JK3307	K2HA204B0097	JACK	1	
JK3308	K2HA204B0096	JACK	1	
JK3509	K1FB109B0058	CONNECTOR	1	
JK3511	TJS8A9880	CONNECTOR	1	K1FB115B0034
JK3513	K2HC103B0105	JACK	1	
JK8500	K4BC02B00013	TERMINAL	1	
JS1,S2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS3	ERDS2TC0	C 0 OHM, 1/4W	1	
JS3	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4	ERDS2TC0	C 0 OHM, 1/4W	1	
JS4	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5	ERDS2TC0	C 0 OHM, 1/4W	1	
JS5	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS6	ERDS2TC0	C 0 OHM, 1/4W	1	
JS10	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS11	ERDS2TC0	C 0 OHM, 1/4W	1	
JS11	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS12	ERDS2TC0	C 0 OHM, 1/4W	1	
JS24	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS28-32	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS35	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2301	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS8019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
<del>-</del>		, , , , , , , , , , , , , , , , , , , ,	<u> </u>	
L411	ELEXT100KA	PEAKING COIL	1	
L430	G4D4A0000048	SWITCHING TRANSFORMER	1	
L501	EXCELSA39	BEAD CHOKE	1	
L502-07	ERDS2TC0	C 0 OHM, 1/4W	6	
L502-07 L508		BEAD CHOKE		
	EXCELSA39		1	G0A224GA0004
L509	TALFP15B221K	INDUCTION COIL	1	G0A221GA0001
L510,11	ERDS2TC0	C 0 OHM, 1/4W	2	
L515-18	ERDS2TC0	C 0 OHM, 1/4W	4	004404=10
L520	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008
L901	G0A143K00001	LINE CHOKE COIL	1	$\Delta$
L902,03	TLPD048	LINE FILTER	2	Δ
L2301,02	G0ZZ00002023	COIL	2	
L2303,04	EXCELDR35C	BEAD CHOKE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L2306	ELJPA100KB	CHIP INDUCTOR	1	
L3001-03	ELJPA100KB	CHIP INDUCTOR	3	
L3007,08	ELJPA100KB	CHIP INDUCTOR	2	
L3301	TLK20LFA223M	EMI FILTER	1	J0HABB000003
L3302,03	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3304,05	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3306,07	ELJPA100KB	CHIP INDUCTOR	2	
L3351,52	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3353-55	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3356,57	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3358,59	ELJPA100KB	CHIP INDUCTOR	2	
L3501	ELJPA100KB	CHIP INDUCTOR	1	
L3507-09	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3510-13	TLK212T256AL	EMI FILTER	4	J0HAAB000012
		<del> </del>	2	JULIAABUUUTE
L3525,26	ELJPA100KB	CHIP INDUCTOR	+ -	-
L3530	ELJPA100KB	CHIP INDUCTOR	1	
_3555	ELJPA100KB	CHIP INDUCTOR	1	IOLIADDOCCCC:
L3801,02	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3803	G1C100KA0008	INDUCTOR COIL	1	
L3804	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
L3806	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L3807	TALC168T2R2K	CHIP INDUCTOR COIL	1	G1C2R2K00006
L3808	G1C100KA0008	INDUCTOR COIL	1	
_3809	TALC325T4R7M	CHIP INDUCTOR COIL	1	
_3810,11	G1C100KA0008	INDUCTOR COIL	2	
_3813	TALC168T4R7K	CHIP INDUCTOR COIL	1	G1C4R7K00013
_3814-16	G1C100KA0008	INDUCTOR COIL	3	
L3817-19	TLK20LFA224M	EMI FILTER	3	J0HABB000004
L3820,21	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3822-25	ELKE103FA	NOISE FILTER	4	
L3826,27	TLK20LFA224M	EMI FILTER	2	J0HABB000004
L3828,29	TLK20LFA223M	EMI FILTER	2	J0HABB000003
L3830	ELJPA100KB	CHIP INDUCTOR	1	
L4551	ELJPA100KB	CHIP INDUCTOR	1	
L6451,52	J0JJC0000021	CHIP INDUCTOR	2	
 L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472	TSKA158	BEAD CORE	1	G0ZZ00001935
L6602	TSKA158	BEAD CORE	1	G0ZZ00001935
L6604,05	TSKA158	BEAD CORE	2	G0ZZ00001935
L6611,12	ELC16BR82L	CHOKE COIL	2	
L6615,16	ELC16BR82L	CHOKE COIL	2	
L6618	J0JJC0000021	CHIP INDUCTOR	1	
L6620-23	TSKA158	BEAD CORE	4	G0ZZ00001935
L6626,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6636,37	<u> </u>	BEAD CORE	2	G0ZZ00001935
	TSKA158	BEAD CORE	+	G0ZZ00001935
L6644,45	TSKA158		2	302200001933
L6647,48	J0JJC0000021	CHIP INDUCTOR	2	C07700004005
L6702-04	TSKA158	BEAD CORE	3	G0ZZ00001935
L6705	TALL08N101KA	INDUCTION COIL	1	G0A101EA0008
L6711	ELC16BR82L	CHOKE COIL	1	
L6713,14	ELC16BR82L	CHOKE COIL	2	
L6716	ELC16BR82L	CHOKE COIL	1	
L6718	J0JJC0000021	CHIP INDUCTOR	1	
L6720-23	TSKA158	BEAD CORE	4	G0ZZ00001935

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6726,27	TSKA158	BEAD CORE	2	G0ZZ00001935
L6736,37	TSKA158	BEAD CORE	2	G0ZZ00001935
L6744,45	TSKA158	BEAD CORE	2	G0ZZ00001935
L6747	J0JJC0000021	CHIP INDUCTOR	1	
L6750	TSKA158	BEAD CORE	1	G0ZZ00001935
L7101-03	J0JJC0000021	CHIP INDUCTOR	3	
L7105	J0JJC0000021	CHIP INDUCTOR	1	
L7201-05	J0JJC0000021	CHIP INDUCTOR	5	
L8001,02	ELJPA100KB	CHIP INDUCTOR	2	
L8501,02	TLPD061	LINE FILTER	2	G0A2R5H00003
L9001-04	ELKE103FA	NOISE FILTER	4	
L9005-10	EXCCL3225U1	EMI FILTER	6	
L9200,01	EXCCL3225U1	EMI FILTER	2	
L9300	EXCCL3225U1	EMI FILTER	1	
L9350	ELJPA100KB	CHIP INDUCTOR	1	
L9450	EXCCL3225U1	EMI FILTER	1	
	+		1	
L9451	ELJPA150KF	CHIP INDUCTOR		
L9551	G1C220M00029	INDUCTOR COIL	1	
L9552	G1C470M00012	INDUCTOR COIL	1	
L9553	EXCCL3225U1	EMI FILTER	1	
L9601	ELJFA1R0KF	CHIP COIL	1	
L9701	EXCCL3225U1	EMI FILTER	1	
L9801	EXCCL3225U1	EMI FILTER	1	
L9803	EXCCL3225U1	EMI FILTER	1	
L9805-08	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
			_	
LC9000-02	J0E3505B0002	LCR FILTER	3	
LC9003	ELKE103FA	NOISE FILTER	1	
LC9006	ELKE103FA	NOISE FILTER	1	
LC9300-02	ELKE103FA	NOISE FILTER	3	
LC9501-05	ELKE103FA	NOISE FILTER	5	
LC9507,08	ELKE103FA	NOISE FILTER	2	
LC9801-03	ELKE103FA	NOISE FILTER	3	
LC9901	ELKE103FA	NOISE FILTER	1	
P1	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
P2	K1KA06A00180	6P CONNECTOR	1	
P6	K1KA07A00056	7P CONNECTOR	1	
P9	K1KA02A00244	2P CONNECTOR	1	
P10	TJS1A8810	5P CONNECTOR	1	K1KA05A00177
P12	K1KA05A00139	5P CONNECTOR	1	
P23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
P25	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
P27	TJS1A8850	9P CONNECTOR	1	K1KA09A00099
Q082	2SD601A	TRANSISTOR	1	2SD0601A
Q401-03	2SC3311A	TRANSISTOR	3	2SC3311AW
Q410	2SC3311A	TRANSISTOR	1	2SC3311AW
Q431,32	2SK2917	FET	2	B1DEGQ000003
Q433	2SD2177R	TRANSISTOR	1	
Q434	2SB1434R	TRANSISTOR	1	2SB14340RA
Q435	2SC3311A	TRANSISTOR	1	2SC3311AW
				+
Q436	2SA1309A	TRANSISTOR	1	2SA13090WA

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q501	2SK2847	FET	1	B1DEFU000002
Q502	B1DEGQ000019	FET	1	
Q503	2SB621A	TRANSISTOR	1	2SB0621AW
Q504	2SC3311A	TRANSISTOR	1	2SC3311AW
Q505	2SA1309A	TRANSISTOR	1	2SA13090WA
Q506	2SC3311A	TRANSISTOR	1	2SC3311AW
Q2301-03	2SD601A	TRANSISTOR	3	2SD0601A
Q2305,06	2SD601A	TRANSISTOR	2	2SD0601A
Q2406	2SD601A	TRANSISTOR	1	2SD0601A
Q2408	2SD601A	TRANSISTOR	1	2SD0601A
Q2410	2SD601A	TRANSISTOR	1	2SD0601A
Q3013,14	2SD601A	TRANSISTOR	2	2SD0601A
Q3085,86	2SB709A	TRANSISTOR	2	2SB0709A
		<del> </del>	9	
Q3301-09	2SD601A	TRANSISTOR	_	2SD0601A
Q3351,52	2SD601A	TRANSISTOR	2	2SD0601A
Q3353	2SB709A	TRANSISTOR	1 -	2SB0709A
Q3354-58	2SD601A	TRANSISTOR	5	2SD0601A
Q3359	2SB709A	TRANSISTOR	1	2SB0709A
Q3501-03	2SD601A	TRANSISTOR	3	2SD0601A
Q3507	2SB709A	TRANSISTOR	1	2SB0709A (HZ)
Q3507	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3508	2SB709A	TRANSISTOR	1	2SB0709A (HZ)
Q3508	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3509	2SB709A	TRANSISTOR	1	2SB0709A (HZ)
Q3509	2SD601A	TRANSISTOR	1	2SD0601A (HX)
Q3513	2SD601A	TRANSISTOR	1	2SD0601A
Q3514	2SB709A	TRANSISTOR	1	2SB0709A
Q3515	2SD601A	TRANSISTOR	1	2SD0601A
Q3516	2SB709A	TRANSISTOR	1	2SB0709A
Q3531,32	2SD601A	TRANSISTOR	2	2SD0601A
Q3801,02	2SB709A	TRANSISTOR	2	2SB0709A
Q3803,04	2SD601A	TRANSISTOR	2	2SD0601A
Q3805-07	2SB709A	TRANSISTOR	3	2SB0709A
Q3808	2SD601A	TRANSISTOR	1	2SD0601A
Q3809	2SK198R	FET	1	2SK01980R
Q3810	2SD601A	TRANSISTOR	1	2SD0601A
			<u> </u>	
Q3812,13	2SB709A	TRANSISTOR	2	2SB0709A
Q3815	2SB709A	TRANSISTOR	1	2SB0709A
Q3817	2SB709A	TRANSISTOR	1	2SB0709A
Q6401	2SK620	FET	1	2SK0620
Q6451	B1BBCJ000003	TRANSISTOR	1	
Q6452	2SB709A	TRANSISTOR	1	2SB0709A
Q6453	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6454	2SD814A	TRANSISTOR	1	
Q6471	B1BBCJ000003	TRANSISTOR	1	
Q6472	2SB709A	TRANSISTOR	1	2SB0709A
Q6474	2SD814A	TRANSISTOR	1	
Q6476,77	2SD601A	TRANSISTOR	2	2SD0601A
Q6491,92	2SC1473A	TRANSISTOR	2	2SC1473AE
Q6511,12	B1DFGL000005	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	2SD0601A
Q6521	FS7VS14AT11	FET	1	
Q6522-29	2SK2993	FET	8	
		The state of the s		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6541	2SB1073001TV	TRANSISTOR	1	
Q6542-49	B1DFHM000002	TRANSISTOR	8	
Q6550	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6551	2SD601A	TRANSISTOR	1	2SD0601A
Q6552	FS7VS14AT11	FET	1	
Q6553	2SB1073001TV	TRANSISTOR	1	
Q6555	FS7VS14AT11	FET	1	
Q6581	2SD601A	TRANSISTOR	1	2SD0601A
Q6601,02	2SK3652000SB	TRANSISTOR	2	
Q6605,06	2SK3652000SB	TRANSISTOR	2	
Q6611	2SD2185	TRANSISTOR	1	
Q6612	2SB1073001TV	TRANSISTOR	1	
Q6613	2SD2185	TRANSISTOR	1	
Q6614	2SB1073001TV	TRANSISTOR	1	
Q6621	2SK3637000VE	TRANSISTOR	1	
Q6624	2SK3637000VE	TRANSISTOR	1	
Q6641,42	B1DFHM000002	TRANSISTOR	2	000001011
Q6671	2SB940A	TRANSISTOR	1	2SB0940AJ
Q6672	2SC1473A	TRANSISTOR	1	2SC1473AE
Q6673	2SD1263A	TRANSISTOR	1	
Q6701,02	2SK3652000SB	TRANSISTOR	2	
Q6705,06	2SK3652000SB	TRANSISTOR	2	
Q6711	2SD2185	TRANSISTOR	1	
Q6712	2SB1073001TV	TRANSISTOR	1	
Q6713	2SD2185	TRANSISTOR	1	
Q6714	2SB1073001TV	TRANSISTOR	1	
Q6721	2SK3637000VE	TRANSISTOR	1	
Q6724	2SK3637000VE	TRANSISTOR	1	
Q6741,42	B1DFHM000002	TRANSISTOR	2	
Q6745,46	2SK326800L	FET	2	
Q6751	2SD1264	TRANSISTOR	1	2SD12640J
Q6752,53	2SC1473	TRANSISTOR	2	2SC14730E
Q6755,56	2SD601A	TRANSISTOR	2	2SD0601A
Q7201,02	2SB709A	TRANSISTOR	2	2SB0709A
Q8021	2SD601A	TRANSISTOR	1	2SD0601A
Q9350	2SK620	FET	1	2SK0620
Q9500,02	2SD601A	TRANSISTOR	2	2SD0601A
Q9501	2SK620	FET	1	2SK0620
Q9502	2SD601A	TRANSISTOR	1	2SD0601A (D2)
Q9502	2SK620	FET	1	2SK0620 (D1)
Q9504	2SK620	FET	1	2SK0620
Q9701-03	2SD601A	TRANSISTOR	3	2SD0601A
Q9904	2SD601A	TRANSISTOR	1	2SD0601A
R081	TAJAAH0470JV	M 47 OHM,J,1/16W	1	D0GB470JA006
R082	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
R083	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R084	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R088	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R091,92	TAJAAH0470JV	M 47 OHM,J,1/16W	2	D0GB470JA006
R093,94	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R401,02	ERF10TK3R3	W 3.3 OHM, 10W	2	
R403	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R404	ERDS2TJ473	C 47KOHM, J,1/4W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R405	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R406	ERDS2TJ683	C 68KOHM, J,1/4W	1	
R407	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R408	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R409	ERU5TAJ150	F 15 OHM, 5W	1	Δ
R411	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R412	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R413	ERG1FJS104D	M 100KOHM, J, 1W	1	
R414	ERDS2TJ561	C 560 OHM, J,1/4W	1	
R415	ERDS2TJ6R8	C 6.8 OHM, J,1/4W	1	
R416	ERDS1TJ221	C 220 OHM, J,1/2W	1	
R417	ERDS1TJ391	C 390 OHM, J,1/2W	1	
R418,19	ERDS2TJ104	C 100KOHM, J,1/4W	2	
R420	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R422-24	ERDS2TJ103	C 10KOHM, J,1/4W	3	
R431	ERDS2TJ272	C 2.7KOHM, J,1/4W	1	
R432	ERDS1FJ224	C 220KOHM, J,1/2W	1	
R433	ERDS1FJ274	C 270KOHM, J,1/2W	1	
R434,35	ERG3FJS333D	M 33KOHM, J, 3W	2	
R436,37	ERF5EKR15	W0.15 OHM, 5W	2	
R438	ERDS2TJ270	C 27 OHM, J,1/4W	1	
R439	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R440	ER0S2CKF5602	M 56KOHM, F,1/4W	1	EROS2CKF5602
R441	ERG1FJS100D	M 10 OHM, J, 1W	1	
R442	ERDS1FJ100	C 10 OHM, J,1/2W	1	
R443	ERDS1FJ103	C 10KOHM, J,1/2W	1	
R444	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R445	ERDS2TJ684	C 680KOHM, J,1/4W	1	
R446	ERDS1FJ100	C 10 OHM, J,1/2W	1	
R447	ERDS1FJ103	C 10KOHM, J,1/2W	1	
R448	ERDS2TJ333	C 33KOHM, J,1/4W	1	
R449	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R450,51	ERDS2TC0	C 0 OHM, 1/4W	2	
R452	ER0S2CKF2701	M 2.7KOHM, F,1/4W	1	
R454-56	ER0S2CKF2203	M 220KOHM, F,1/4W	3	
R457	ER0S2CKF6800	M 680OHM, F,1/4W	1	
R458	ER0S2CKF1801	M 1.8KOHM, F,1/4W	1	
R459-61	ER0S2CKF2203	M 220KOHM, F,1/4W	3	
R462	ERG1FJS393D	M 39KOHM, J, 3W	1	
R463	ERG1FJS473D	M 47KOHM, J, 3W	1	
R464	ERG2FJS823D	M 82KOHM, J, 3W	1	
R465	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R466	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R467	ERDS2TJ153	C 15KOHM, J,1/4W	1	
R468,69	ERDS2TJ223	C 22KOHM, J,1/4W	2	
R470	ERDS2TJ272	C 2.7KOHM, J,1/4W	1	
R471	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R472	ERDS1FJ2R7	C 2.7 OHM, J,1/2W	1	
R473	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R474	ERDS2TJ473	C 47KOHM, J,1/4W	1	
R475	ERDS2TJ560	C 56 OHM, J,1/4W	1	
R476	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R477,78	ERDS2TJ222	C 2.2KOHM, J,1/4W	2	
R479	ERG1FJS222D	M 2.2KOHM, J, 1W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R501	ERDS2TJ152	C 1.5KOHM, J,1/4W	1	
R502	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R503,04	ERG2FJS104D	M 100KOHM, J, 2W	2	
R506	ER0S2CKF1801	M 1.8KOHM, F,1/4W	1	
R507	ER0S2CKF4300	M 430OHM, F,1/4W	1	
R509	ERDS1FJ100	C 10 OHM, J,1/2W	1	
R510,11	ERX2FJSR47D	M 0.470HM, J, 2W	2	
R512	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R513	ERDS2TJ332	C 3.3KOHM, J,1/4W	1	
R514	ERX2FJSR47D	M 0.470HM, J, 2W	1	
R515	ERDS1FJ681	C 680 OHM, J,1/2W	1	
R516	ERX2FJSR47D	M 0.470HM, J, 2W	1	
R518	ERX2FJSR47D	M 0.470HM, J, 2W	1	
R519	ERDS2TJ122	C 1.2KOHM, J,1/4W	1	
R520	ERG3FJS683D	M 68KOHM, J, 3W	1	
R522-24	ERG3FJS683D	M 68KOHM, J, 3W	3	
R525,26	ERDS1FJ220	C 22 OHM, J,1/2W	2	
R527	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R528,29	ERDS2TJ102	C 1KOHM, J,1/4W	2	
R530,31	ERDS2TJ222	C 2.2KOHM, J,1/4W	2	
R532,33	ERDS2TJ222 ERDS2TJ101	C 2.2KOHW, 3,1/4W	2	
R534,35	ERDS2TJ473	C 47KOHM, J,1/4W	2	
	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R536				ERUSZCKF2551
R537	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R538	ER0S2CKF6192	M61.9KOHM, F,1/4W	1	EDOCOCKEOET4
R539	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R540	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
R541,42	ER0S2CKF4992	M49.9KOHM, F,1/4W	2	EROS2CKF4992
R543	ER0S2CKF4642	M46.4KOHM, F,1/4W	1	
R545	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R546	ERDS1FJ220	C 22 OHM, J,1/2W	1	
R547	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R548	ERDS1FJ471	C 470 OHM, J,1/2W	1	
R549	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R550	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R551	ERDS2TJ151	C 150 OHM, J,1/4W	1	
R552,53	ERG2FJS471D	M 470 OHM, J, 2W	2	
R554	ERDS2TJ682	C 6.8KOHM, J,1/4W	1	
R555	ER0S2CKF1212	M12.1KOHM, F,1/4W	1	
R556	ERDS2TJ332	C 3.3KOHM, J,1/4W	1	
R557	ER0S2CKF2551	M2.55KOHM, F,1/4W	1	EROS2CKF2551
R558	ER0S2CKF1501	M1.50KOHM, F,1/4W	1	EROS2CKF1501
R559	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R560	ER0S2CKF3741	M3.74KOHM, F,1/4W	1	
R561	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R562	ER0S2CKF3830	M 383 OHM, F,1/4W	1	
R563	ER0S2CKF1213	M 121KOHM, F,1/4W	1	
R564	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R565	ERDS2TJ102	C 1KOHM, J,1/4W	1	
R566	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R567	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R568	ERDS2TJ103	C 10KOHM, J,1/4W	1	
R569	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R570	ERDS2TJ473	C 47KOHM, J,1/4W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R571	ERDS2TJ273	C 27KOHM, J,1/4W	1	
R572	ERDS2TJ223	C 22KOHM, J,1/4W	1	
R573,74	ER0S2CKF1803	M 180KOHM, F,1/4W	2	
R575	ER0S2CKF1002	M 10KOHM, F,1/4W	1	
R576	ERDS2TJ222	C 2.2KOHM, J,1/4W	1	
R577	ERDS2TJ470	C 47 OHM, J,1/4W	1	
R578	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R579	ERDS2TJ104	C 100KOHM, J,1/4W	1	
R580	ERDS2TJ471	C 470 OHM, J,1/4W	1	
R581	ERDS2TJ123	C 12KOHM, J,1/4W	1	
R582	ERDS2TJ472	C 4.7KOHM, J,1/4W	1	
R583	ERDS2TJ680	C 68 OHM, J,1/4W	1	
R584	ERDS1FJ3R3	C 3.3 OHM, J,1/2W	1	
R585	ERG3FJS683D	M 68KOHM, J, 3W	1	
R586,87	ERDS1FJ224	C 220KOHM, J,1/2W	2	
R900,01	ERC12ZGK105	S 1MOHM, K,1/2W	2	Δ
R1554,55	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2301	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2304	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2305,06	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R2309	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2310	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2319,20	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2322,23	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2324,25	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R2326	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2327	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R2328	ERJ6GEYJ683	M 68KOHM,J,1/10W	1	
R2329,30	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	2	
R2331	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2332	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2333	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2334	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
	<del> </del>	M 12KOHM,J,1/10W	2	
R2335,36	ERJ6GEYJ123	, ,		
R2337,38	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2341	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2343	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2346	ERJ6GEYJ123	M 12KOHM, J,1/10W	1	
R2347	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R2348	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2349,50	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2408	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R2410	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2431	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2434	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2438	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2439	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2440	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2441	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R2445	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2448	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2450	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R2452	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2453	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2456	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R2457	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R2460	ERJ6ENF1802	M 18KOHM, 1/10W	1	
R2461,62	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R2463	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R2464	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2466	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2467	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2469	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R2470	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2471	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2472	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R2473	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2476,77	ERJ6GEYJ220	M 22 OHM,J,1/10W	2	
R2480	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2481,82	ERJ6GEYJ153	M 15KOHM,J,1/10W	2	
R2483	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2484	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3001-04	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R3007	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R3009-15	ERJ3GEYJ560	M 56 OHM,J,1/16W	7	
R3016-21	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3022,23	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3024-29	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3030,31	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R3032,33	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R3034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3036	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3037	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3038	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3039-43	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R3045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3046	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3047	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3078	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3079	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3087,88	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3101-08	ERJ3GEYJ334	M 330KOHM,J,1/16W	8	D0GB334JA002
R3109	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3301	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3303	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3304,05	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3306	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
R3307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3308	ERJ6GEYJ184	M 180KOHM,J,1/10W	1	
R3309	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3310	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3311	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3312	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R3313	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3314	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3315	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3316-18	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3319-21	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R3322	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3323	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3324	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3325-27	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3328-31	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3332,33	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3334	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3335	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3336	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3337	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3338,39	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R3340	ERJ6ENF9310	M 931 OHM, 1/10W	1	
R3341	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3342	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R3343	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3344	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3345	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3346-48	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3349,50	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	DOGBIOTOAGOO
R3351,52	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3353-55	ERJ6ENF75R0		3	
		M 75 OHM, 1/10W		
R3356,57	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	DOCDANA IANNO
R3358-61	TAJAAH0101JV	M 100 OHM,J,1/16W	4	D0GB101JA006
R3362,63	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	D00D404 14000
R3364	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3365	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3366,67	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3368	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3369-72	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3373,74	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3375-77	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3378,79	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	
R3380-82	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R3383-85	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3386,87	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R3388	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3389,90	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R3391	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3392	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3393,94	ERJ3GEYJ3R3	M 3.3 OHM,J,1/16W	2	
R3395	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3396	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3400	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3501-03	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3504	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R3505	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3506	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3507	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3508	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	(HZ)
R3508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3509	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	(HZ)

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3509	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	(HX)
R3510,11	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	(HX)
R3511	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006 (HZ)
R3513,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R3516,17	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3518-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R3526-28	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R3529,30	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R3532-34	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R3535,36	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
R3537	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(HX)
R3537	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	(HZ)
R3538	ERJ6ENF75R0	M 75 OHM, 1/10W	1	(HZ)
R3538	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(HX)
R3539,02	ERJ6ENF75R0	M 75 OHM, 1/10W	2	(IIX)
R3540	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
			+	
R3541	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3547	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	(117)
R3548	ERJ6ENF7500	M 750 OHM, 1/10W	1	(HZ)
R3548	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	(HX)
R3549,50	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R3577	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3578	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3579	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3580	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3581	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3582	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3585,86	ERJ6GEYJ560	M 56 OHM,J,1/10W	2	
R3589	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3590	ERJ6GEYJ560	M 56 OHM,J,1/10W	1	
R3595-97	ERJ6GEYJ102	M 1KOHM,J,1/10W	3	
R3599	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3603,04	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3611-14	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	4	
R3626-29	ERJ6GEYJ3R3	M 3.3KOHM,J,1/10W	4	
R3653	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3654	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R3655	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R3656		M 33KOHM,J,1/10W	1	
	ERJ6GEYJ333		+	
R3663,64	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3668	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3672	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3755,56	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3764-66	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R3776,77	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3778	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3801,02	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3803,04	ERJ6GEYJ561	M 560 OHM,J,1/10W	2	
R3805	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3806	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3808	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3809	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3810	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R3811	ERJ6ENF2200	M 220 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3812	ERJ6ENF3300	M 330 OHM, 1/10W	1	
R3813	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
R3814	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R3815	ERJ6ENF2200	M 220 OHM, 1/10W	1	
R3816	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R3817	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3818	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3819	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3820	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R3821	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R3822	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3823	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3824	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3825	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
		· ·	1	
R3826	ERJ6ENF1500	M 150 OHM, 1/10W		
R3827	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3828	ERJ6ENF47R0	M 47 OHM, 1/10W	1	Doopted :::::
R3829	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3830,31	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3832	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3833	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3834	ERJ6ENF47R0	M 47 OHM, 1/10W	1	
R3835	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3836	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3837-40	EXB38V471J	RESISTOR ARRAY	4	
R3841	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3842	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3843	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3845	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3846	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3848	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R3849	ERJ6ENF3000	M 300 OHM, 1/10W	1	
R3850	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3851	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3852	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R3853	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R3854	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3855	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
	+	M 240 OHM, 1/10W	1	
R3856	ERJ6ENF2400			
R3857	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R3858	ERJ6ENF2400	M 240 OHM, 1/10W	1	
R3859	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	DOODOOL LACCO
R3860	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	D0GB391JA002
R3861	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	-
R3862	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3863,64	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R3865	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3866	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R3867-69	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R3870	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R3871	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3872	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R3873	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3874	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3875,76	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	2	
R3877	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3879	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R3881	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3884-86	TAJAAH0820JV	M 82 OHM,J,1/16W	3	D0GB820JA006
R3887	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R3888	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3890	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3891	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3892	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R3893	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3894	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R3895	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R3896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4521	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4525	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4551	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4552	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4560	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4561	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R4601	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4604	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R6401-08	ERJ6GEYJ221	<u> </u>	8	
		M 220 OHM,J,1/10W	1	
R6409	ERJ6GEYJ224	M 220KOHM, J, 1/10W	_	
R6410,11	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6412	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6413	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6420-23	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6424	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6425-28	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6429	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6441	ERJ6ENF7502	M 75KOHM, 1/10W	1	
R6442	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6443	EVMEASA00B24	CONTROL 20KOHMB 0.3W	1	
R6444	ERJ6GEYJ272	M 2.7KOHM,J,1/10W	1	
R6445	ERJ6ENF2551	M2.55KOHM, 1/10W	1	
R6447	ERG2FJS223D	M 22KOHM, J, 2W	1	
R6448	ERG2FJS472D	M 82KOHM, J, 3W	1	
R6453	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6454	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6455	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6456	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R6457,58	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6459-61	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R6462	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R6463	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6464	ERG2FJS273D	M 27KOHM, J, 2W	1	
R6465	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6466	ERJ14YJ101	M 100 OHM, J,1/4W	1	
R6467,68	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6469	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6470	ERJ6GEYJ273	M 27KOHM,J,1/10W	1	
R6471	ERG3FJS123D	M 12KOHM, J, 3W	1	
R6473	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6474	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6475	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R6476	ERJ6GEYJ394	M 390KOHM,J,1/10W	1	
R6477	EVMEASA00B33	CONTROL 3KOHMB 0.3W	1	
R6478	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6479,80	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6482	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6483	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6484	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6485,86	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6489	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6491	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6492,93	ERJ6ENF2203	M 220KOHM, 1/10W	2	
R6494	ERJ12YJ102	M 1KOHM,J, 1/2W	1	
R6497	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6498,99	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6500-02	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6503,04	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6505-07	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6508	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6509	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6510	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6511	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6512	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6513	ERX2FJS2R2D	M 2.2 OHM, J, 2W	1	
R6514	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6515	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6516	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6518	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6521	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	DOGBTOTJAGOG
R6522	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6524	ERJ6GEYF222		1	
	ERJ6GEYJ104	M 2.2KOHM,F,1/10W M 100KOHM,J,1/10W	1	
R6525			_	
R6526	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6527,28	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6529	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6530-37	ERJ6GEYJ470	M 47 OHM,J,1/10W	8	
R6538	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	DOCEMAN LACOC
R6539	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6540	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6541	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6542-49	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	8	-
R6550	ERG1FJS332D	M 3.3KOHM, J, 1W	1	
R6551-53	ERJ6ENF1003	M 100KOHM, 1/10W	3	-
R6554	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6555	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6556	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R6558	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6560,61	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6563	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6565	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6566	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6567	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6568	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6570	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	1	
R6571-78	ERJ6GEYJ471	M 470 OHM,J,1/10W	8	
R6582,83	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6584	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6586	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6587	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6589	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6591	ERJ6GEYJ152	<del></del>	1	
	ERJ6GEYJ224	M 1.5KOHM,J,1/10W	2	
R6592,93		M 220KOHM, J, 1/10W		
R6594	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6595,96	ERJ6ENF5231	M5.23KOHM, 1/10W	2	
R6601	ERD25V0T	M OHM, 1/10W	1	
R6605-07	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6611-14	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	4	
R6619,20	ERJ6GEYJ240	M 24 OHM,J,1/10W	2	
R6623	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6624	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6625	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6626	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6627,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6630-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	
R6636-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6641,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6643,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R6647,48	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6655	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6656	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6661,62	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	500510107000
R6667,68	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6669	ERJ3GEY0R00	M 0 OHM, 1/16W	1	DOODIOIDAGGO
R6670	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R6671	ERG3FJS821D	M 820 OHM, J, 3W	1	
	ERJ6GEYJ101		1	
R6672 R6673		M 100 OHM,J,1/10W M 10 OHM, J, 1W	1	
	ERG1SJ100P	- ' '		
R6678,79	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	-
R6680,81	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	-
R6682-85	ERJ3GEYJ471	M 470 OHM, J,1/16W	4	
R6686-89	ERJ3GEYJ473	M 47KOHM,J,1/16W	4	-
R6690,91	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R6692,93	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R6694-96	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	-
R6697-99	ERJ3GEYJ473	M 47KOHM,J,1/16W	3	
R6701	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6702	ERD25V0T	M OHM, 1/10W	1	
R6711-14	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	4	
R6719,20	ERJ6GEYJ240	M 24 OHM,J,1/10W	2	
R6723	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6724	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6725	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6726	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6727,28	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6730-35	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	6	
R6736-39	ERJ12YJ1R0	M 1 OHM, J,1/2W	4	
R6741,42	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6743,44	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R6747,48	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6759,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6761	ERJ12YJ470	M 47 OHM, J,1/2W	1	
R6762-64	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6765	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6766-68	ERJ6GEYJ223	M 22KOHM,J,1/10W	3	
R6769,70	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6771,72	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6773	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6774	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R6777,78	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6779,80	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6783	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R6784	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6785,86	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6787,88	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R6790	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6791	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6801-03	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6804-06	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6807-09	ERJ3GEYJ471	M 470 OHM,J,1/16W	3	
R6810-12	ERJ3GEYJ223	M 22KOHM,J,1/16W	3	
R6818,19	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6820	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6821	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6823	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6824	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6825	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6826	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R6827	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R7101-12	ERJ14YJ220	M 22 OHM, J,1/4W	12	
R7117	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7119	ERJ6ENF1651	M1.65KOHM, 1/10W	1	
R7120	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7126-28	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R7130-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7201-16	ERJ14YJ220	M 22 OHM, J,1/4W	16	
R7201-10	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7217	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R7221-24	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7226-33	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R8002	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R8003	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8004	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8006,07	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R8008	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R8009	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R8010	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R8011	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R8012	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8013	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R8015	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8017-19	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R8023,24	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R8025	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R8026	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8027	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R8028-30	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	3	
R8033	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R8035	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R8036	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9000	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9008	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9010	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
R9018-20	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9034	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9035	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9036	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9037	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9038	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9039	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9040	ERJ6ENF5111	M5.11KOHM, 1/10W	1	
R9041	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R9045	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9046	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9047	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9048	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9049	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9050,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9052	ERJ6ENF1051	M1.05KOHM, 1/10W	1	
R9053	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9058	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9059	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9060	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9061	ERJ6ENF1000	M 100 OHM, 1/10W	1	
R9063	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
R9064	ERJ6ENF1000	M 100 OHM, 1/10W	1	+
R9065	ERJ3GEYJ152	M 1.5KOHM, J,1/16W	1	
R9068-70	ERJ6ENF2701	M 2.7KOHM, 1/10W	3	
R9006-70 R9071-73	ERJ6ENF1800	M 180 OHM, 1/10W	3	+
R9076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9077	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	-
R9078	ERJ6ENF1800	M 180 OHM, 1/10W	1	
R9080,81	ERJ6ENF1800	M 180 OHM, 1/10W	2	-
R9082	ERJ3GEY0R00	M 0 OHM, 1/16W	1	Doopted :::::
R9102,03 R9104	TAJAAH0101JV TAJAAH0680JV	M 100 OHM,J,1/16W M 68 OHM,J,1/16W	1	D0GB101JA006

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9105,06	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9107-10	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9113	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9115	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9121-29	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9200,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9204,05	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9207,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9210	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9211,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9228	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9229	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9239,40	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9241	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9242,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9244	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9245	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9246	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9247,48	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9249	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9253	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9254	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9257	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9259	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9261	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9262,63	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R9264-70	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
R9271	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9274	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9275	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9285	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9286,87	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9288,89	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R9290	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9291	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R9293	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9300	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9301-05	TAJAAH0101JV	M 100 OHM,J,1/16W	5	D0GB101JA006
R9306,07	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9308	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9309	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9350	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9351	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9352,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9354		M 2.7KOHM,J,1/16W	1	
	ERJ3GEYJ272	- ' '	+	
R9355,56	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9357	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	D0CB404 14000
R9358	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9359	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9360,61	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9362-64	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R9365	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9369	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9371	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9372-75	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	4	
R9376	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9377	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9378	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9379	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9380	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9381	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9382	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9383-86	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9387-90	ERJ3GEYJ560	M 56 OHM,J,1/16W	4	
R9391	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9392	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9394-00	ERJ3GEYJ102	M 1KOHM,J,1/16W	7	
R9401,02	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
•				
R9403	ERJ3GEY0R00	M 0 OHM, 1/16W	1	DOCDANA LACOC
R9404-06	TAJAAH0101JV	M 100 OHM,J,1/16W	3	D0GB101JA006
R9407,08	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9409	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9410	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9411	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9413	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9414	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9416	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9417	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9418	ERJ3GEYJ152	M 1.5KOHM,J,1/16W	1	
R9419	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R9420	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9421	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9425	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9426	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9427	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9429	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9432	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9434,35	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9436-39	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9440,41	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9442-49	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R9454-58	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9459	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9460,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9464	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9466	ERJ3GEYJ103		1	
	ERJ3GEY0R00	M 10KOHM,J,1/16W	1	
R9467		M 0 OHM, 1/16W		
R9469	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9470	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9472,73	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9475	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9478	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9501	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9502-07	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R9514-19	EXB38V680J	RESISTOR ARRAY	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9520,21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9523	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9525,26	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9527-29	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9530-32	EXB38V680J	RESISTOR ARRAY	3	
R9533	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9535-43	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R9548	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9549	TAJAAH0680JV	M 68 OHM,J,1/16W	1	D0GB680JA006
R9551	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555-58	ERJ8RSJR10	M 1 OHM, 1/8W	4	
R9559	ERJ6ENF1301	M 1.3KOHM, 1/10W	1	
R9560	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9561	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9562	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9563	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R9564	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9565	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R9566	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9567	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9568,69	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9572	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9572	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9576	ERJ3GEYJ103	-	1	
R9577	ERJ3GEYJ102	M 10KOHM, J,1/16W	1	
		M 1KOHM,J,1/16W	1	
R9578	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	_	
R9581	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9582-85	ERJ3GEYJ330	M 33 OHM,J,1/16W	4	
R9588	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9601	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9607,08	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	D00D404 14000
R9609	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9616	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9617,18	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9619,20	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9624,25	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9626	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9629	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9630	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9632-34	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R9635-39	ERJ3GEYJ100	M 10 OHM,J,1/16W	5	
R9642-45	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9652	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9654	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9656	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9701	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9702	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9703	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9704-07	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9709	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9710-12	ERJ3GEY0R00	M 0 OHM, 1/16W	3	


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9714	EXB38V103J	RESISTOR ARRAY	1	
R9715-17	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9718,19	EXB38V103J	RESISTOR ARRAY	2	
R9720	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9722,23	EXB38V103J	RESISTOR ARRAY	2	
R9725	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9726	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9727	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9728	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9729	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9730	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9732	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9742	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9743	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9744,45	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9746	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
			+	
R9747,48	ERJ3GEYJ103 TAJAAH0101JV	M 10KOHM,J,1/16W	2	D0CP404 1400C
R9749		M 100 OHM,J,1/16W	1	D0GB101JA006
R9750	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R9755-57	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9758-62	ERJ3GEYJ151	M 150 OHM,J,1/16W	5	
R9765-71	ERJ3GEYJ151	M 150 OHM,J,1/16W	7	
R9775	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9793-00	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R9801,02	EXB38V103J	RESISTOR ARRAY	2	
R9803-05	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9806	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9809-11	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9813	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9814	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9816-18	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9819	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9821	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9823-28	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9831	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9832,33	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9836,37	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9838	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9839,40	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9841	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R9842,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9844-46	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R9851-71	EXB38V470J	RESISTOR ARRAY	21	
R9872-76	TAJAAH0470JV	M 47 OHM,J,1/16W	5	D0GB470JA006
R9877	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9878	EXB38V151J	RESISTOR ARRAY	1	
		_	+	
R9879,80	ERJ3GEYJ151	M 150 OHM,J,1/16W	2	
R9881	EXB38V680J	RESISTOR ARRAY	1	DOC DEGO LACOS
R9882	TAJAAH0680JV	M 68 OHM, J, 1/16W	1 -	D0GB680JA006
R9884-88	TAJAAH0470JV	M 47 OHM,J,1/16W	5	D0GB470JA006
R9890	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9902,03	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9910	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9911	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9912	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9913,14	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9916	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9917	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9920	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R9921	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9927	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9929	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9930	EXB38V103J	RESISTOR ARRAY	1	
R9931,32	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9933-38	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9939	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9940,41	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9942	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9944	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9945,46	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9947	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9948	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9949	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9950	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9951,52	TAJAAH0101JV	M 100 OHM,J,1/16W	2	D0GB101JA006
R9954,55	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9958	ERJ3GEYJ474	M 470KOHM,J,1/16W	1	
R9959	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R9960	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R9961,62	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9965	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
R9966	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9967,68	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9977	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9978,79	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9980	TAJAAH0101JV	M 100 OHM,J,1/16W	1	D0GB101JA006
RL401,02	TSEH0005	RELAY	2	K6B1AGA00042 A
RL403	TSE10801	RELAY	1	K6B2AGA00017 A
RM001	PNA4601M05TV	REMOCO RECEIVER	1	
			1	
RTL	TNPA2542	CIRCUIT BOARD C1	1	⚠
RTL	TNPA2543	CIRCUIT BOARD C2	1	Δ
RTL	TNPA2626	CIRCUIT BOARD SU	1	Δ
RTL	TNPA2627	CIRCUIT BOARD SD	1	A
RTL	TNPA2249	CIRCUIT BOARD H3	1	⚠
RTL	TXN/F1MMSE	CIRCUIT BOARD F	1	⚠
RTL	TNPA2590	CIRCUIT BOARD Z	1	<b>A</b>
RTL	TZTNP01MMSB	CIRCUIT BOARD D1	1	⚠


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TNPA2589	CIRCUIT BOARD D2	1	<u>A</u>
RTL	TNPA2599	CIRCUIT BOARD P	1	Δ
RTL	TNPA2534AB	CIRCUIT BOARD SC	1	Δ
RTL	TNPA2535AB	CIRCUIT BOARD SS	1	Δ
RTL	TNPA2538	CIRCUIT BOARD SS4	1	Δ
RTL	TNPA2539	CIRCUIT BOARD SS5	1	$\Delta$
RTL	TNPA2622	CIRCUIT BOARD S1	1	Δ
RTL	TNPA2621	CIRCUIT BOARD V1	1	Δ
RTL	TXNHX10JBS	CIRCUIT BOARD HX	1	Δ
RTL	TZTNP010JBS	CIRCUIT BOARD (HX)	1	<u> </u>
	121111 010000	CIRCOTT BOARD (TIX)		<u> </u>
S061	TSE4GD0001	POWER SWITCH	1	K0F162B00002
S1554-56	EVQPBD05R	SWITCH	3	101 102 000002
2.004.00		3		
SC2	K1KA06A00180	6P CONNECTOR	1	
SC20	K1KA08A00232	8P CONNECTOR	1	
SC21	K1KA11A00078	11P CONNECTOR	1	
SC23	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SC41-44	K1KB40B00015	40P CONNECTOR	4	
SD1-D3	K1MN80B00004	80P CONNECTOR	3	
SS11	TJS3A9680	7P CONNECTOR	1	K1KA07A00095
SS12	K1KA05A00139	5P CONNECTOR	1	
SS23	TJS1A8870	11P CONNECTOR	1	K1KA11A00073
SS34	TJS1A8790	3P CONNECTOR	1	K1KA03A00213
SS40A	K1KB07A00037	7P CONNECTOR	1	
SS41A-6A	TJSF41013	13P CONNECTOR	6	K1MN13B00020
SS47A	K1KB07A00037	7P CONNECTOR	1	
SS48,49	K1KA07A00170	7P CONNECTOR	2	
SU1-U3	K1MN80B00004	80P CONNECTOR	3	
T404	ETC2FAD4C2AC	CWITCHING TO ANGEODIAGO		<u> </u>
T401	ETS25AD1C3AG	SWITCHING TRANSFORMER	1	<u>A</u>
T501	G4D4A0000051	SWITCHING TRANSFORMER	1	△
T502	G4D4A0000052	SWITCHING TRANSFORMER	1	Δ
T6451	G4D1A0000055	SWITCHING TRANSFORMER	1	
T6471	G4D1A0000055	SWITCHING TRANSFORMER	1	
V34	K1KA08B00005	8P CONNECTOR	1	
X3801	H0J202500002	CRYSTAL	1	
X9200	H1A3305B0005	CRYSTAL	1	
X9350	TSSA120	CRYSTAL	1	H0J327200038
X9450	TSSA081	CRYSTAL	1	H0J245500024
X9451	TSS9038-B	CRYSTAL	1	H0J200500016
X9601	H1A5005B0015	CRYSTAL	1	
X9602	H1A6505B0004	CRYSTAL	1	
X9603	H1A6005B0008	CRYSTAL	1	
X9701	TSS9038-B	CRYSTAL	1	H0J200500016


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
X9901	H0J921400003	CRYSTAL	1	
Z3	TJS1A8090	PHONO PIN (3P)	1	K1KA03B00045
Z4	TJS1A8100	PHONO PIN (4P)	1	K1KA04B00056
Z6	TJS1A8830	CONNECTOR	1	K1KA07A00056
Z10	TJS1A8800	4P CONNECTOR	1	K1KA04A00242
Z17	TJS1A8840	8P CONNECTOR	1	K1KA08A00221


## 18. Schematic Diagram for printing with A4

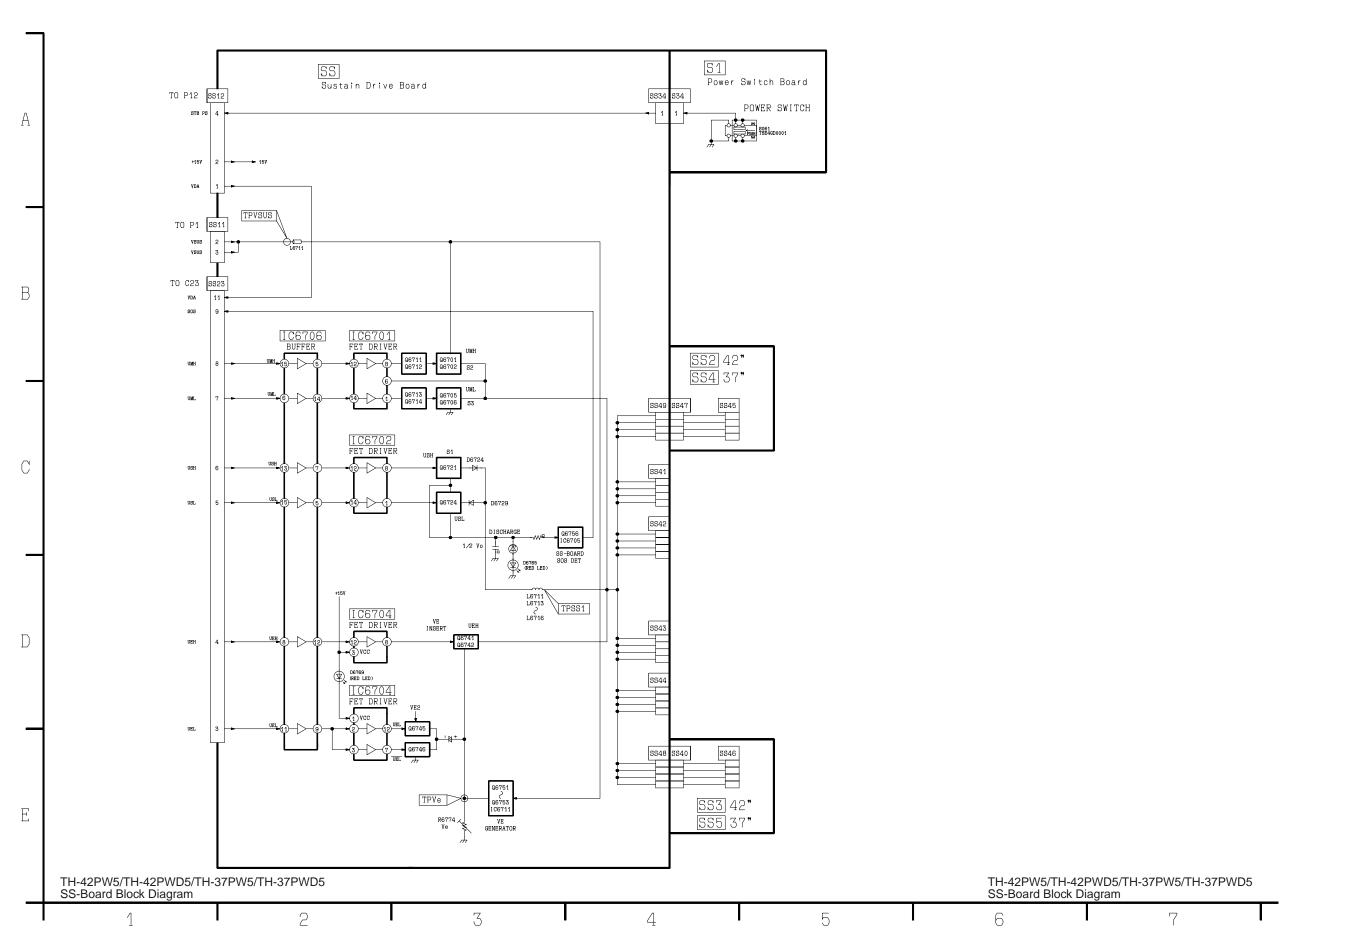


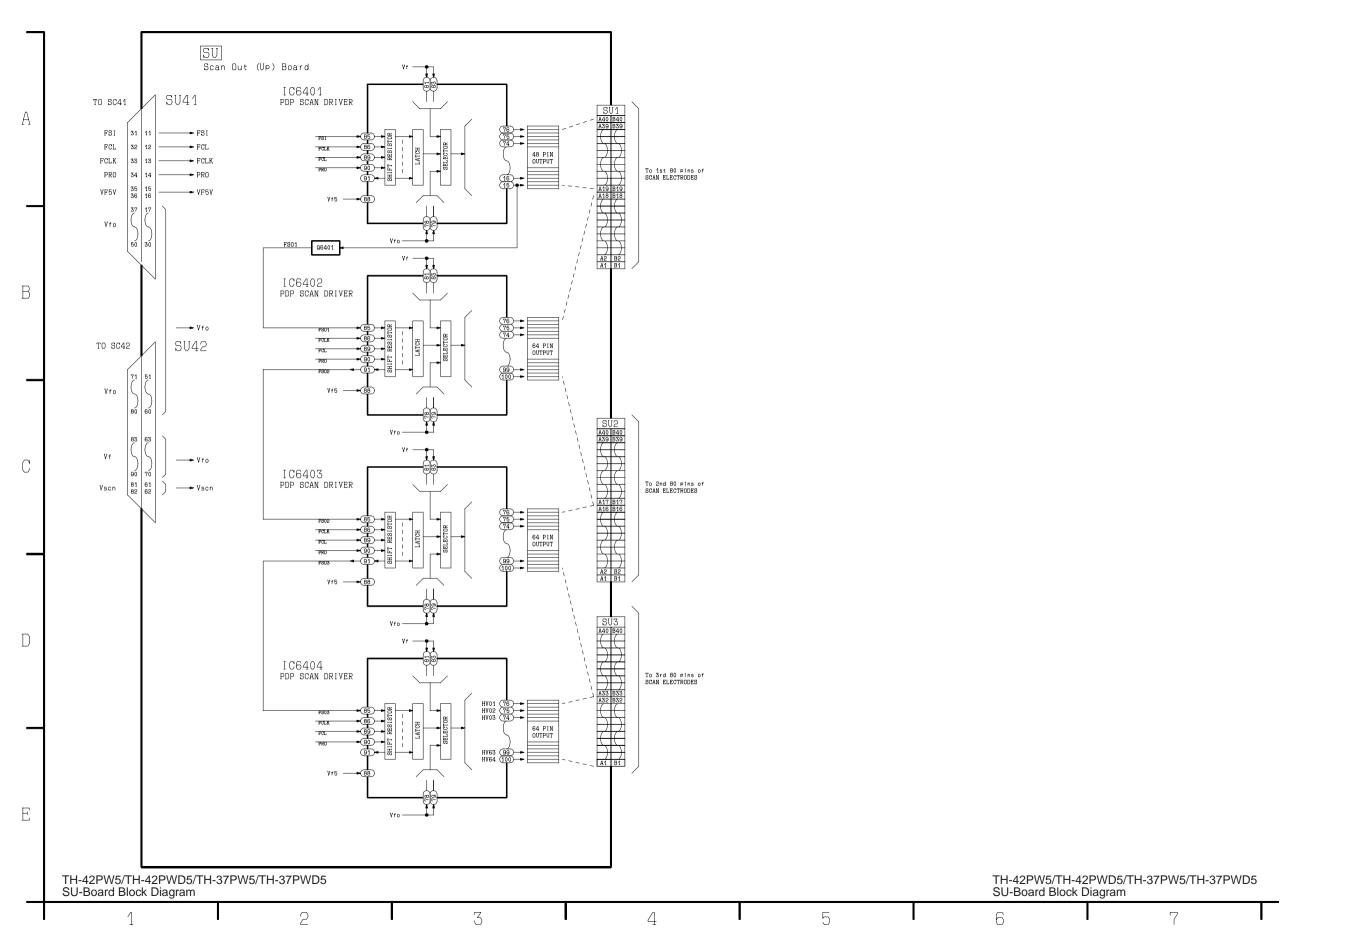


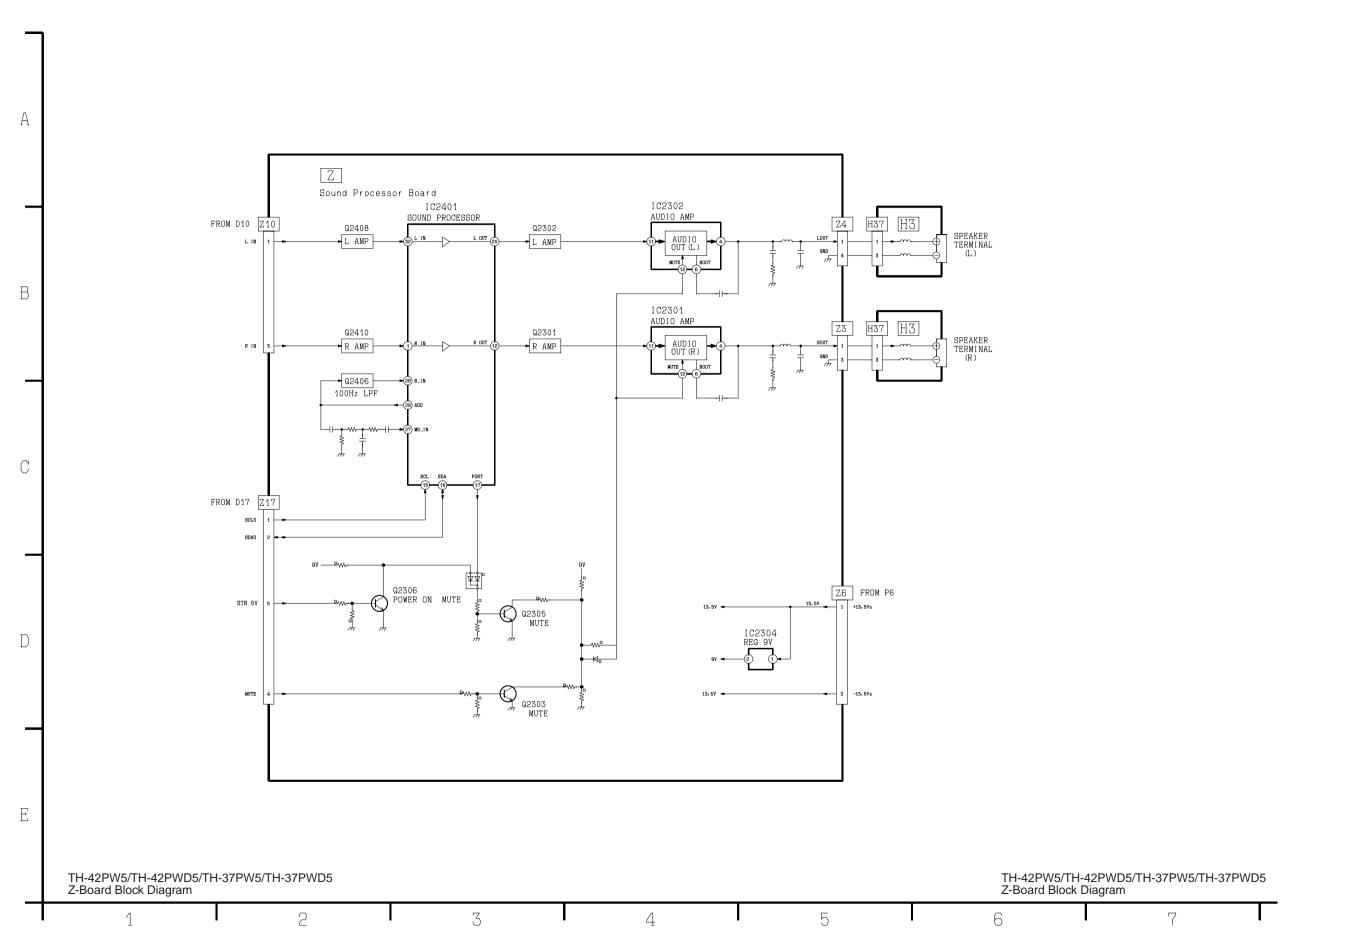

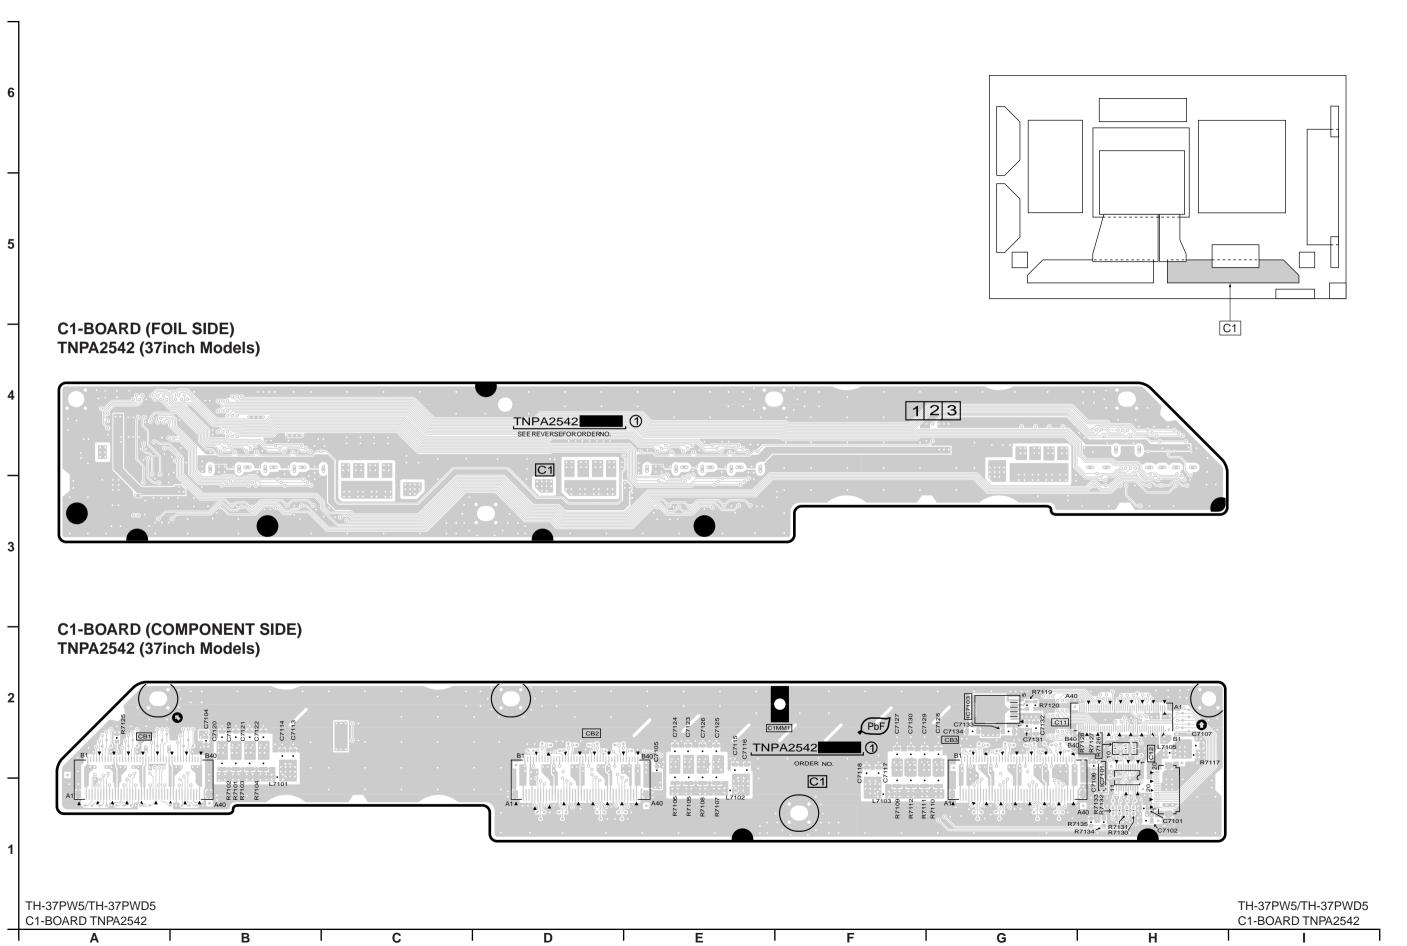

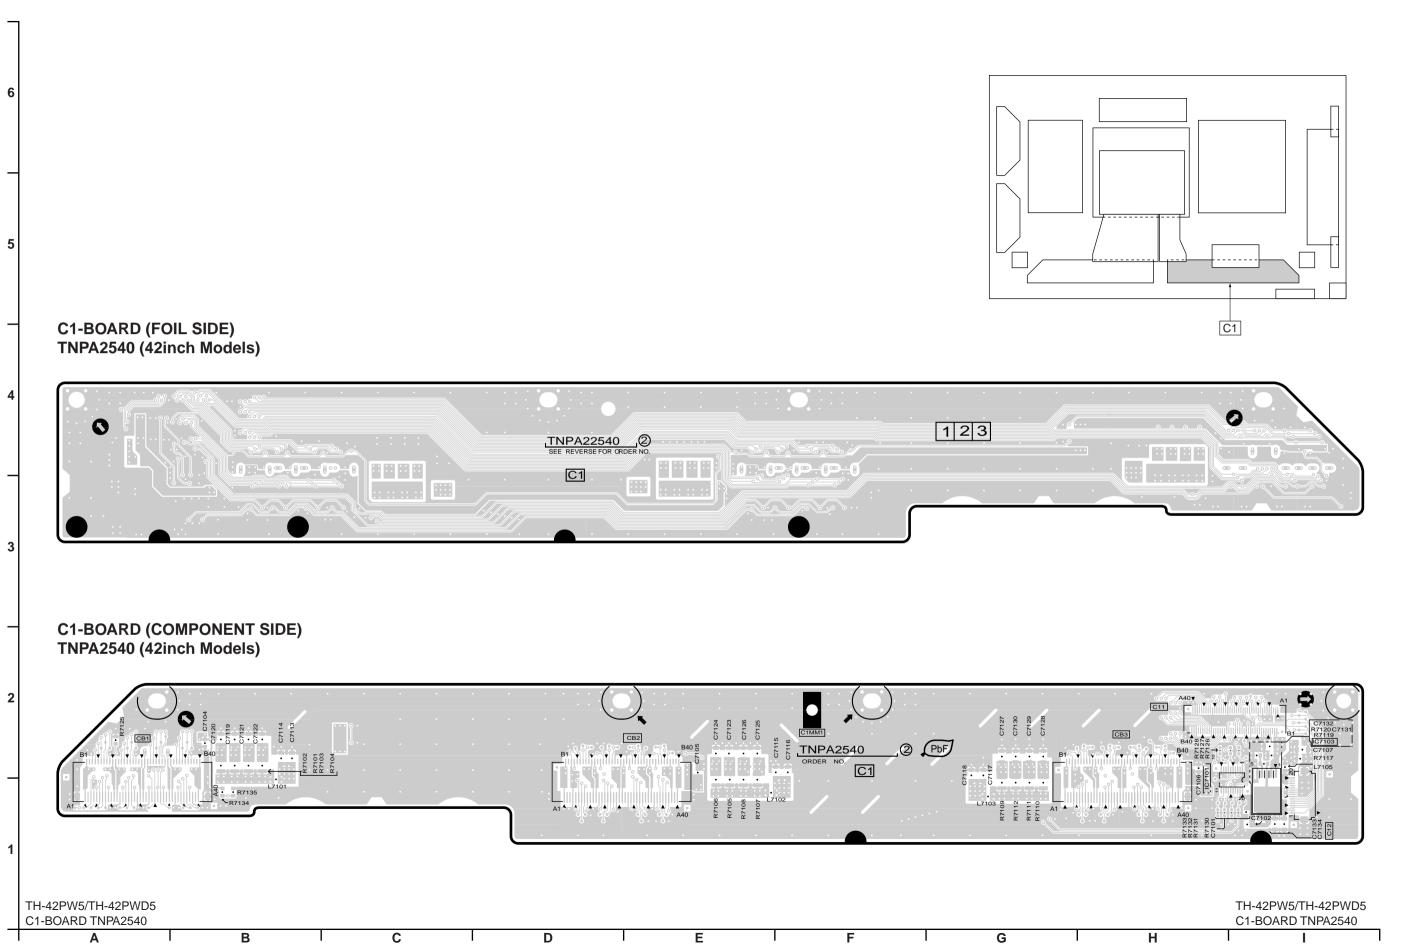

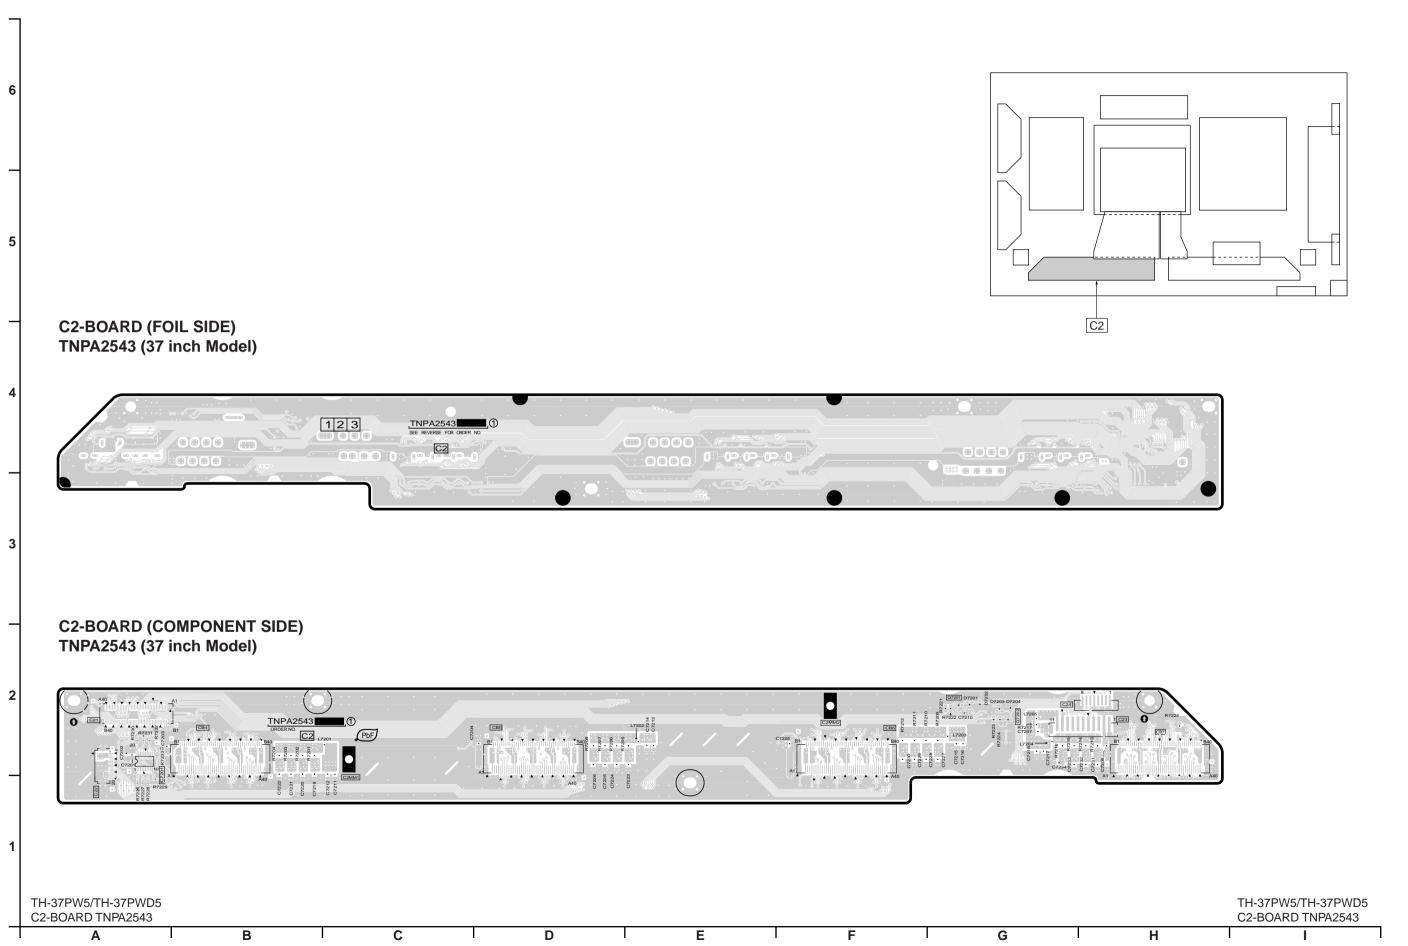

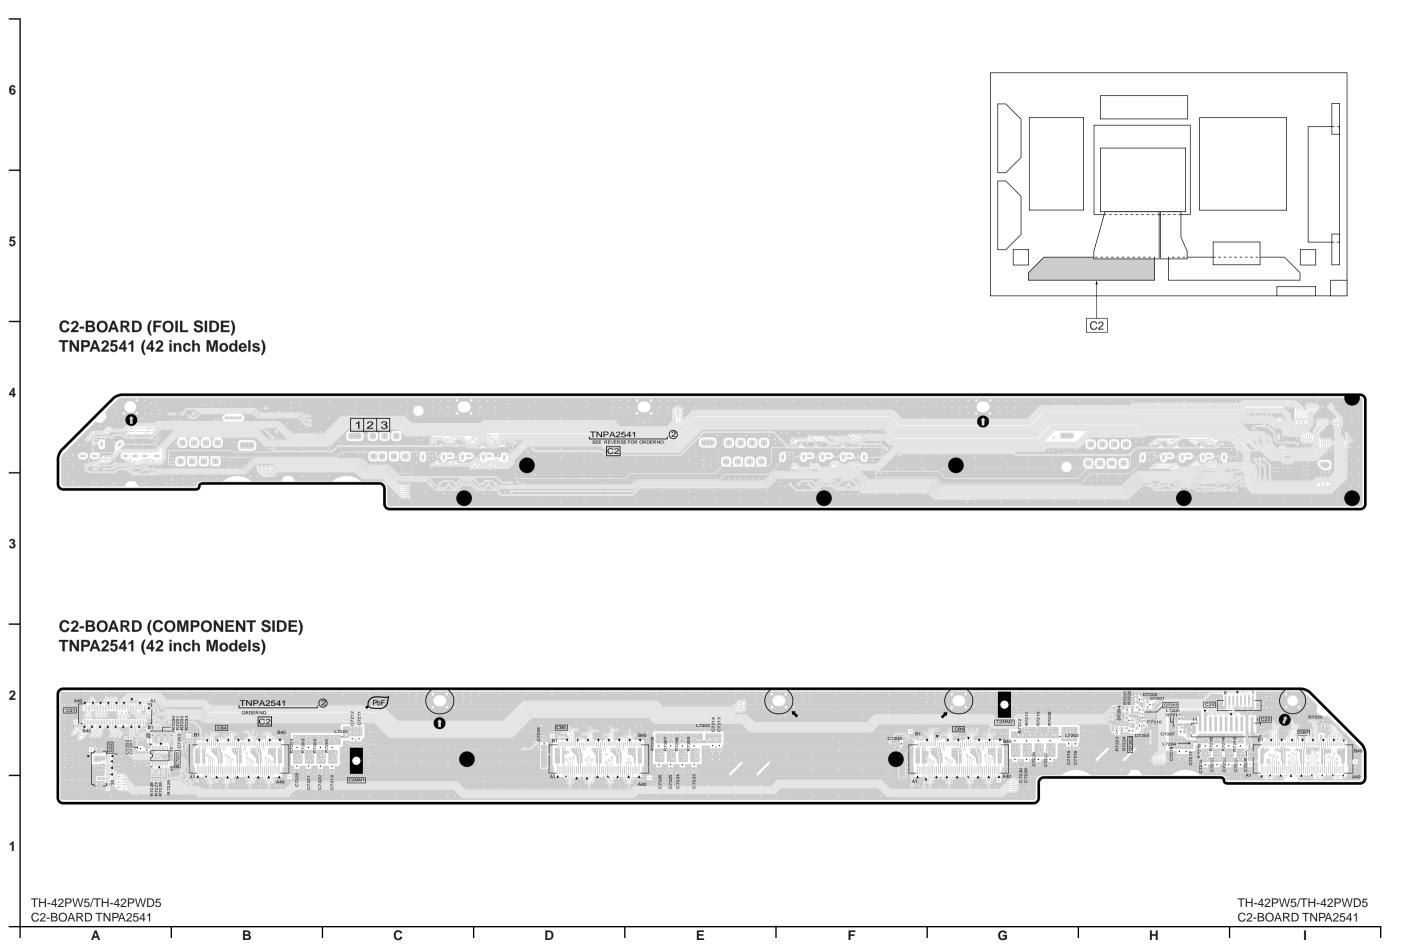


# D1-BOARD(COMPONENT SIDE) TZTNP01MMSB

6


5

2

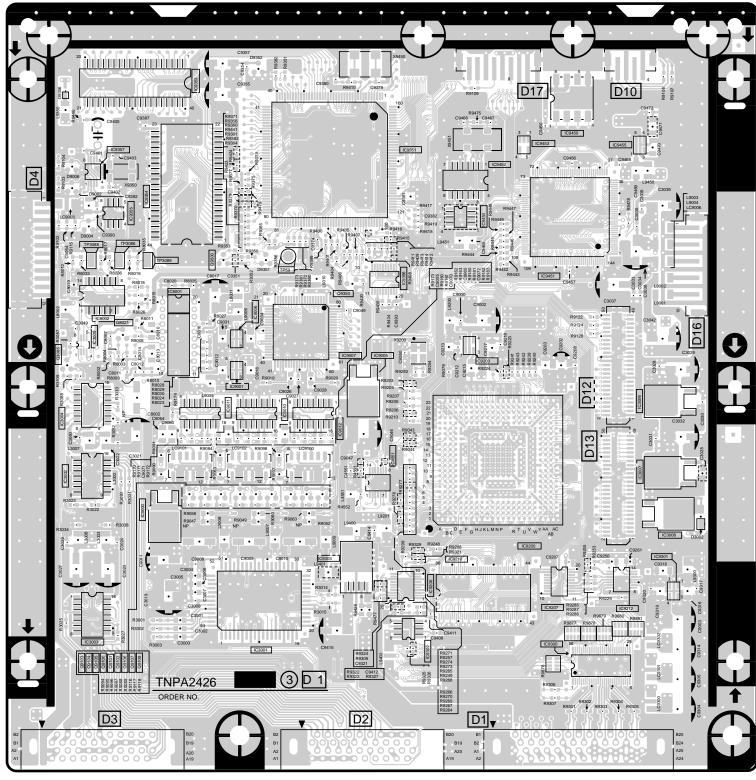

С

D

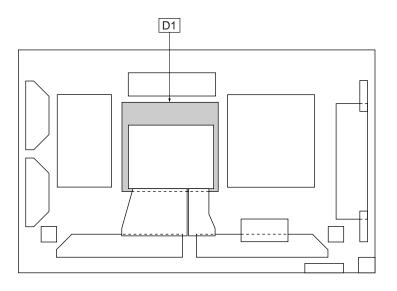

#### **Parts Location**

G

D1	I-BOARD (COI	MPONENT SIDI	Ε)	
IC		IC9354	B-5	
IC3001	B-2	IC9354	B-4	
IC3001	A-3	IC9355	C-4	
IC3002	A-3 A-2	IC9356 IC9357	A-5	
IC3003	A-2 A-3	IC9357	D-5	
IC3004	E-3	IC9451	D-3 D-4	
IC3000	E-3	IC9451	D-4 D-5	
IC3007	E-2	IC9453	D-5 D-5	
IC3008	A-4	IC9454	D-4	
IC4551	C-3	IC9455	E-5	
IC8001	B-4			
IC8001	A-4	TRANSISTOR		
IC9000	B-2	Q3085	A-4	
IC9001	B-3	Q8021	A-4	
IC9005	C-3	Q9100	A-1	
IC9006	B-4	Q9101	A-1	
IC9007	C-4	Q9103	A-1	
IC9010	C-3	Q9104	A-1	
IC9011	B-3	Q9105	A-1	
IC9012	C-3	Q9106	A-1	
IC9200	D-2	Q9107	B-1	
IC9203	D-3	Q9108	B-1	
IC9206	D-2	Q9350	C-4	
IC9207	D-2	Q9500	B-4	
IC9210	D-2	TP		
IC9212	E-2	1 F		
IC9300	D-2	TP3086	A-4	
IC9301	E-2	TP3088	A-4	
IC9303	C-2	TP3089	B-4	
IC9303	D-2	TP59	C-4	
IC9351	C-5			
IC9353	B-5			

В

Ε

# D1-BOARD(FOIL SIDE) TZTNP01MMSB

6


5

3


2

1

В

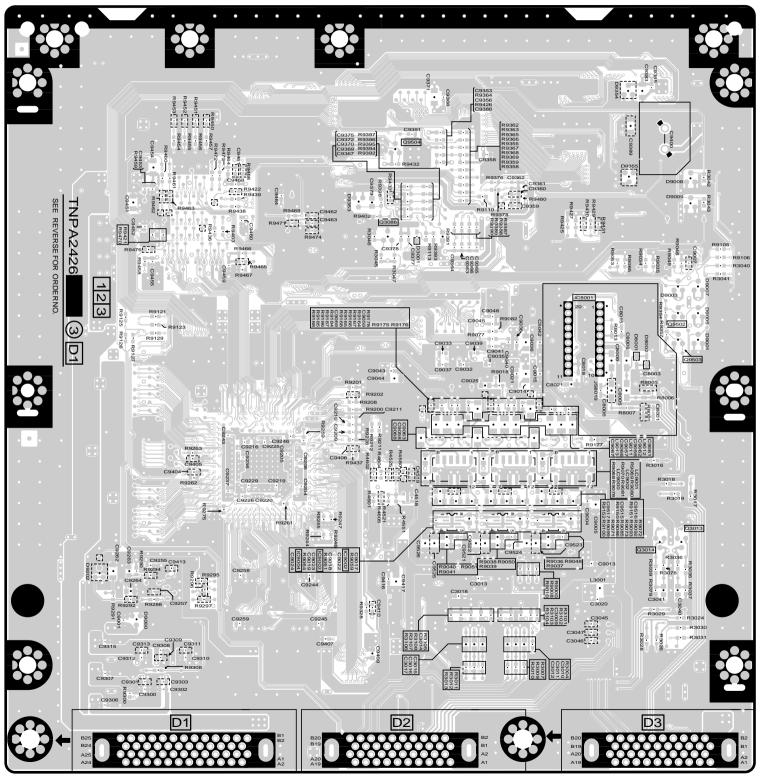

С

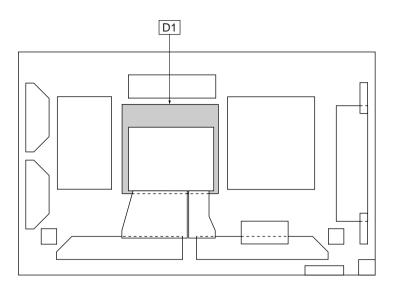

#### **Parts Location**

G

D1-BOARD (FOIL SIDE)					
IC		TRANSISTO	R		
IC8001 IC9002 IC9003 IC9004	E-4 C-2 C-2 C-2	Q3013 Q3014 Q3086 Q9502 Q9503 Q9504	E-2 E-2 C-4 E-4 E-4 C-5		

Е

D

D

Е

F

G

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5

D2-BOARD TNPA2589

Н

6

5

4

3

2

В

C

D

Е

F

G

С

В

6

5


4

3

2

1

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 D2-BOARD TNPA2589

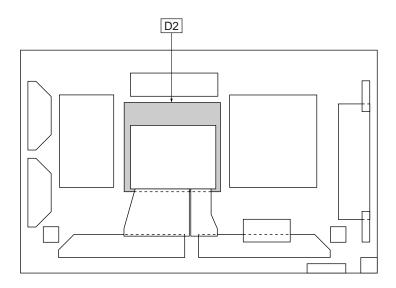

D2-BOARD (FOIL SIDE)					
IC		TRANSISTO	₹		
IC9550 IC9804 IC9808 IC9810 IC9812 IC9817 IC9819 IC9821	B-2 F-3 E-3 F-2 E-2 F-2 F-1	Q9501 Q9701 Q9703 Q9901 Q9902 Q9904 Q9905	B-1 F-4 F-4 B-3 B-4 C-1 B-3		
IC9902 IC9905	B-3				

#### **Parts Location**


	D2-BOARD (COMPONENT SIDE)						
IC  IC9551 IC9552 IC9553 IC9554 IC9555 IC9601 IC9602 IC9603	F-4 D-5 E-2 E-1 E-6 D-3 D-5 E-3	2-BOARD (COI IC9802 IC9803 IC9805 IC9806 IC9807 IC9809 IC9811 IC9813 IC9814 IC9815	B-3 B-4 C-3 C-3 C-2 B-3 B-3 B-2 C-2	TRANSISTO  Q9502  Q9702  Q9802  Q9903  Q9906  Q9907  Q9908	R E-2 B-4 C-1 D-1 C-2 C-1		
IC9604 IC9605 IC9612 IC9700 IC9701 IC9702 IC9703 IC9704 IC9710 IC9711 IC9711 IC9712 IC9801	E-4 E-5 D-4 C-5 C-4 B-5 C-5 B-5 B-5 B-5 A-5 A-4	IC9816 IC9818 IC9820 IC9822 IC9900 IC9904 IC9907	C-2 C-1 B-2 B-2 B-1 D-2 D-1 F-4	TP TPD21 TPD22	E-6 E-6		


# F-BOARD TXN/F10MMS (UY/UZ VERSION)

6


3

2

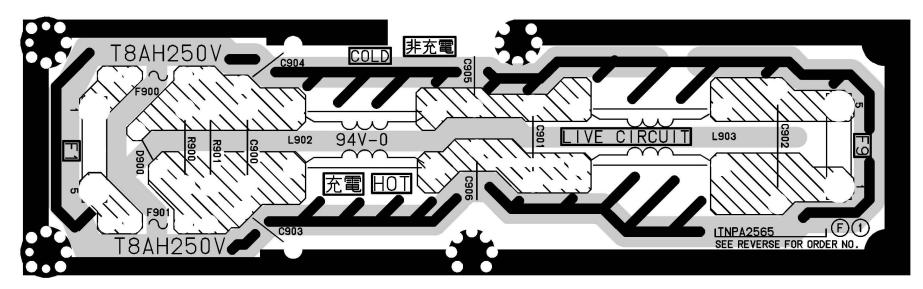

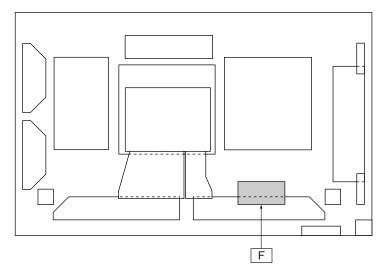


# F-BOARD TXN/F1MMSE (Except UY/UZ VERSION)

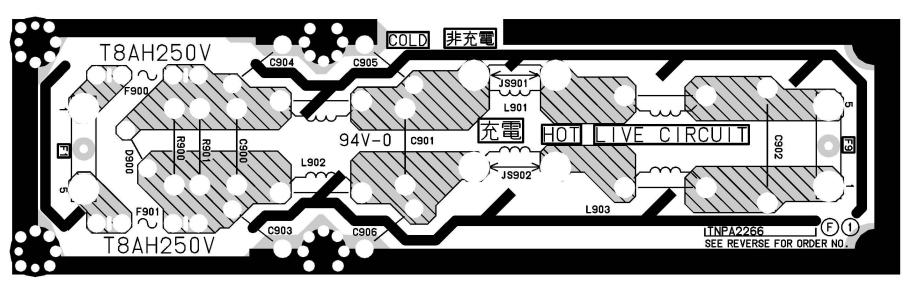


С




6

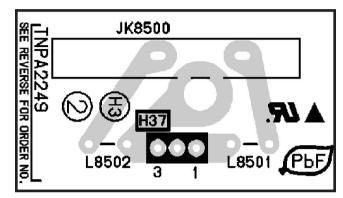


# S1-BOARD(FOIL SIDE) TNPA2622




# S1-BOARD(COMPONENT SIDE) TNPA2622




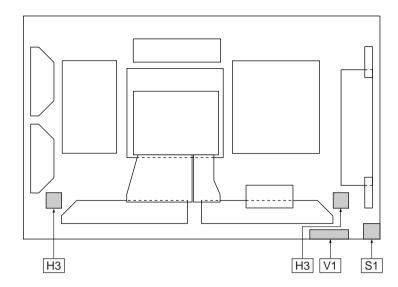

# V1-BOARD(FOIL SIDE) TNPA2621

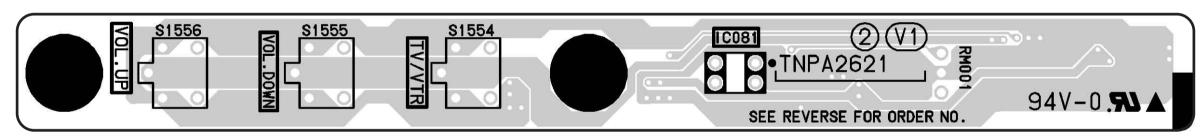

# V1-BOARD(COMPONENT SIDE) TNPA2621

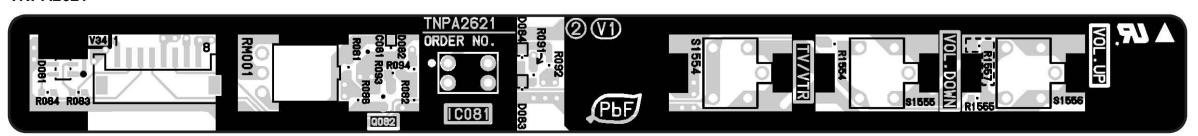

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 H3-BOARD TNPA2249 S1-BOARD TNPA2622 V1-BOARD TNPA2621 TH-42PW5/TH-42PWD5/TH-37PWD5 H3-BOARD TNPA2249 S1-BOARD TNPA2622

V1-BOARD TNPA2621

Α

В

С


D


E

•

G

H

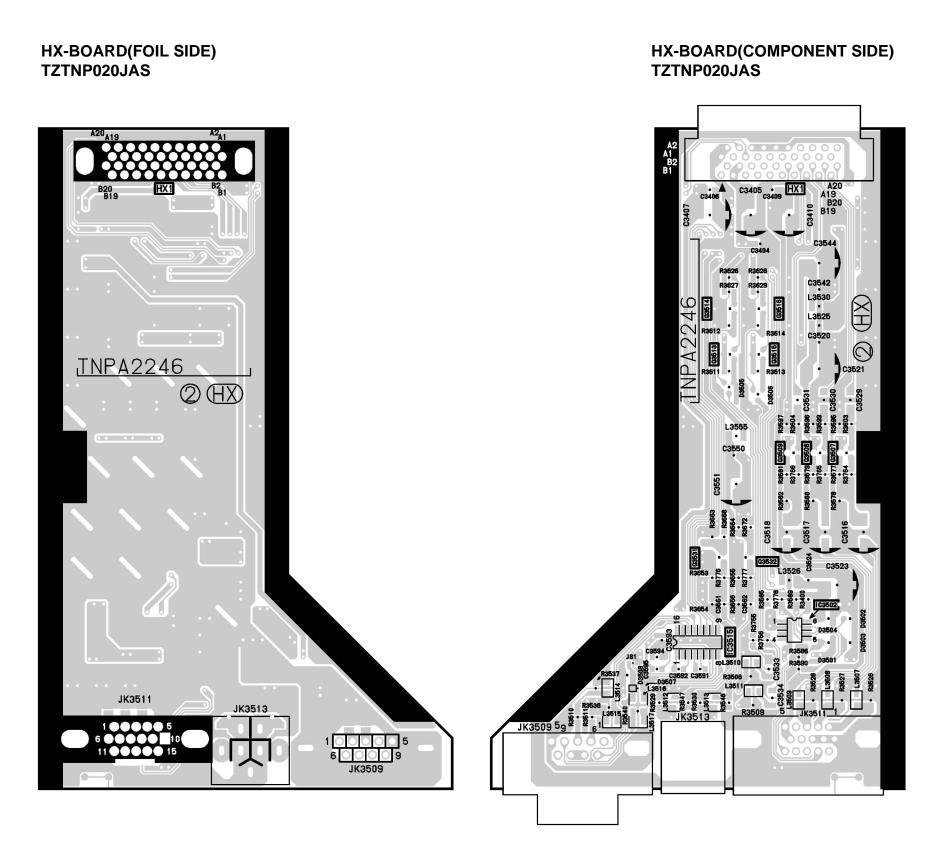

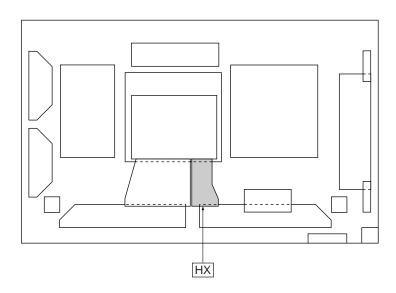

HX-BOARD					
С		TRANSISTO	R		
IC3502	F-2	Q3507	F-3		
IC3515	E-2	Q3508	F-3		
		Q3509	F-3		
		Q3513	E-4		
		Q3514	E-4		
		Q3515	F-4		
		Q3516	F-4		
		Q3531	E-3		
		Q3532	F-3		

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HX-BOARD TZTNP020JAS

Α

6

5

4

3

2

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HX-BOARD TZTNP020JAS

В


С


D


Е

G

OARD TZTNP020JAS **H** 

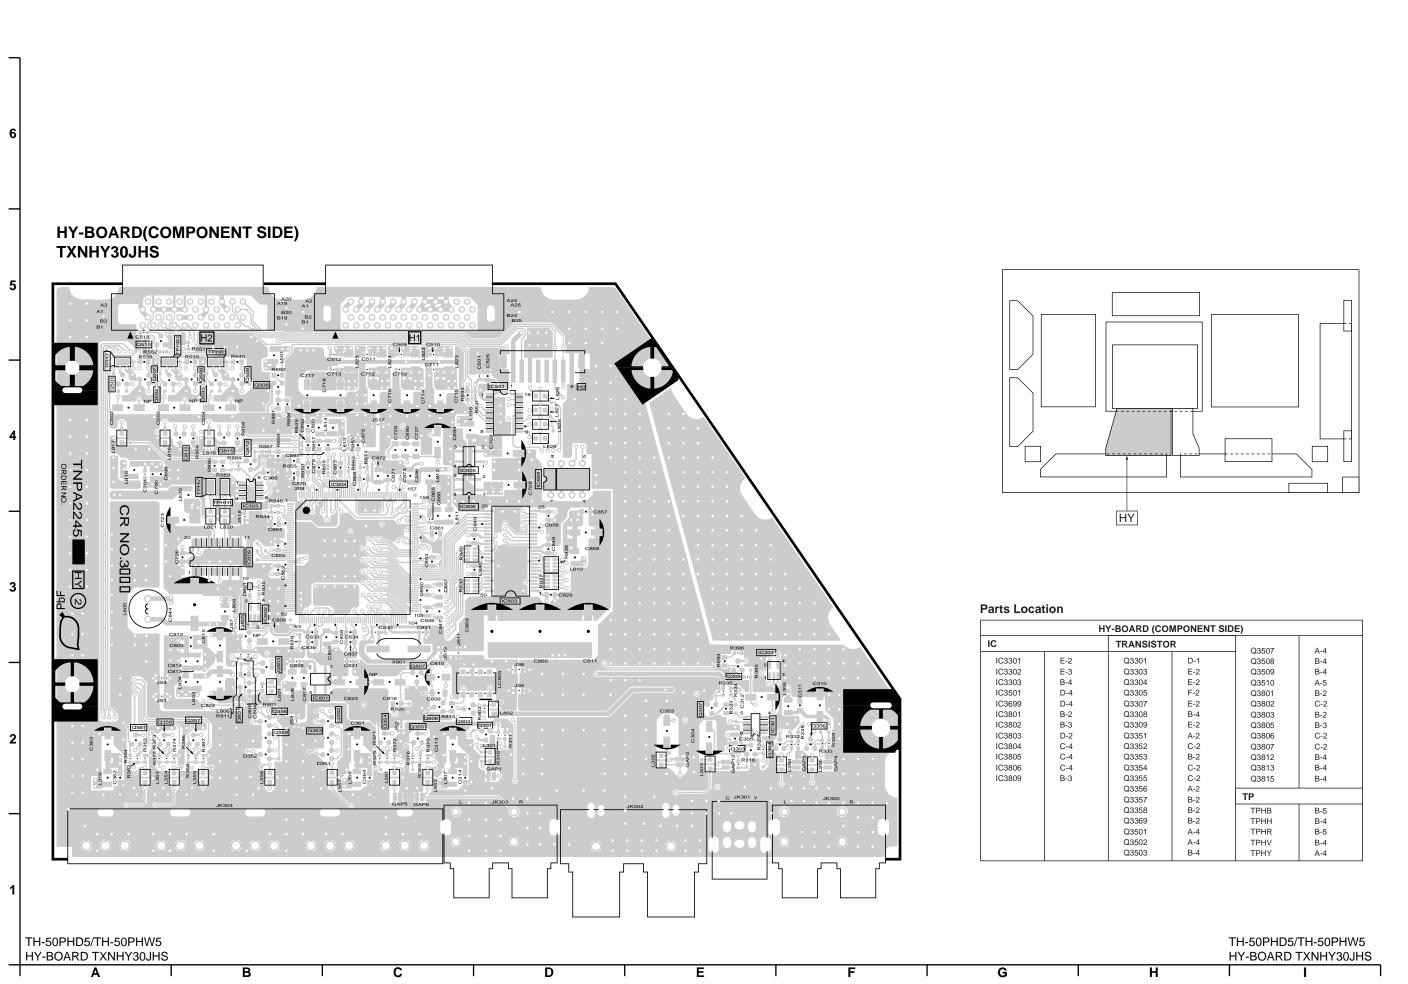

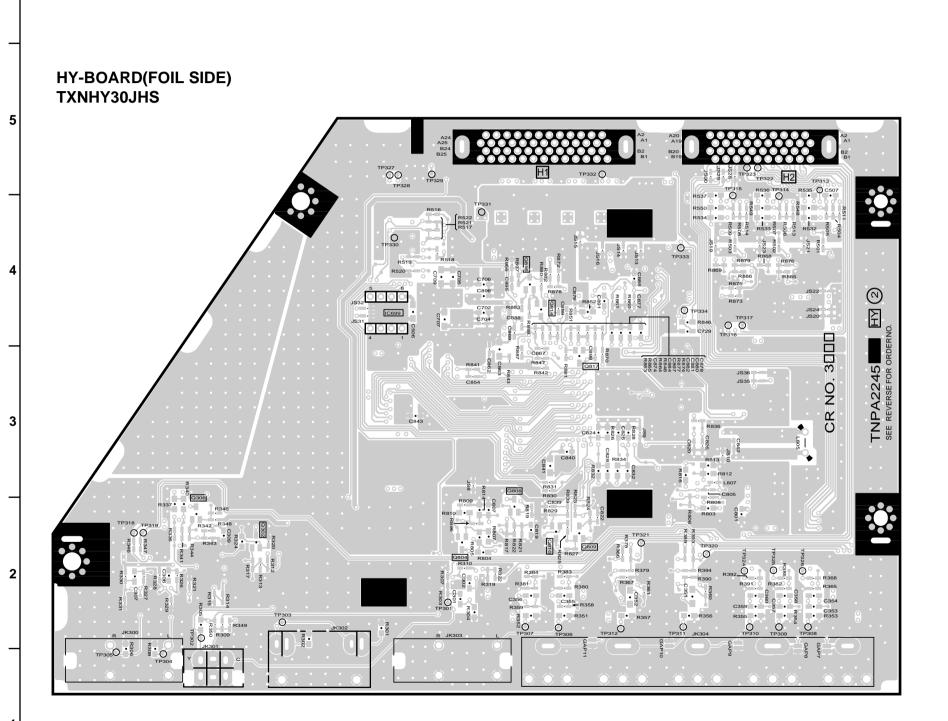

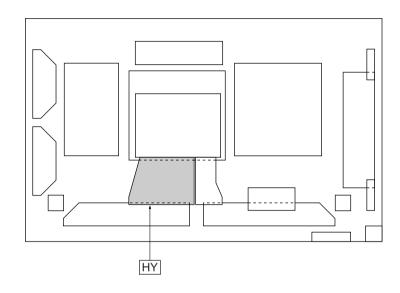

G

HY-BOARD (FOIL SIDE)					
IC		TRANSISTOR			
IC3699	C-4	Q3302	B-2		
		Q3306	B-2		
		Q3804	C-2		
		Q3808	D-2		
		Q3809	D-2		
		Q3810	D-2		
		Q3814	D-4		
		Q3816	D-4		
		Q3817	D-3		

Н

TH-50PHD5/TH-50PHW5 HY-BOARD TXNHY30JHS

Α

В


С

D

Е


TH-50PHD5/TH-50PHW5 HY-BOARD TXNHY30JHS

# **HZ-BOARD(COMPONENT SIDE)** TXNHY40JHS

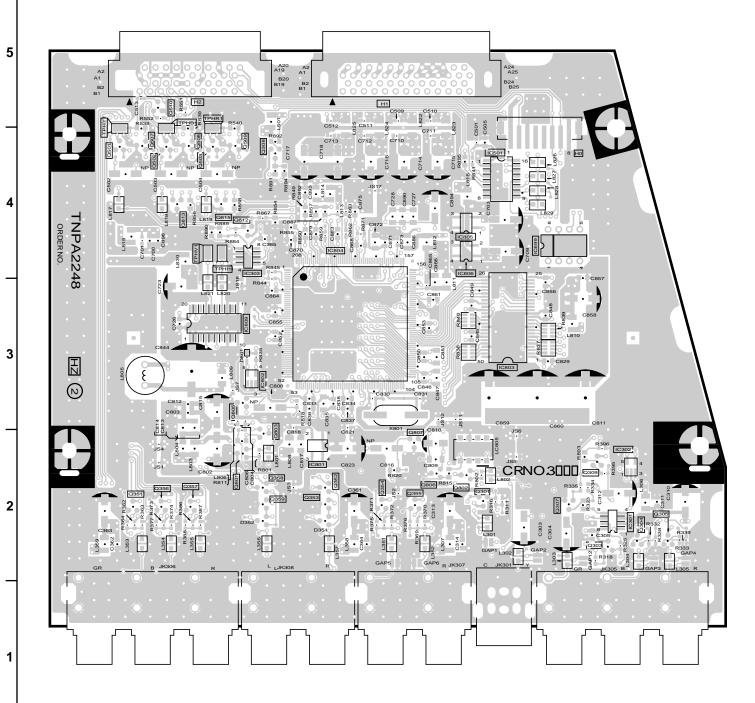

С

D

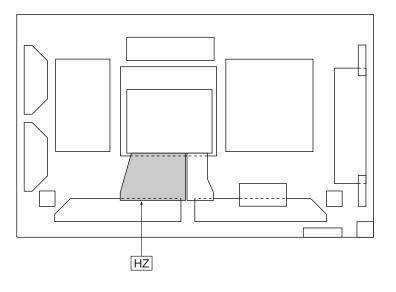

#### **Parts Location**

	HZ-BOARD (COMPONENT SIDE)							
IC		TRANSISTO	R	Q3507	A-4			
IC3301	E-2	Q3301	D-2	Q3507	B-4			
IC3301	E-2	Q3303	D-2	Q3509	B-4			
IC3302	D-2	Q3304	E-2	Q3510	B-5			
IC3303	B-4	Q3305	E-2	Q3801	B-2			
IC3501	D-4	Q3307	D-2	Q3802	C-2			
IC3699	D-4	Q3308	B-4	Q3803	B-2			
IC3801	B-2	Q3309	D-2	Q3805	B-3			
IC3802	B-3	Q3351	A-2	Q3806	C-2			
IC3803	D-3	Q3352	C-2	Q3807	C-2			
IC3804	C-4	Q3353	B-2	Q3812	B-4			
IC3805	C-4	Q3354	C-2	Q3813	B-4			
IC3806	C-4	Q3355	C-2	Q3815	B-4			
IC3809	B-3	Q3356	A-2					
		Q3357	B-2	TP				
		Q3358	B-2	TPHB1	B-5			
		Q3359	B-2	TPHH1	B-4			
		Q3501	A-4	TPHR1	B-5			
		Q3502	A-4	TPHV1	B-4			
		Q3503	B-4	TPHY1	A-4			


TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5


В

HZ-BOARD TXNHZ40JJS

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HZ-BOARD TXNHZ40JJS Ε G

# HZ-BOARD(FOIL SIDE) TXNHZ40JJS

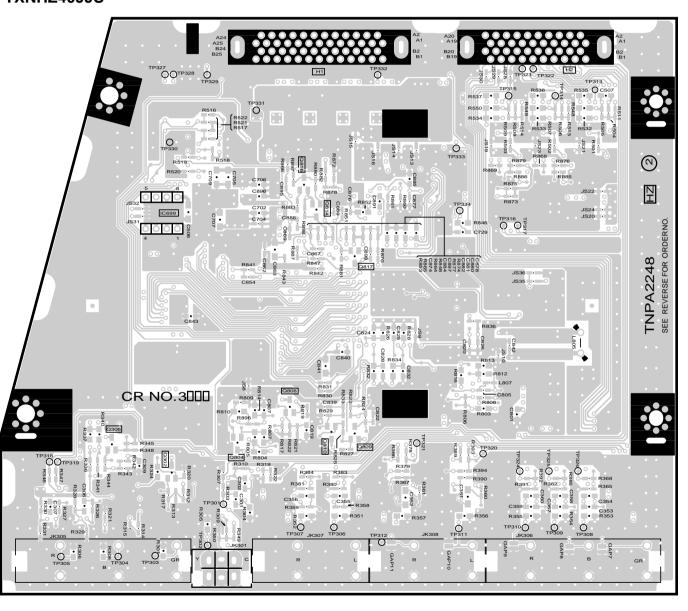

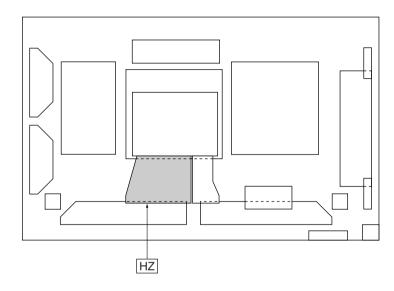

## **Parts Location**

HZ-BOARD (FOIL SIDE)					
IC		TRANSISTO	R		
IC3699	B-4	Q3302	B-2		
		Q3306	A-2		
		Q3804	B-2		
		Q3808	C-3		
		Q3809	C-2		
		Q3810	C-2		
		Q3814	C-4		
		Q3816	C-4		
		Q3817	C-3		

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HZ-BOARD TXNHZ40JJS TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HZ-BOARD TXNHZ40JJS

HZ-BOARD TXNHZ40JJS **A** I

2

1

В

С


D

Е

F

G

H

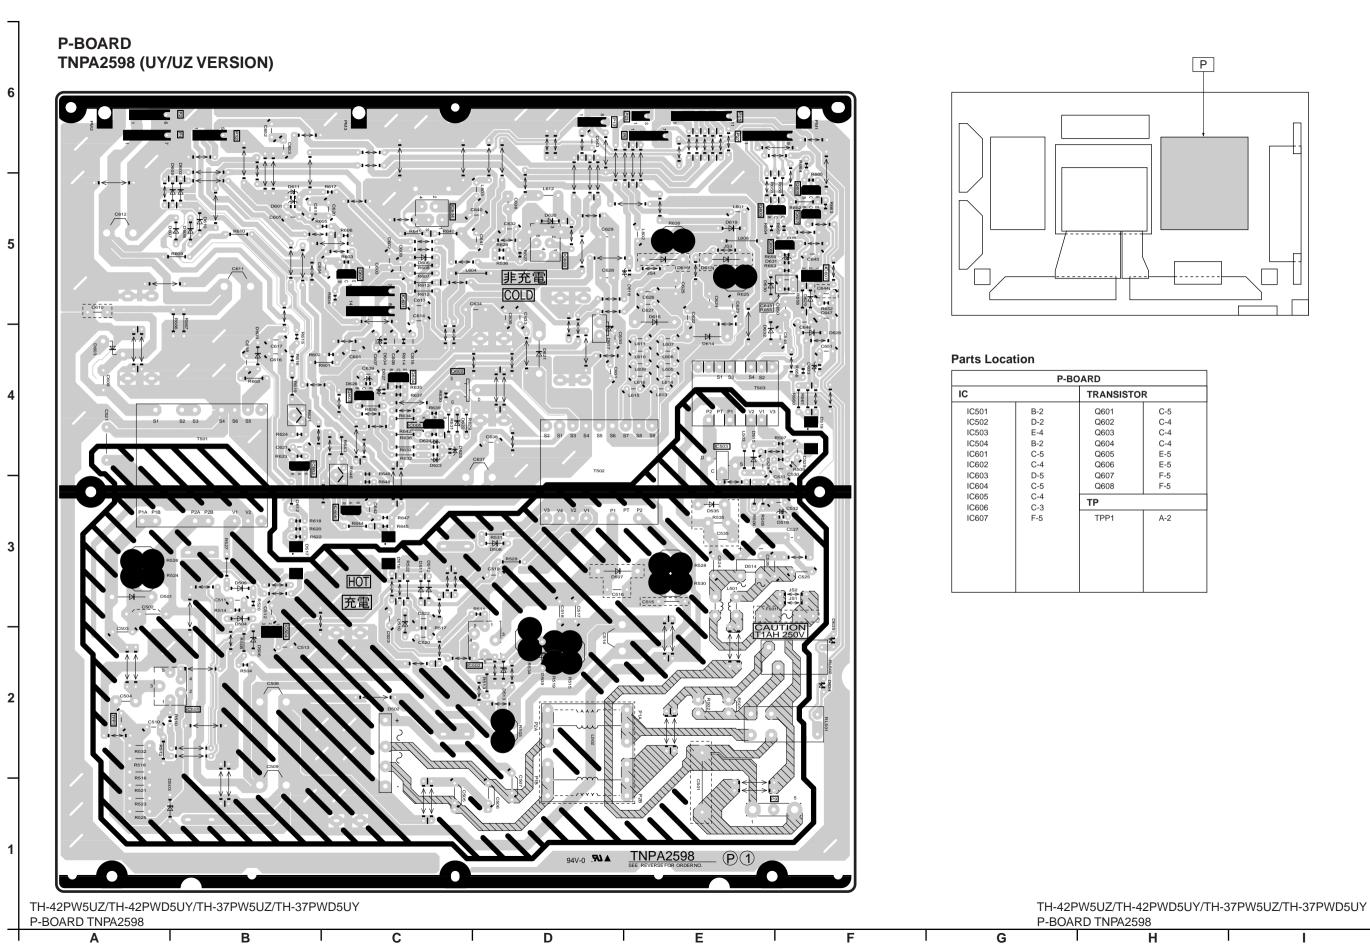

# P-BOARD (COMPONENT SIDE) **TNPA2590 (EXCEPT UY/UZ VERSION)** ಾ ా ్ల P1 PT P2 D415 R413 O N D520 C417 [C410

6

5


4

3

2

1

P-BOARD TNPA2599

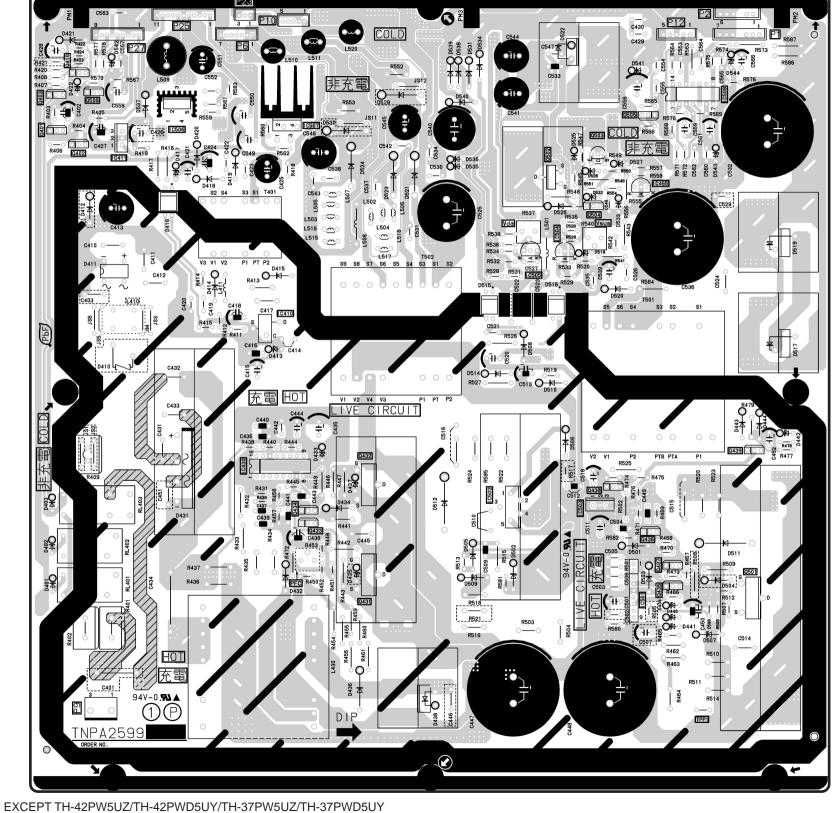

C

D

Ε

Н

G

C


D

Ε

F

G

EXCEPT TH-42PW5UZ/TH-42PWD5UY/TH-37PW5UZ/TH-37PWD5UY P-BOARD TNPA2599

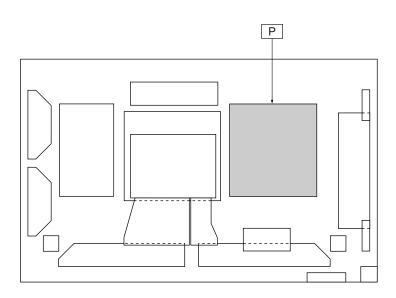

	P-BOARD (FOIL SIDE)						
IC		TRANSISTO	R	TP			
IC410 IC411 IC430 IC465 IC501 IC502 IC503 IC504 IC505	D-4 E-5 D-3 B-5 B-2 C-3 B-3 C-4 C-4	Q401 Q402 Q403 Q410 Q431 Q432 Q433 Q434 Q435	F-5 F-5 F-5 D-2 D-3 D-3 D-3 B-2	TPP1	B-1		
IC506 IC507 IC508	E-5 D-5 B-5	Q436 Q437 Q438 Q439 Q501 Q502 Q503 Q503 Q504 Q505 Q506	B-2 B-2 B-3 A-3 A-2 C-5 B-5 B-5 B-5				

#### **Parts Location**

	P-BOARD (COMPONENT SIDE)						
IC		TRANSISTO	R	TP			
IC410	B-4	Q401	A-5	TPP1	E-1		
IC411	A-5	Q402	A-5				
IC430	B-3	Q403	A-5				
IC465	E-5	Q410	A-6				
IC501	E-2	Q431	C-2				
IC502	D-3	Q432	C-3				
IC503	D-3	Q433	C-2				
IC504	D-4	Q434	C-3				
IC505	D-4	Q435	E-2				
IC506	B-5	Q436	E-2				
IC507	C-5	Q437	E-2				
IC508	E-5	Q438	E-3				
		Q439	E-3				
		Q501	E-2				
		Q502	D-5				
		Q503	D-5				
		Q504	D-5				
		Q505	E-5				
		Q506	A-5				

TH-37PW5/TH-37PWD5 SC-BOARD TNPA2534AC

C


D

6

5

3

2

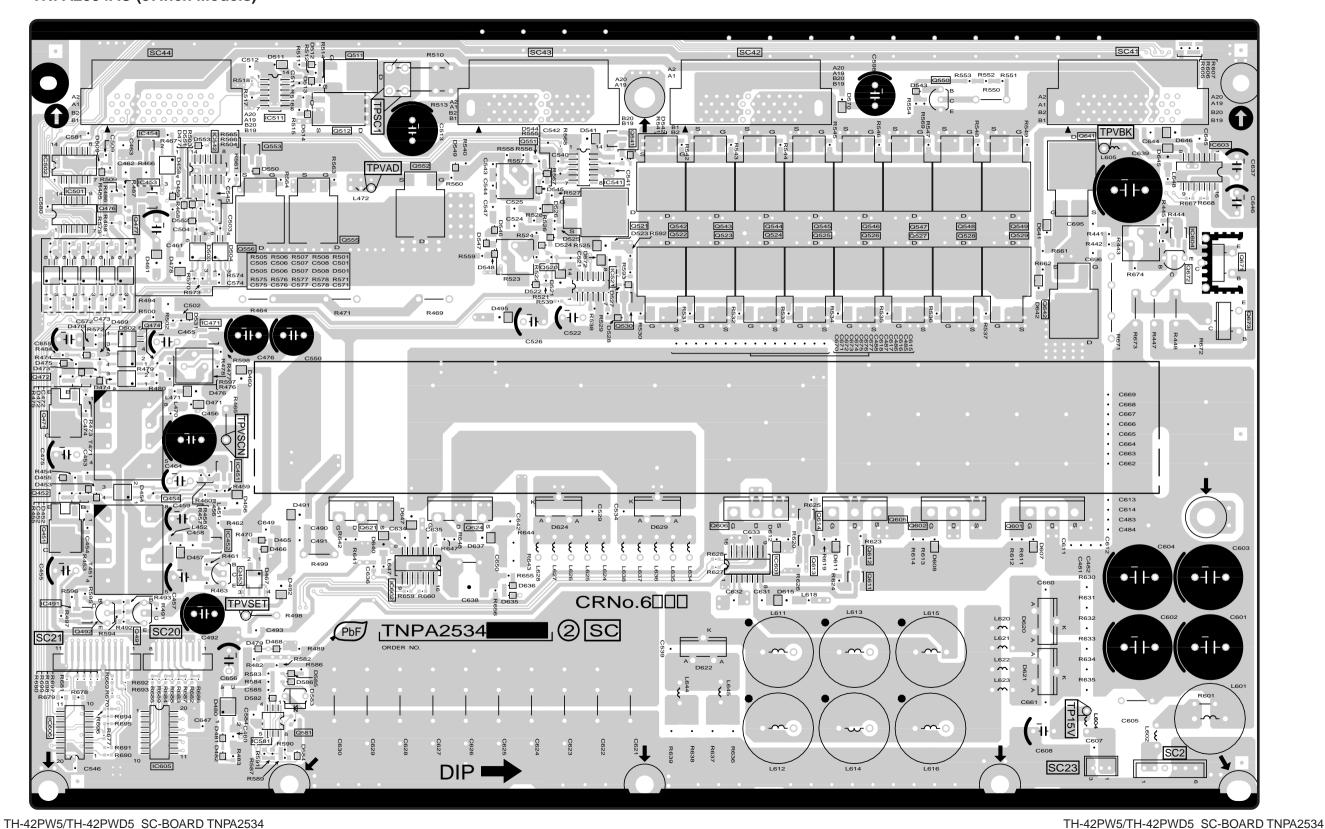


Ε

F

G

TH-37PW5/TH-37PWD5 SC-BOARD TNPA2534AC


SC-BOARD (FOIL SIDE) TNPA2534 (42inch Models) **TNPA2534AC (37inch Models)** R510 TP63 TP69 TP69 TP69 TP69 5 1 2 3 4 5 6 2 sc CRNo.6□□□ C475 2 D583 SC23 TH-42PW5/TH-42PWD5 SC-BOARD TNPA2534 TH-42PW5/TH-42PWD5 SC-BOARD TNPA2534 TH-37PW5/TH-37PWD5 SC-BOARD TNPA2534AC TH-37PW5/TH-37PWD5 SC-BOARD TNPA2534AC С Е G D F Н

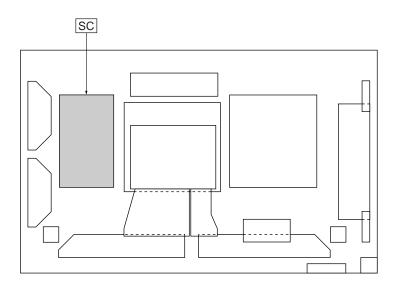


SC-BOARD (FOIL SIDE)						
TRANSISTO	R	TP		TP33	D-1	
Q6453 Q6491 Q6492 Q6550 Q6601 Q6602 Q6605 Q6606 Q6621 Q6624 Q6671 Q6672 Q6673	H-2 H-2 H-2 C-5 B-3 C-3 C-3 D-3 G-3 F-3 A-4 A-4	TP1 TP2 TP4 TP5 TP6 TP7 TP8 TP9 TP10 TP11 TP12 TP13 TP14 TP15 TP16 TP18 TP19 TP20 TP21 TP22 TP23 TP24 TP25 TP26 TP27 TP28 TP29 TP20 TP21 TP22 TP23 TP24 TP25 TP26 TP27 TP28 TP29 TP30 TP31 TP30 TP31 TP32	A-1 A-1 A-2 A-2 B-1 B-1 B-1 B-1 H-2	1P33 TP34 TP35 TP36 TP37 TP38 TP46 TP47 TP48 TP49 TP50 TP51 TP54 TP55 TP56 TP57 TP58 TP59 TP60 TP61 TP62 TP63	D-1 C-1 C-1 A-5 A-5 H-6 H-6 H-6 H-6 C-6 C-6 C-6 G-6 G-6 G-6 G-6	

#### **Parts Location**


		SC-BOARD (CC	MPONENT SIE	DE)			
IC		TRANSISTO	OR .	Q6547	G-5	TP	
IC6451 IC6452 IC6453 IC6454 IC6471 IC6491 IC6501 IC6502 IC6511 IC6541 IC6542 IC6581 IC6603 IC6603 IC6604 IC6605 IC6606	B-3 B-2 A-5 A-5 B-4 A-2 A-5 B-5 E-5 B-1 F-2 C-2 I-5 B-1 A-1	Q6451 Q6452 Q6453 Q6453 Q6454 Q6471 Q6472 Q6474 Q6476 Q6477 Q6491 Q6492 Q6511 Q6522 Q6521 Q6522 Q6525 Q6526 Q6527 Q6526 Q6527 Q6528 Q6528 Q6524 Q6528 Q6524 Q6528	A-3 A-3 B-2 B-3 A-4 B-4 A-5 A-5 A-2 C-6 C-5 D-4 E-5 E-5 F-5 G-5 G-5 G-5 G-5 E-4 E-5 F-5 F-5 F-5 F-5 F-5 F-5 F-5 F-5 F-5 F	Q6548 Q6549 Q6550 Q6551 Q6551 Q6552 Q6553 Q6556 Q6556 Q6581 Q6601 Q6602 Q6605 Q6606 Q6611 Q6612 Q6613 Q6614 Q6621 Q6624 Q6624 Q6641 Q6642 Q6647 Q6642 Q6671 Q6672 Q6673	G-5 G-6 G-6 D-5 C-5 B-5 C-5 B-4 B-1 G-3 F-2 F-2 F-2 F-3 D-3 H-5 H-4 H-4	TP15V TPVAD TPVBK TPVSCN TPVSET	H-1 C-5 H-5 B-3 B-2

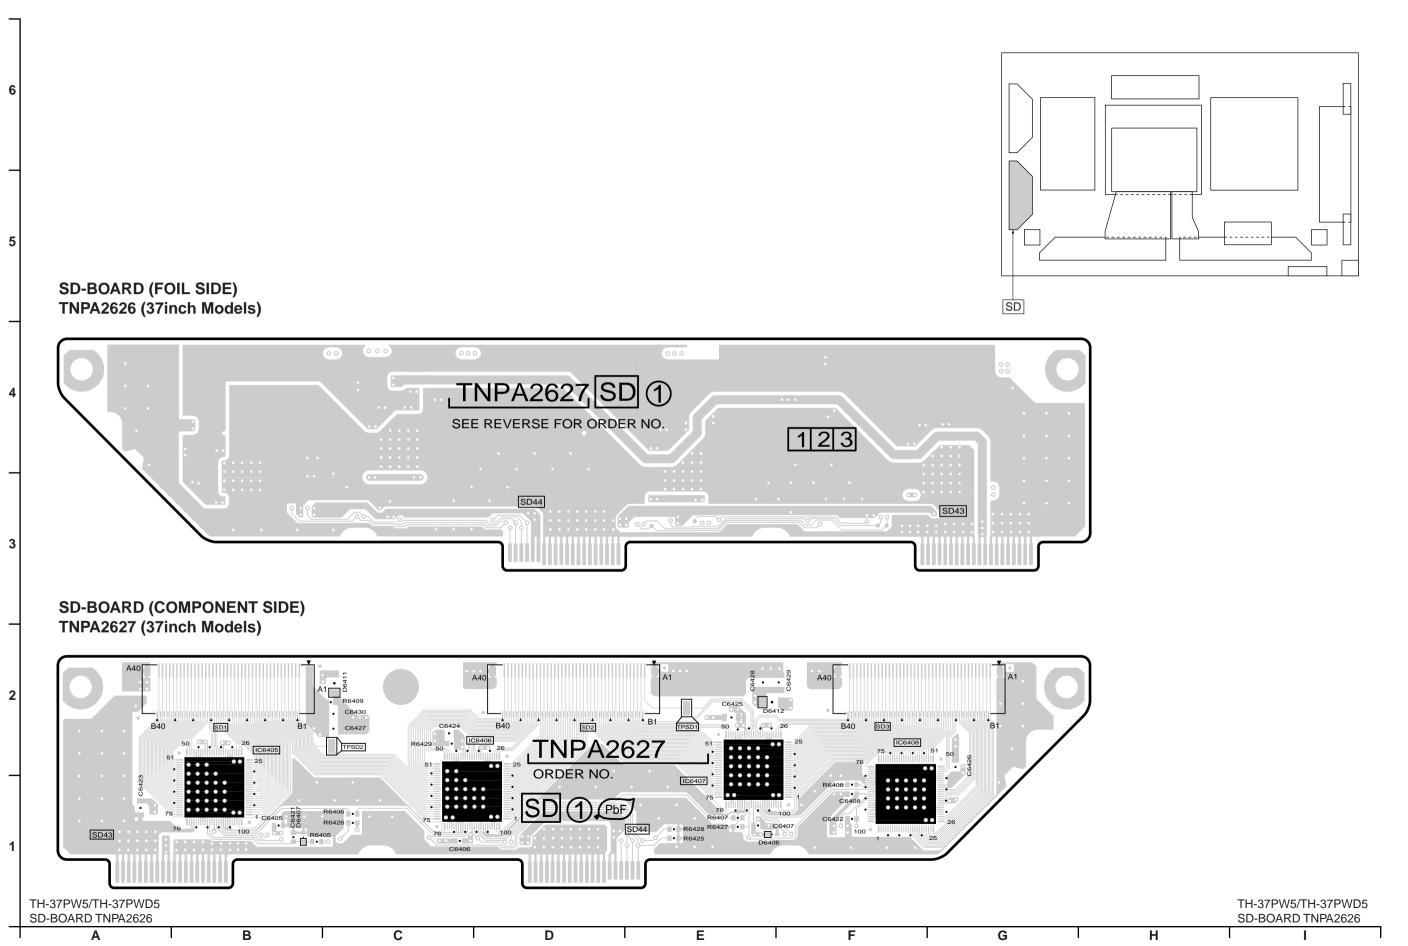

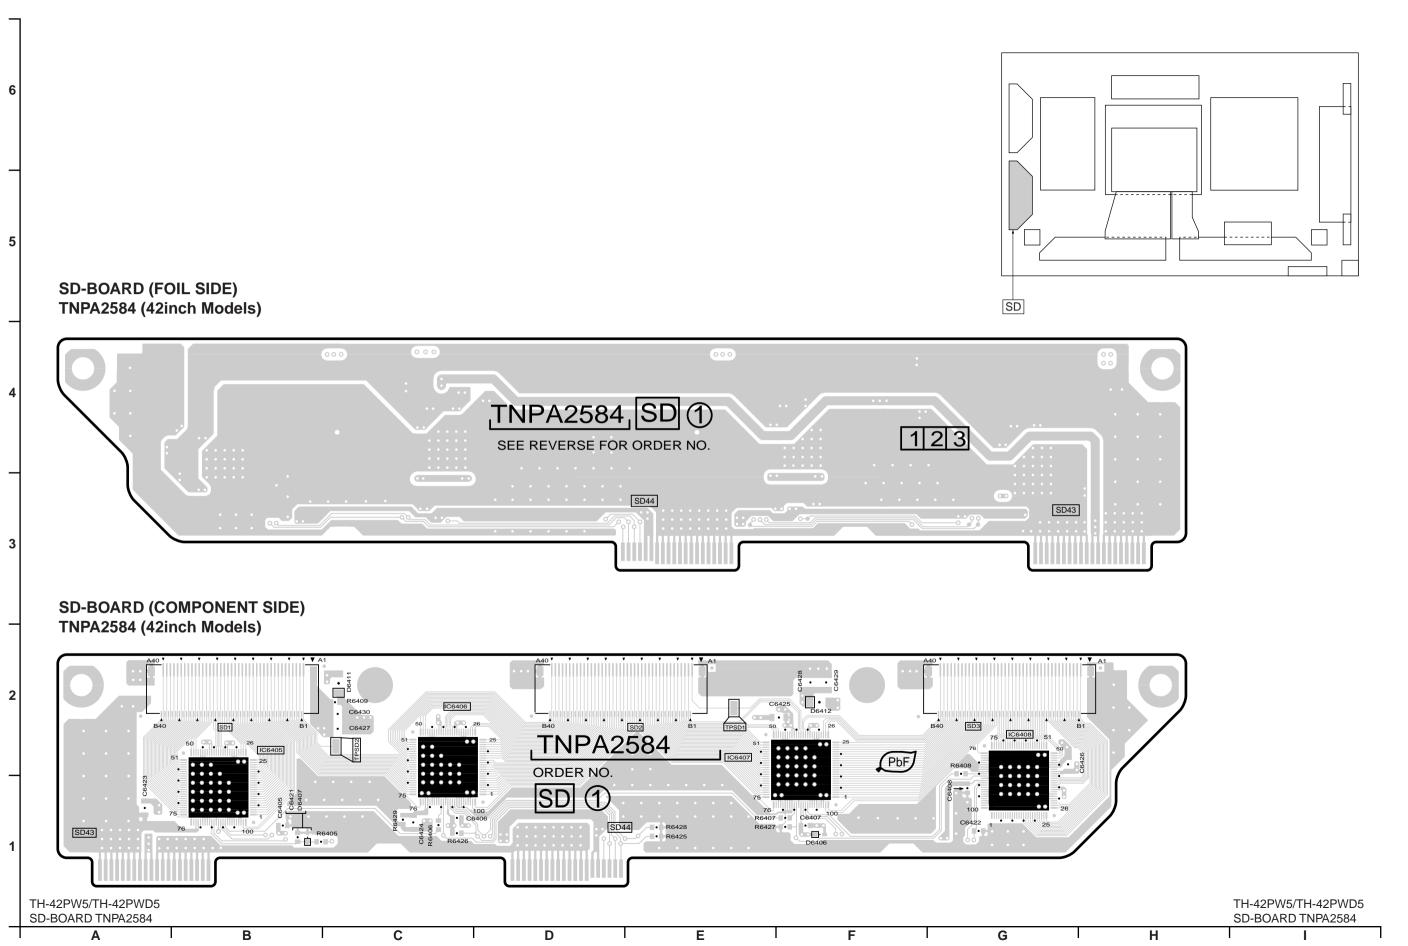


SS-BOARD (COMPONENT SIDE) TNPA2535 (42inch Models) TNPA2535AC (37inch Models)

5

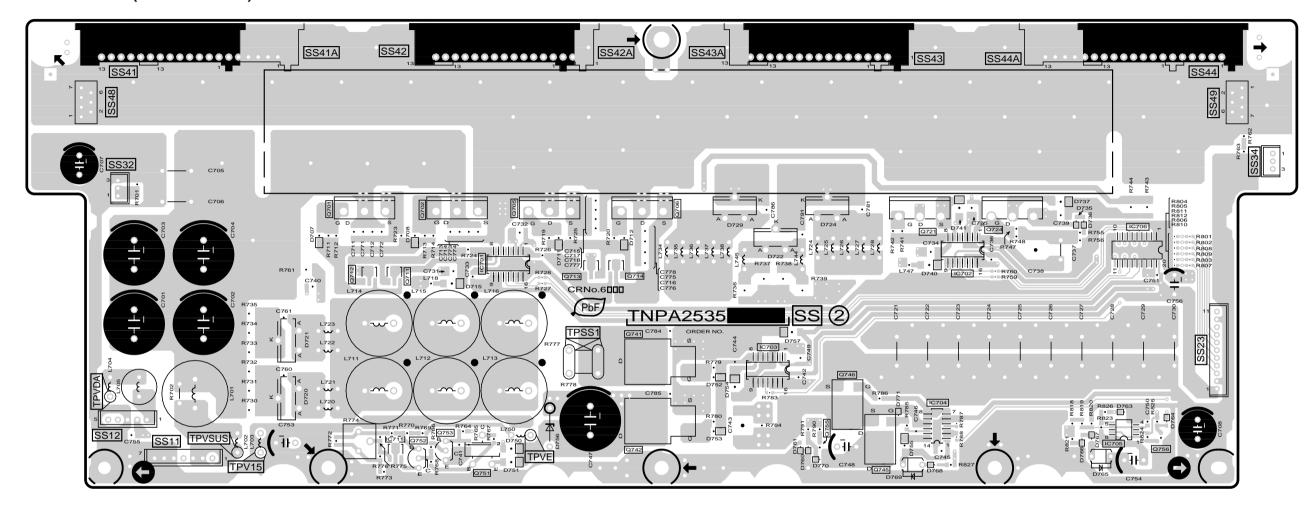


Ε


SS4-BOARD (COMPONENT SIDE) TNPA2538 (37inch Models)




SS2-BOARD (COMPONENT SIDE) TNPA2536 (42inch Models)

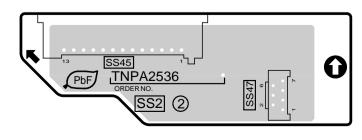

SS3-BOARD (COMPONENT SIDE) TNPA2537 (42inch Models)

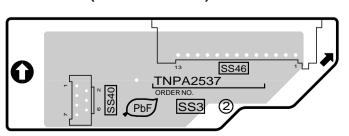

SS5-BOARD (COMPONENT SIDE) TNPA2539 (37inch Models)



TH-42PW5/TH-42PWD5 SS-BOARD TNPA2535 TH-37PW5/TH-37PWD5 SS-BOARD TNPA2535AC

SS2-BOARD TNPA2536 SS3-BOARD TNPA2537 SS4-BOARD TNPA2538 SS6-BOARD TNPA2539


TH-42PW5/TH-42PWD5 SS-BOARD TNPA2535 TH-37PW5/TH-37PWD5 SS-BOARD TNPA2535AC

G

SS2-BOARD TNPA2536 SS3-BOARD TNPA2537 SS4-BOARD TNPA2538 SS6-BOARD TNPA2539


SS-BOARD (FOIL SIDE) TNPA2535 (42inch Models) TNPA2535AC (37inch Models)

6

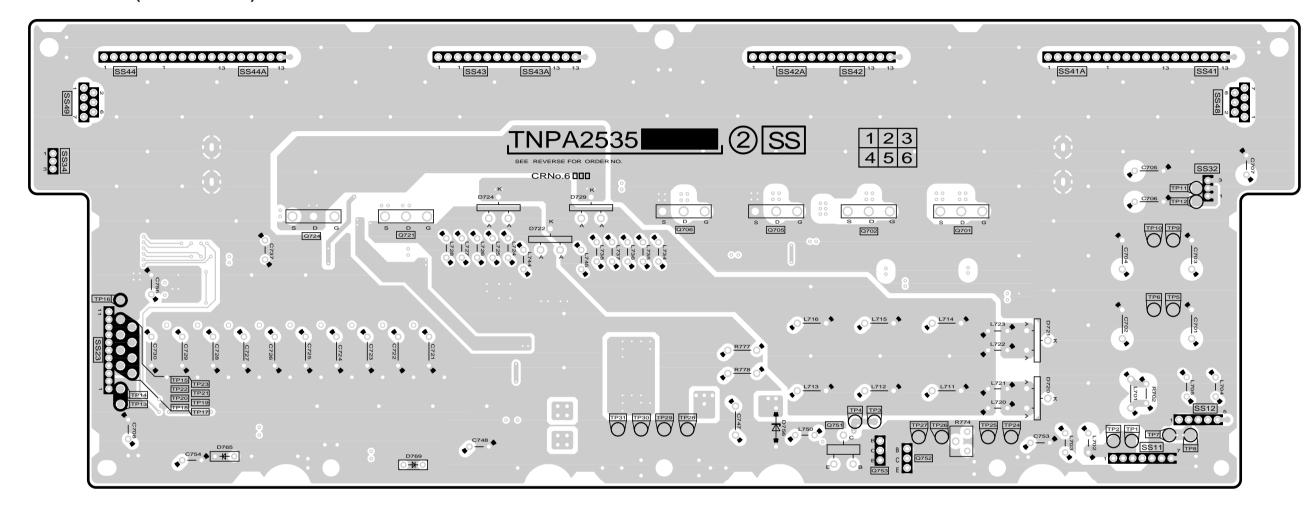


Ε


SS5-BOARD (COMPONENT SIDE) TNPA2539 (37inch Models)



SS3-BOARD (COMPONENT SIDE) TNPA2537 (42inch Models)

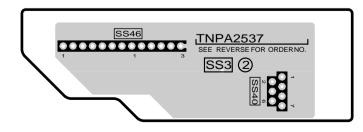


SS2-BOARD (COMPONENT SIDE) TNPA2536 (42inch Models)

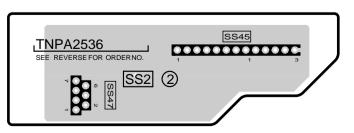

F

SS4-BOARD (COMPONENT SIDE) TNPA2538 (37inch Models)

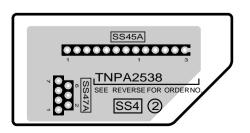

TH-42PW5/TH-42PWD5 SS-BOARD TNPA2535 TH-37PW5/TH-37PWD5 SS-BOARD TNPA2535AC


SS2-BOARD TNPA2536 SS3-BOARD TNPA2537 SS4-BOARD TNPA2538 SS6-BOARD TNPA2539

C

TH-42PW5/TH-42PWD5 SS-BOARD TNPA2535 TH-37PW5/TH-37PWD5 SS-BOARD TNPA2535AC

G


SS2-BOARD TNPA2536 SS3-BOARD TNPA2537 SS4-BOARD TNPA2538 SS6-BOARD TNPA2539

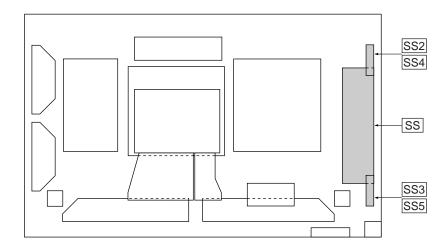


SS-BOARD (FOIL SIDE)									
TRANSISTOR		TP		TP16	A-4				
Q6701 Q6702 Q6705 Q6706 Q6721 Q6724 Q6751 Q6752 Q6753	G-4 F-4 F-4 E-4 C-4 C-4 F-3 G-3 F-3	TP1 TP2 TP3 TP4 TP5 TP6 TP7 TP8 TP9 TP10 TP11 TP12 TP13 TP14 TP15	H-3 H-3 F-3 F-3 H-4 H-4 H-3 H-4 H-4 H-5 H-4 A-3 A-3 B-3	TP17 TP18 TP19 TP20 TP21 TP22 TP23 TP24 TP25 TP26 TP27 TP28 TP29 TP30 TP31	B-3 B-3 B-3 B-3 B-3 G-3 G-3 G-3 G-3 E-3 E-3				

#### **Parts Location**

SS-BOARD (COMPONENT SIDE)										
IC	IC		TRANSISTOR		TP					
IC67	702 703 704 705 706	D-4 G-4 F-3 G-3 H-3 H-4 C-3	Q6701 Q6702 Q6705 Q6706 Q6711 Q6712 Q6713 Q6714 Q6721 Q6724 Q6745 Q6745 Q6745 Q6755	C-4 C-4 D-4 E-4 C-4 D-4 E-4 G-4 G-4 E-3 E-3 F-3 F-3 F-3 D-3 C-3 D-3 H-3	TPSS1 TPV15 TPVDA TPVE TPVSUS	D-4 B-3 A-3 D-3 B-3				

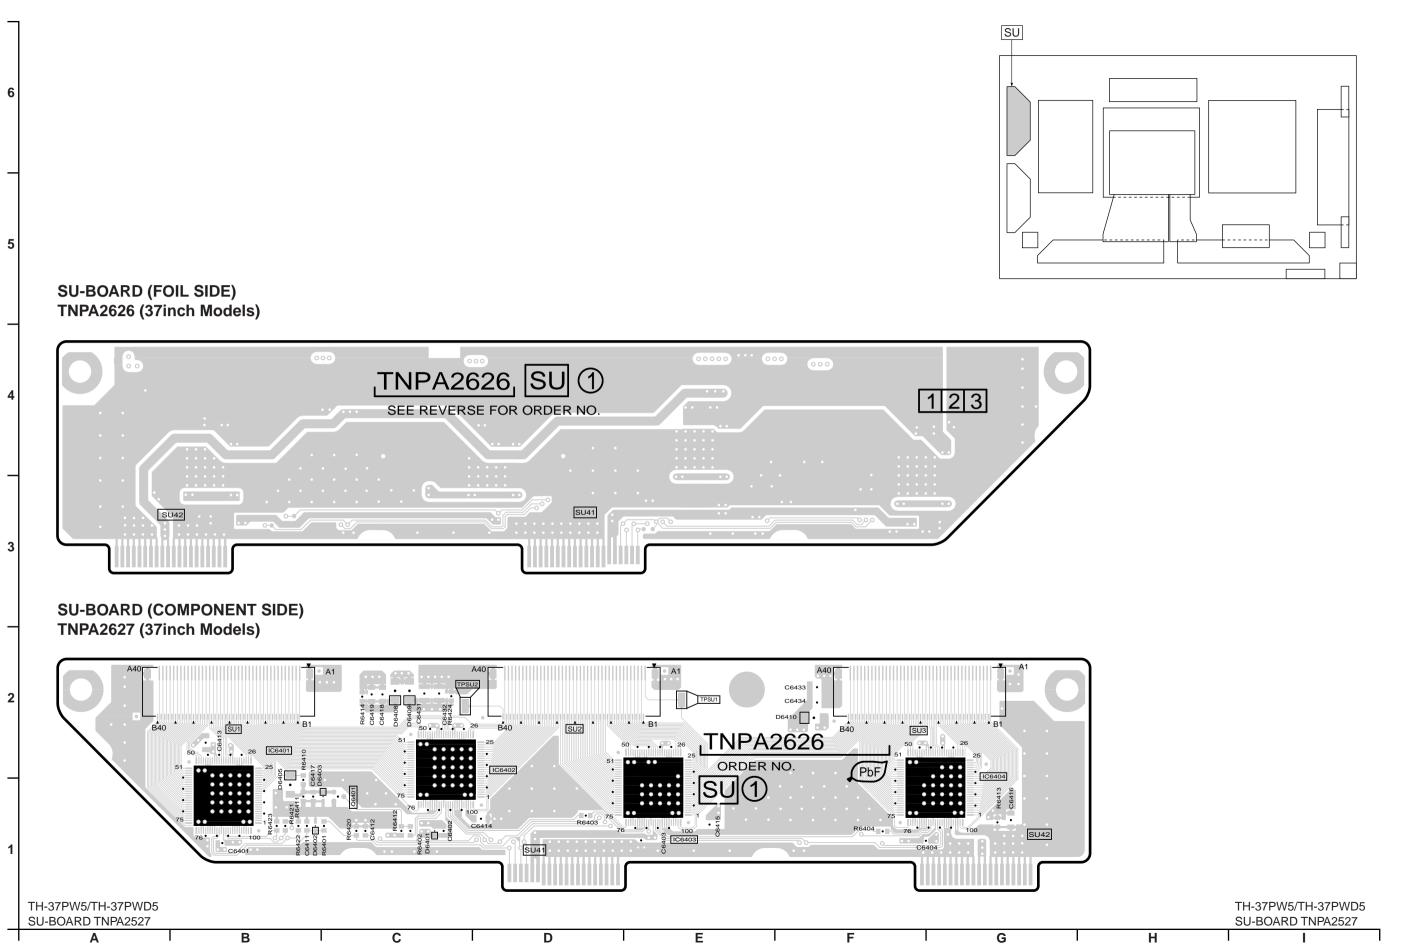

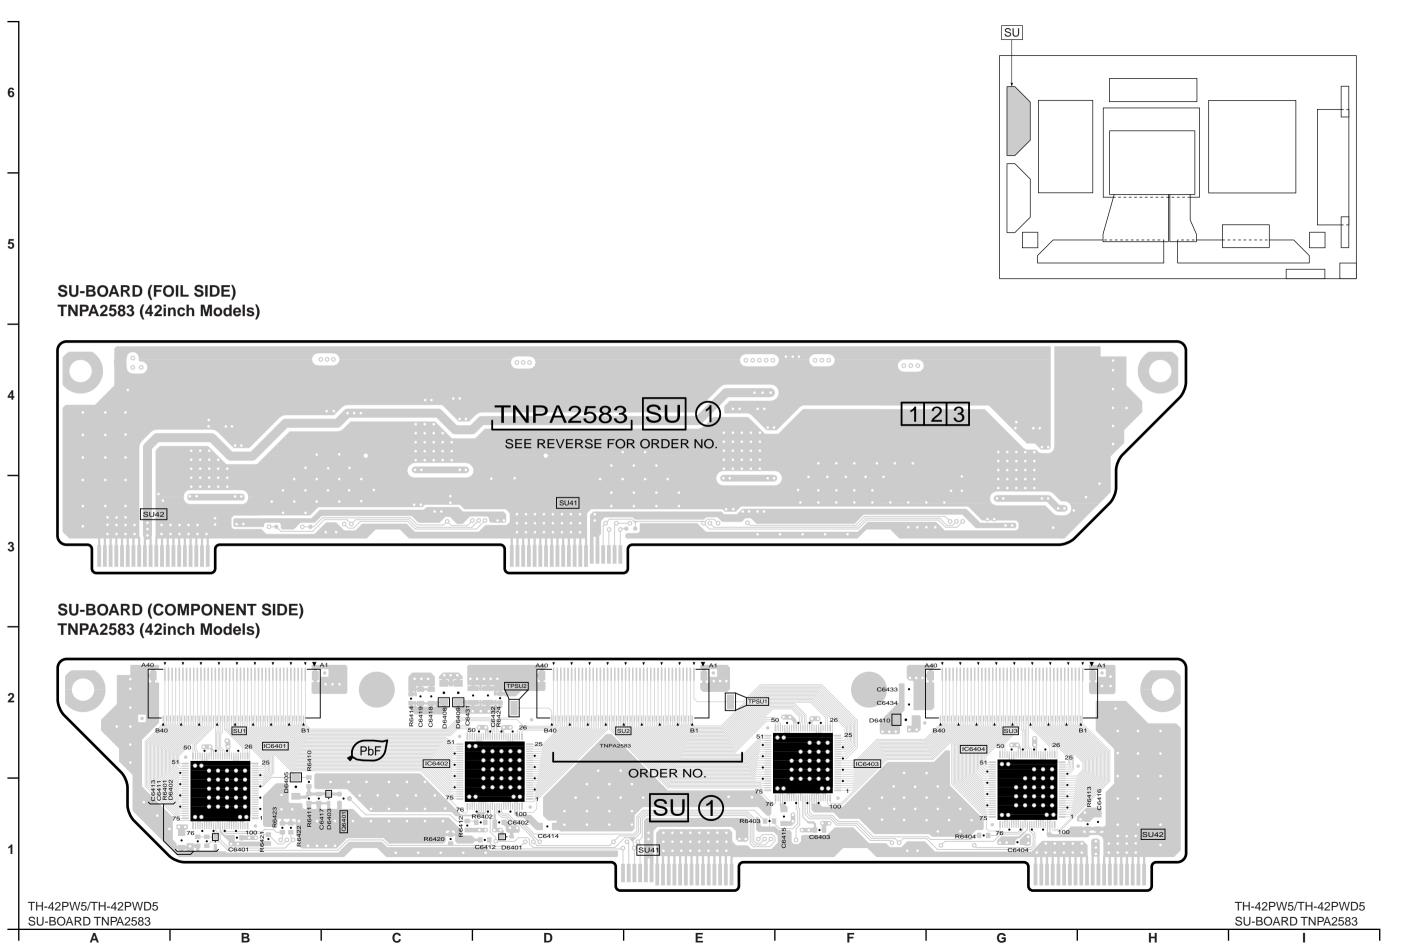

# **Z-BOARD (FOIL SIDE) TNPA2590**


6


5

4


3

2

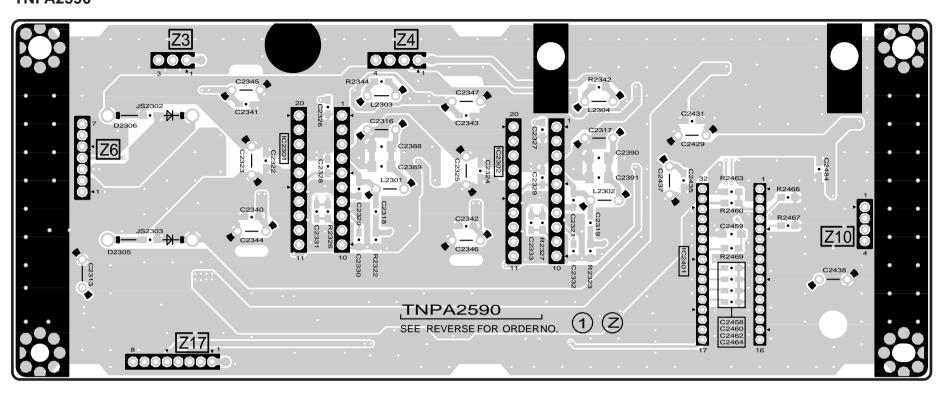

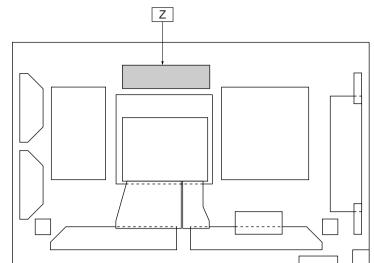

# **Z-BOARD (COMPONENT SIDE) TNPA2590**

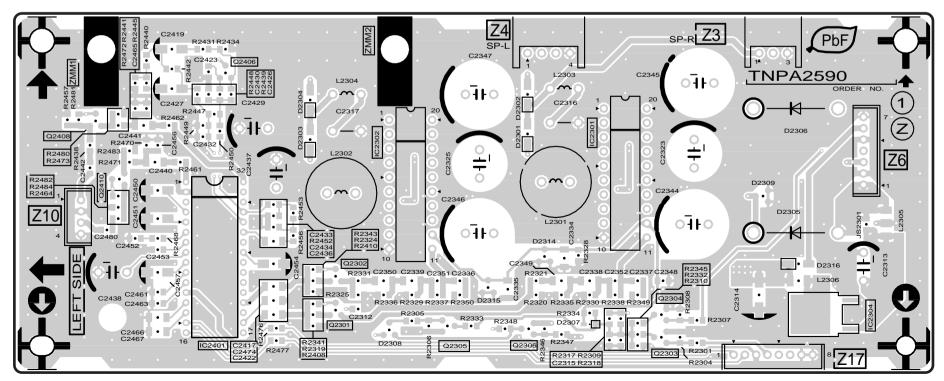

D

Ε


F


G


C


TH-42PW5/TH-42PWD5/TH-37PWD5 Z-BOARD TNPA2590


TH-42PW5/TH-42PWD5/TH-37PWD5 Z-BOARD TNPA2590

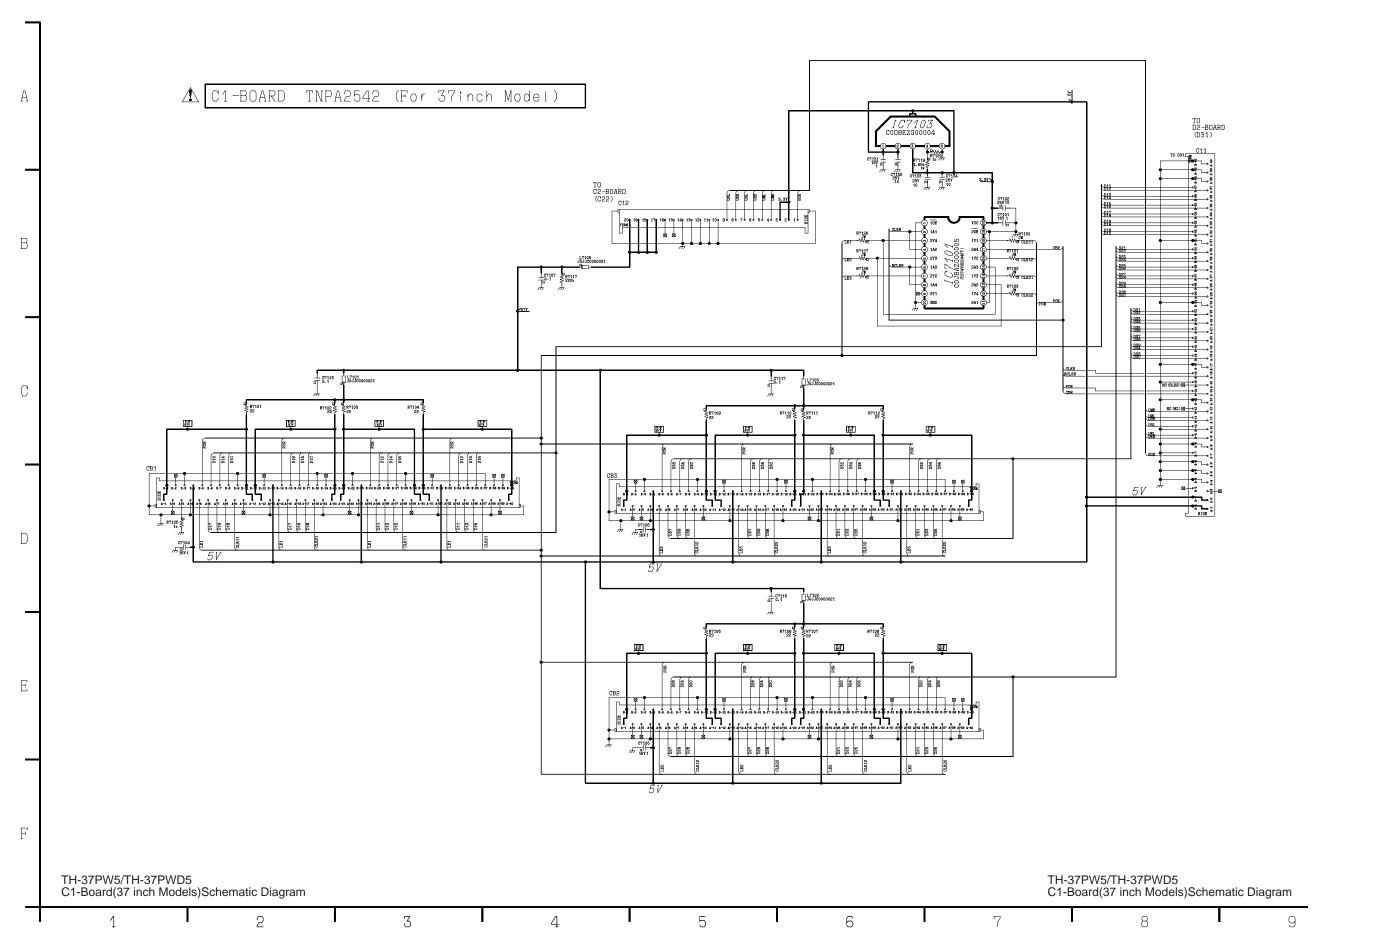


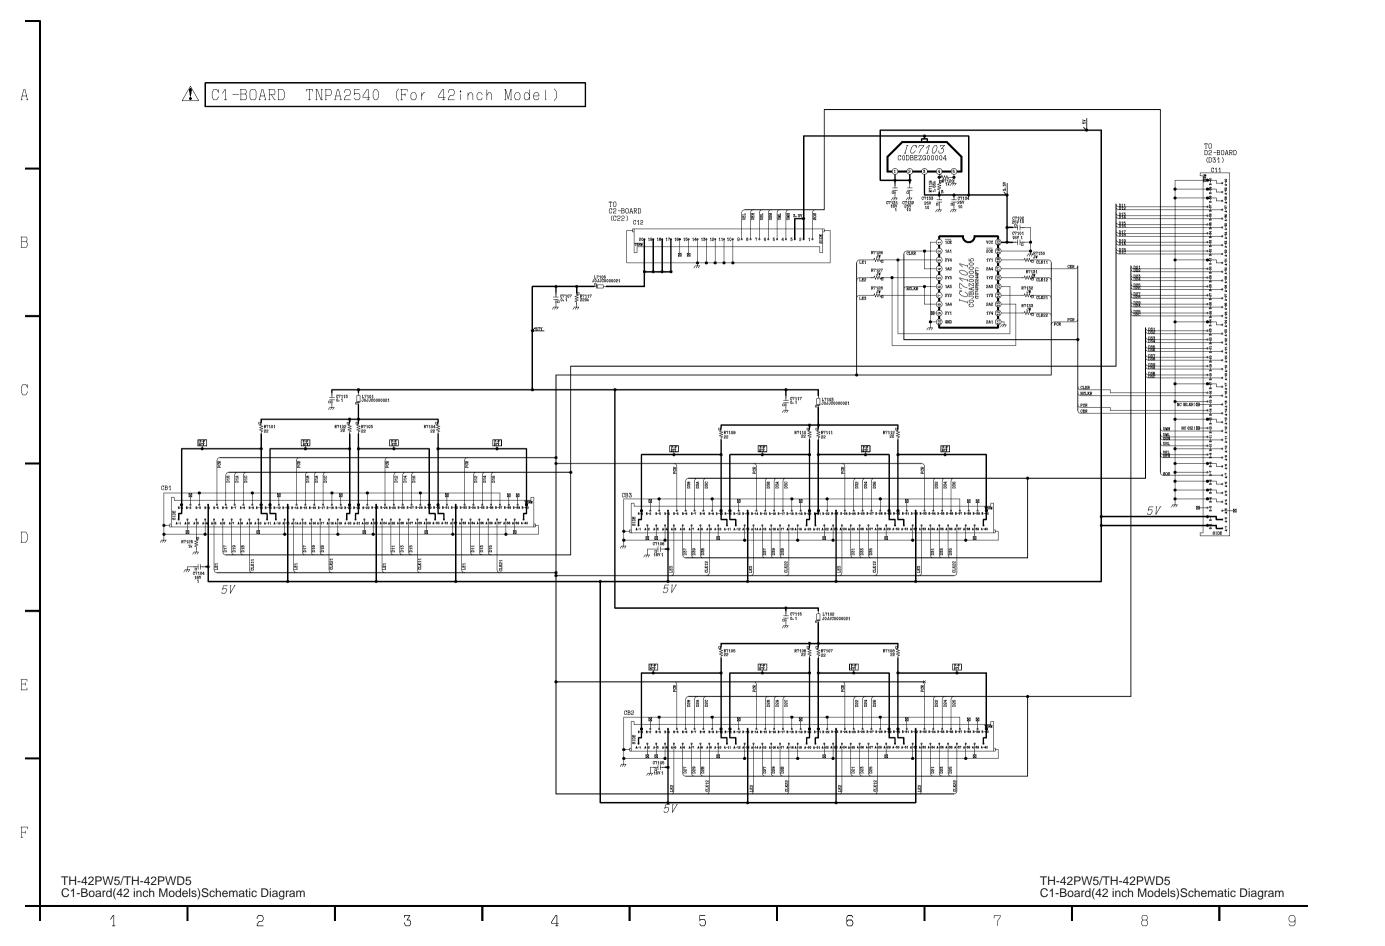


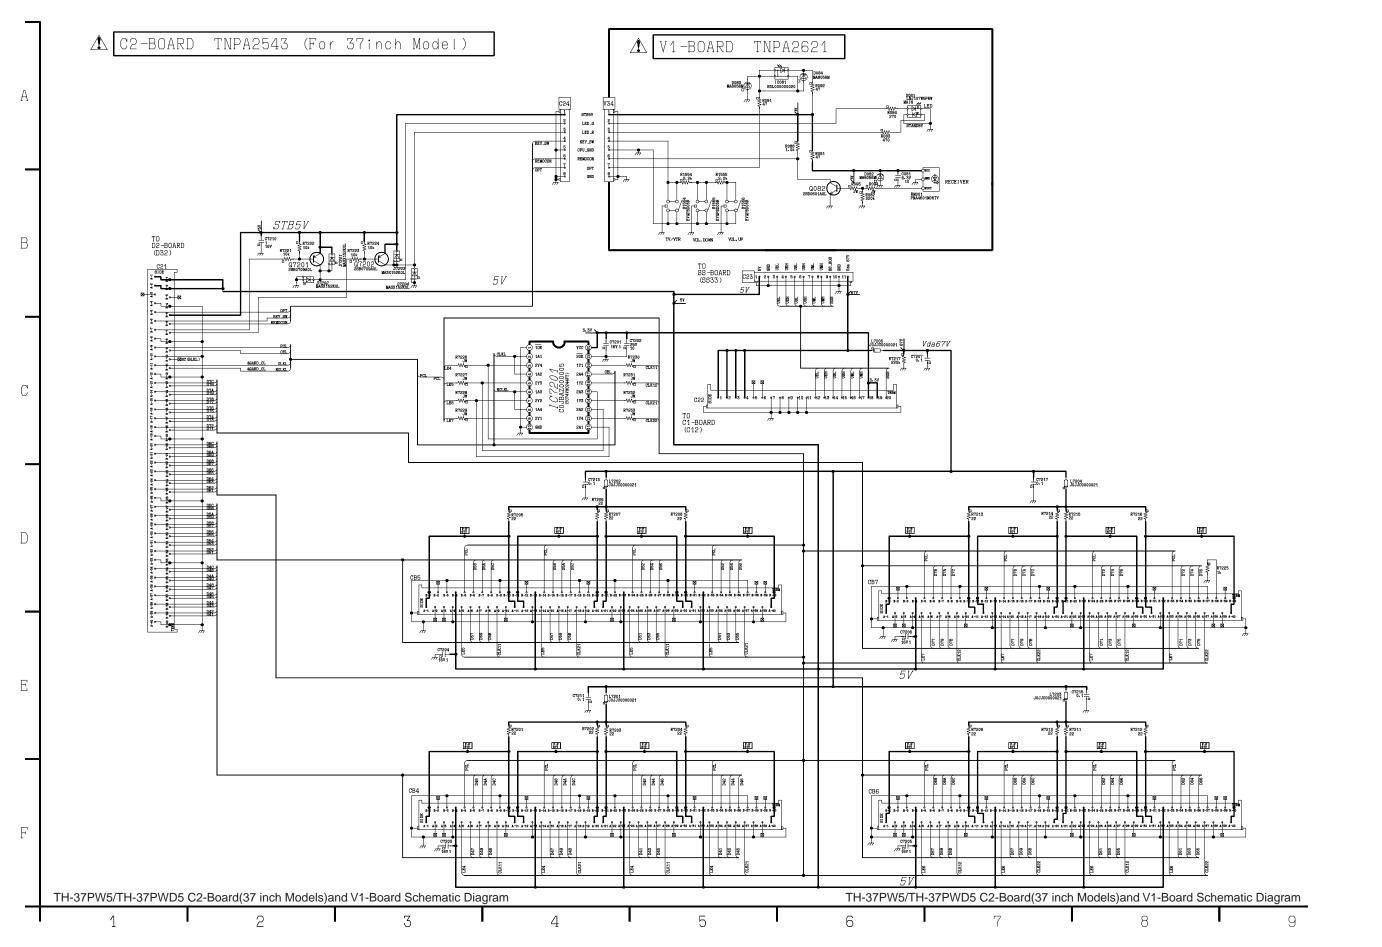


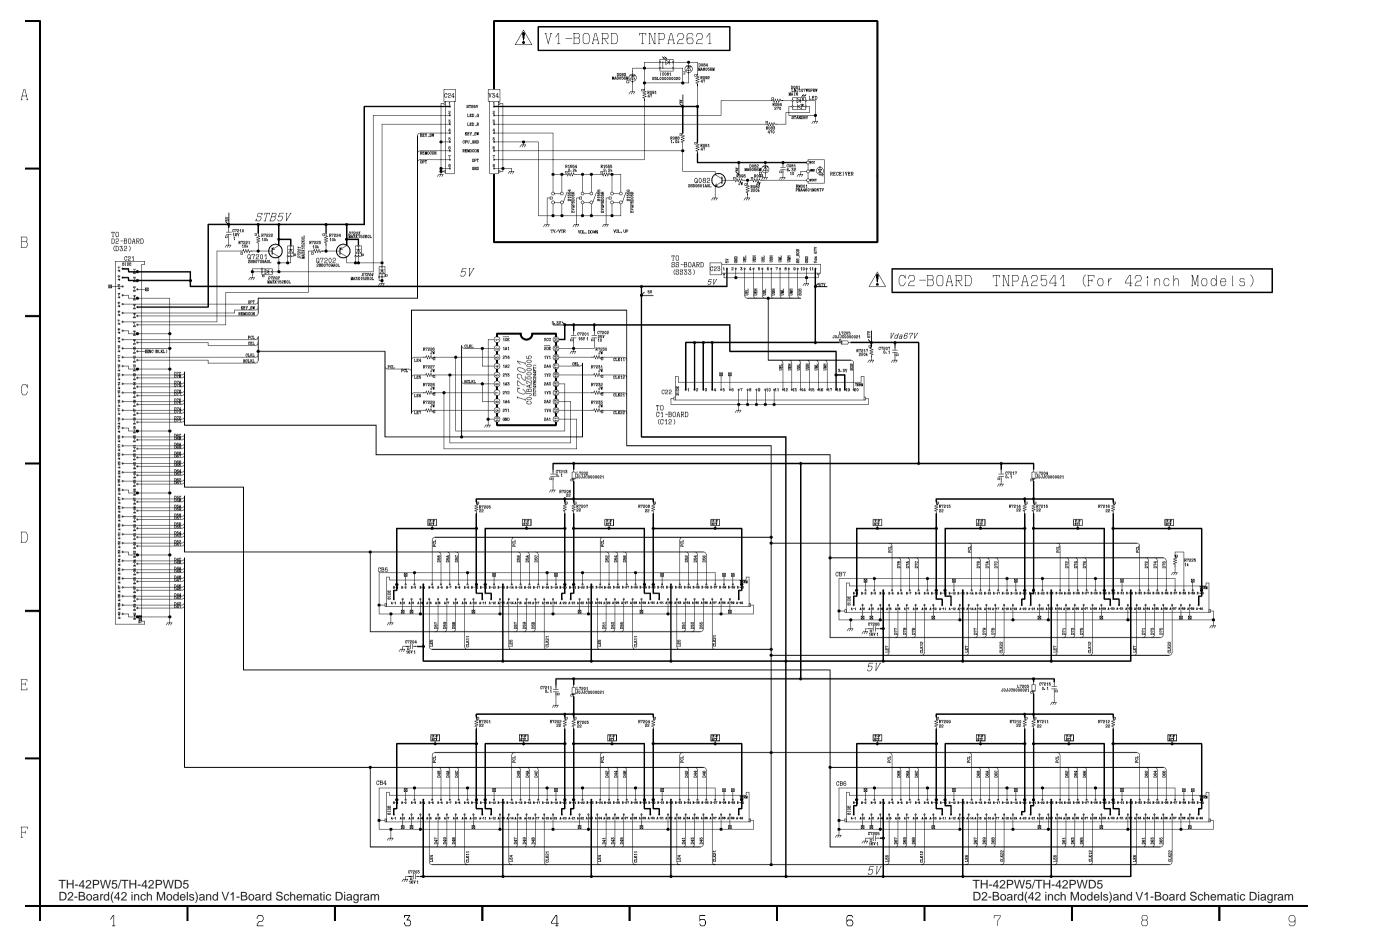


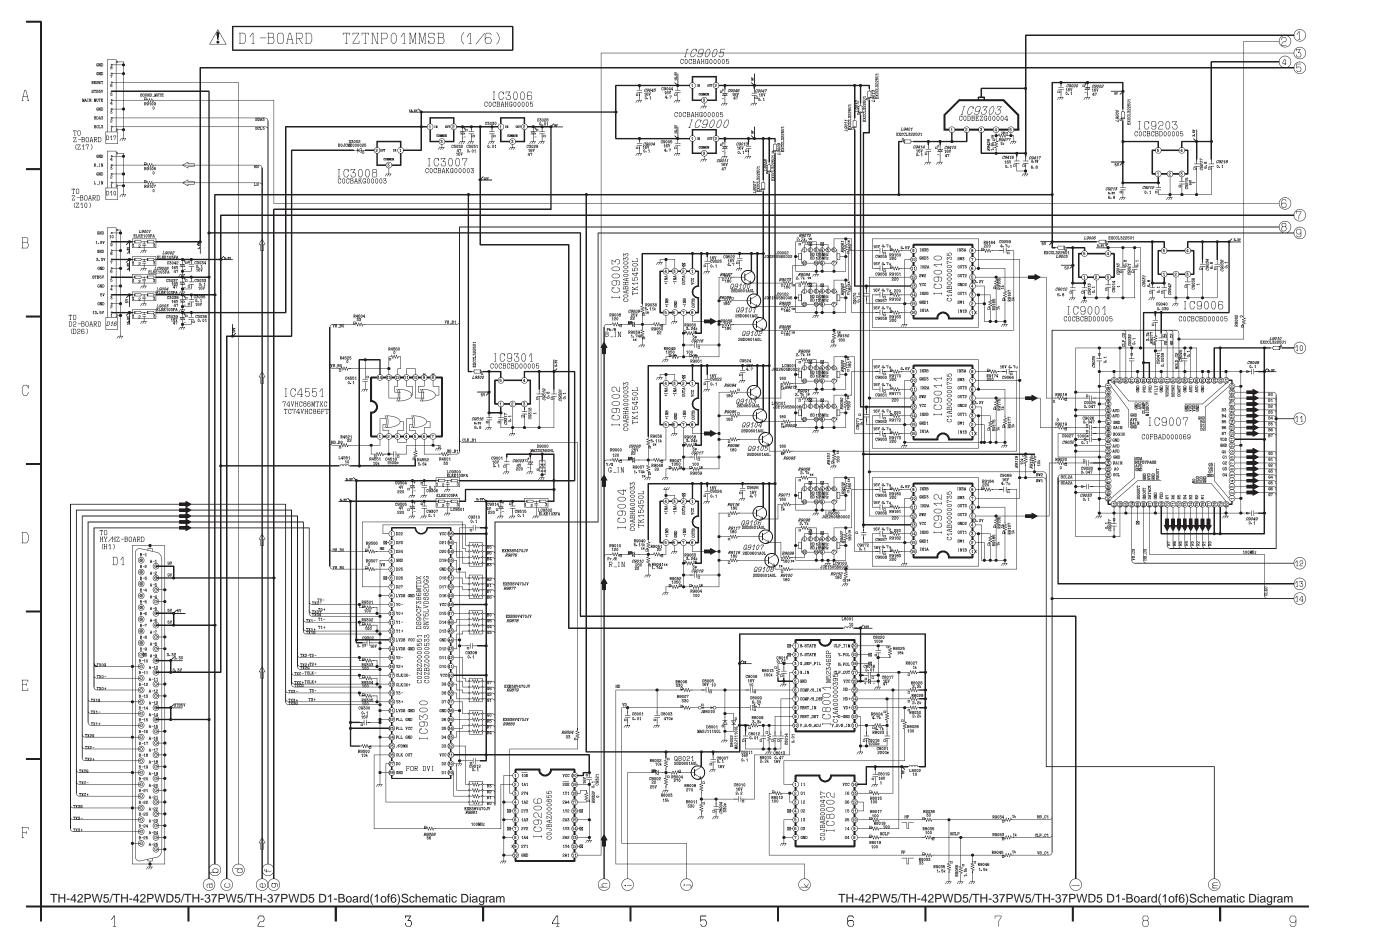


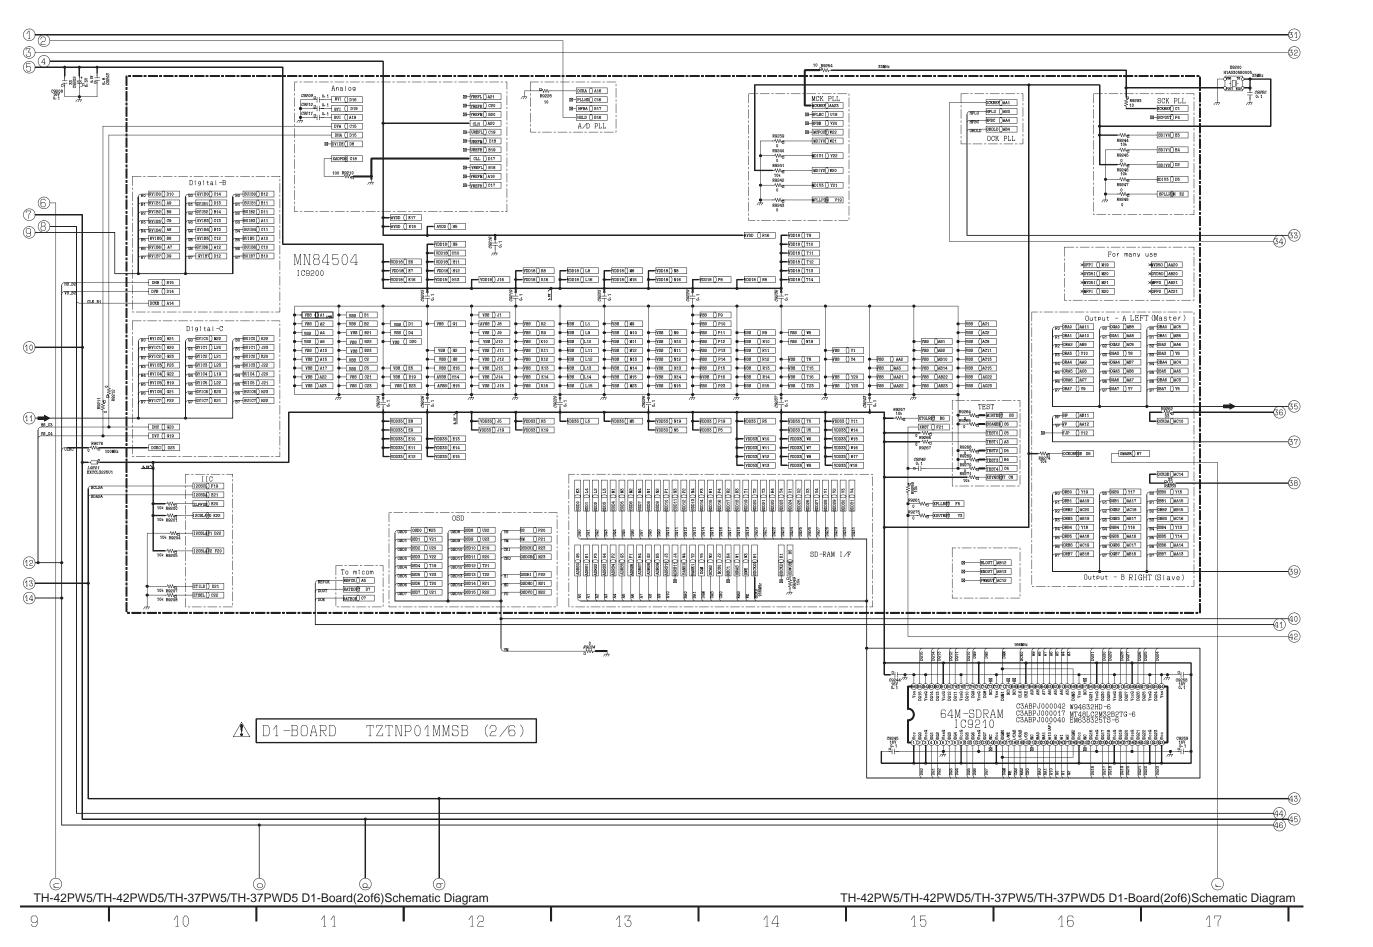


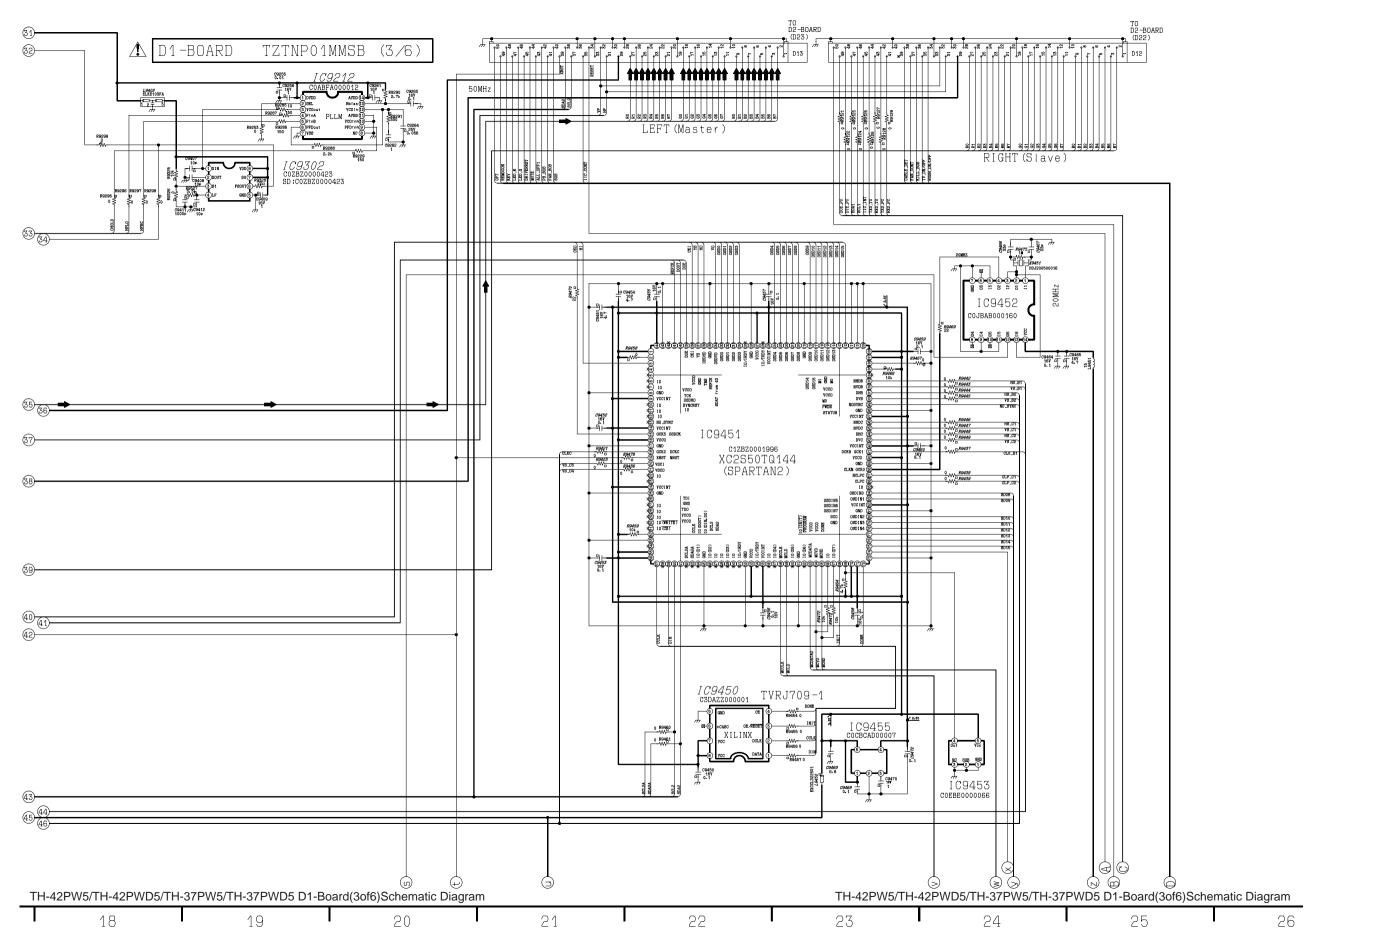


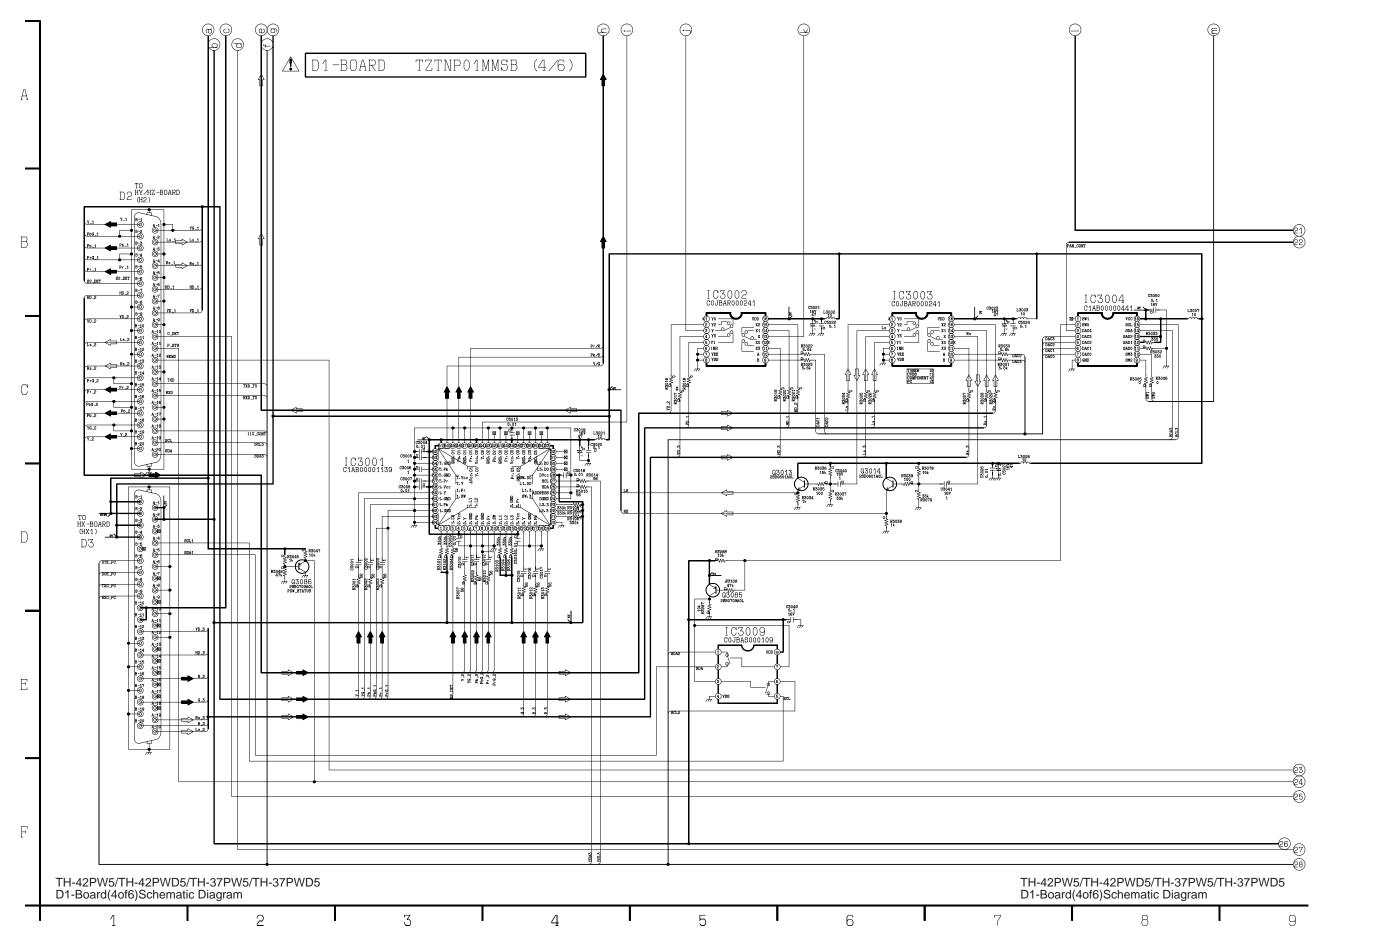


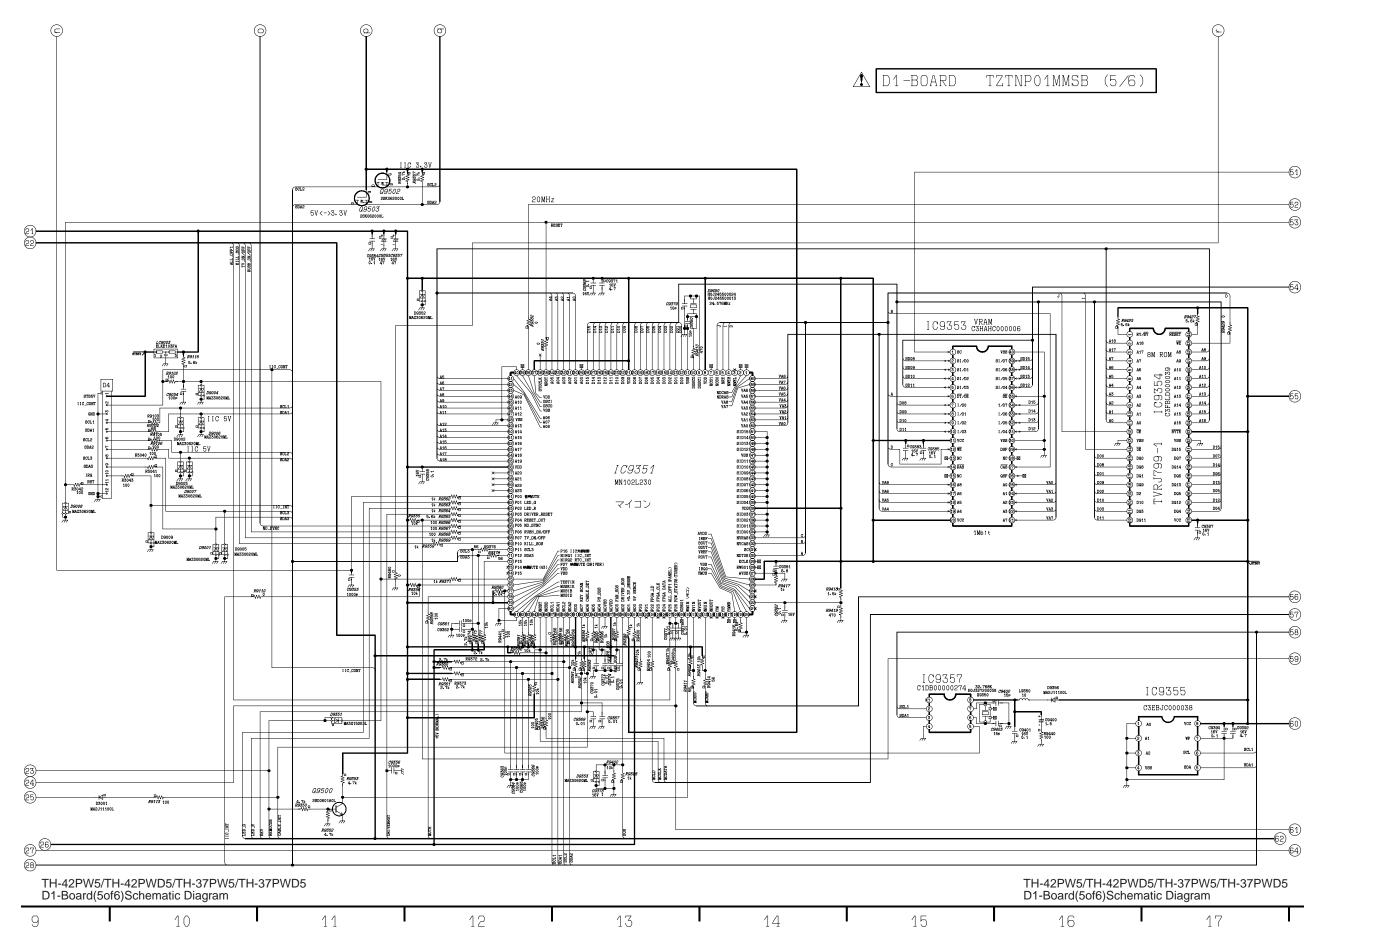


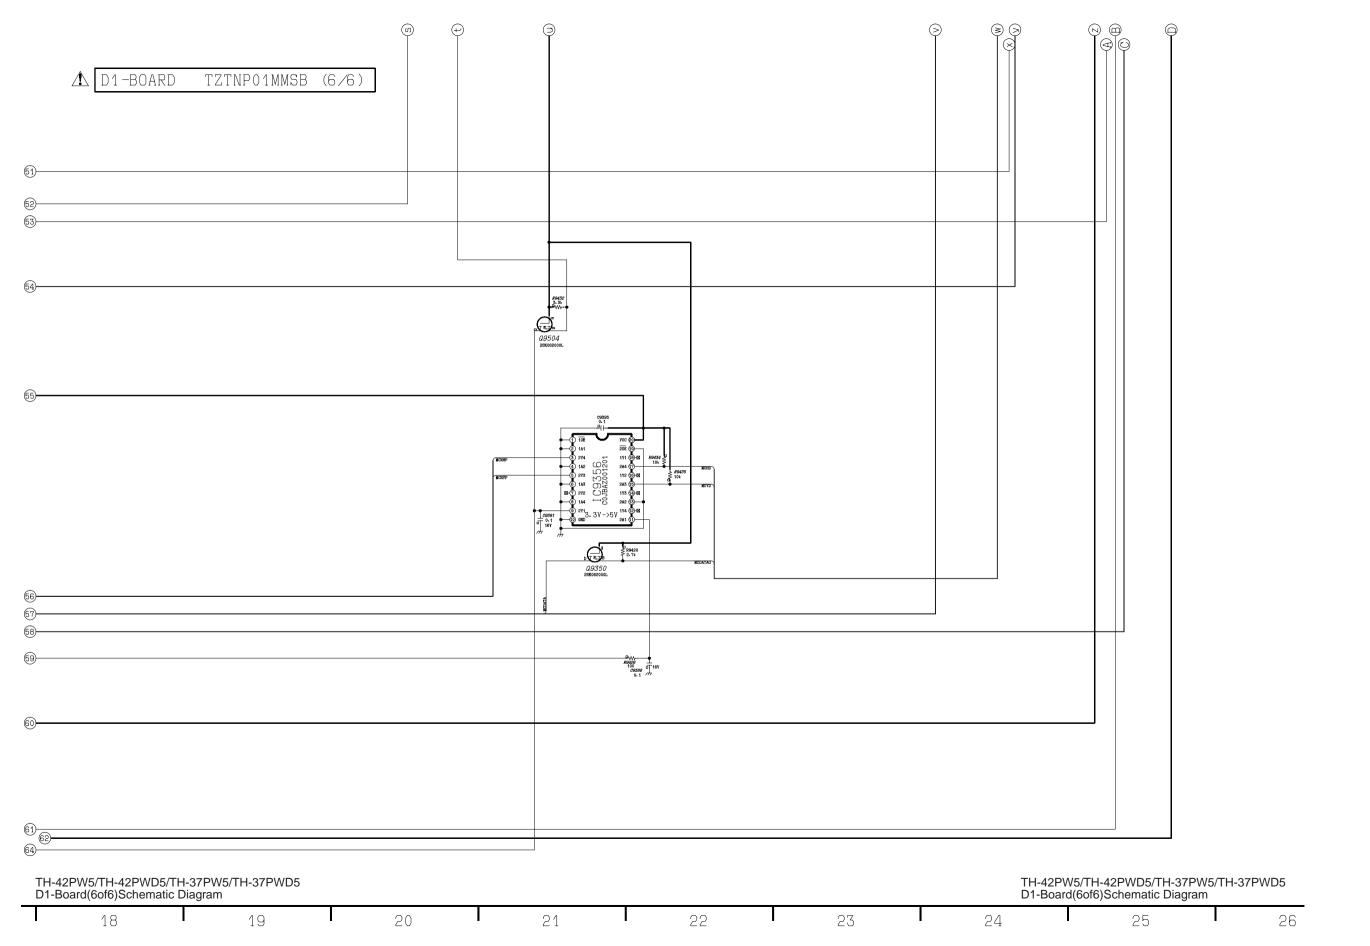


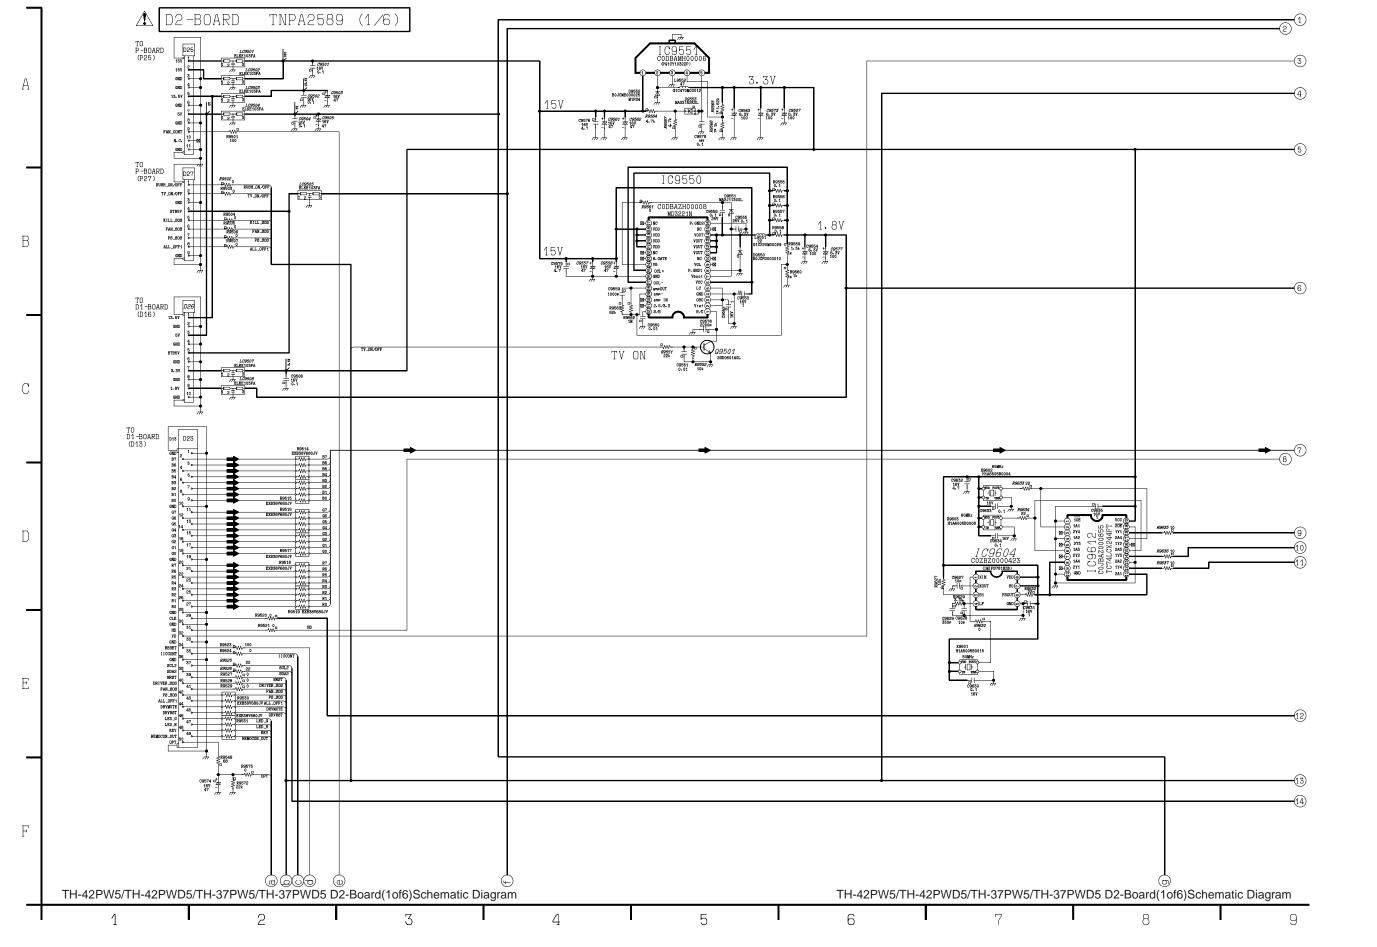


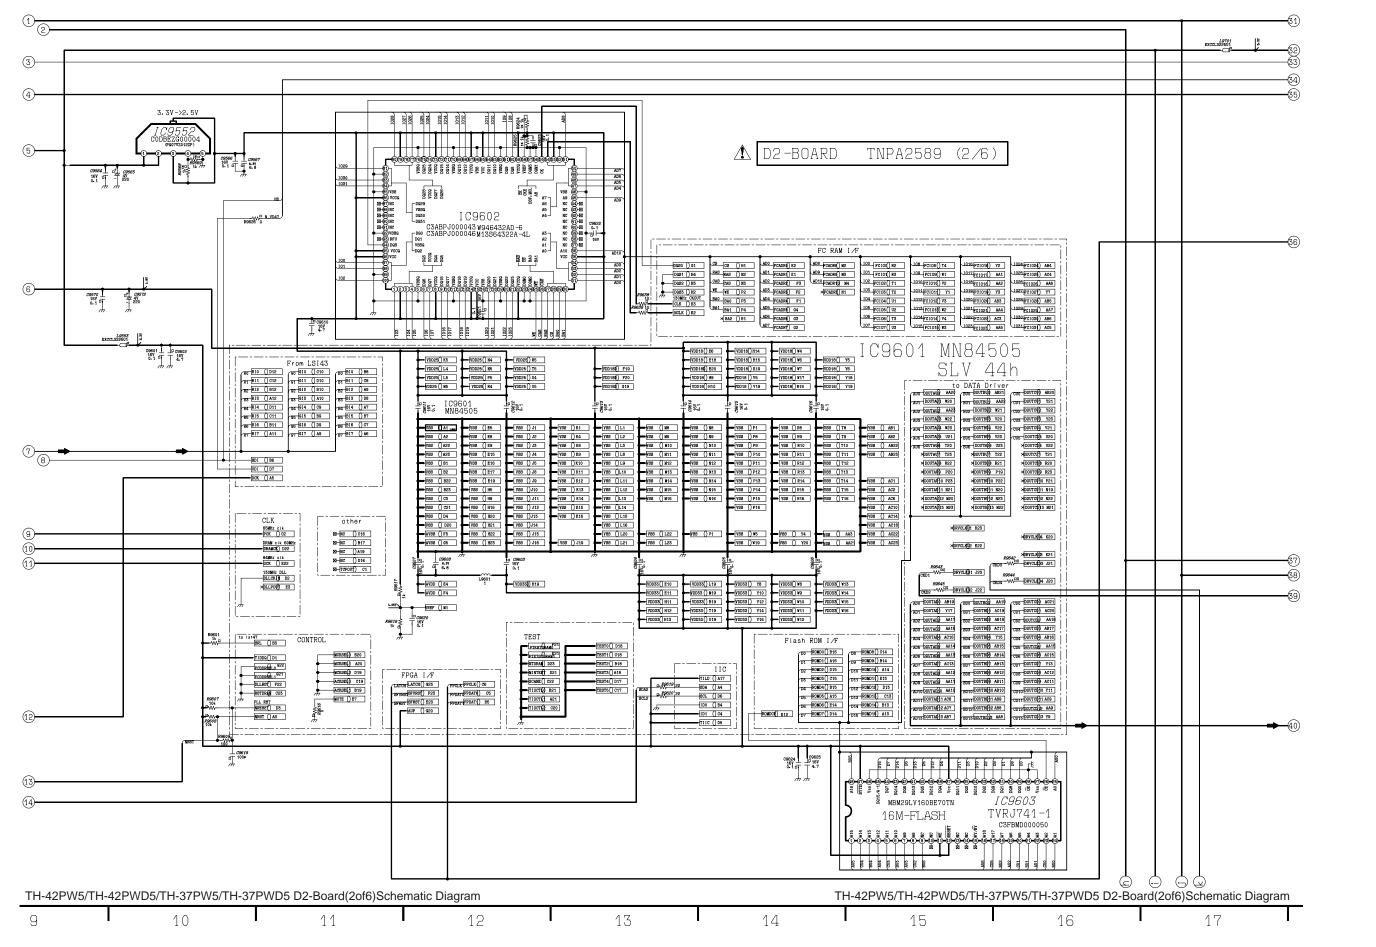


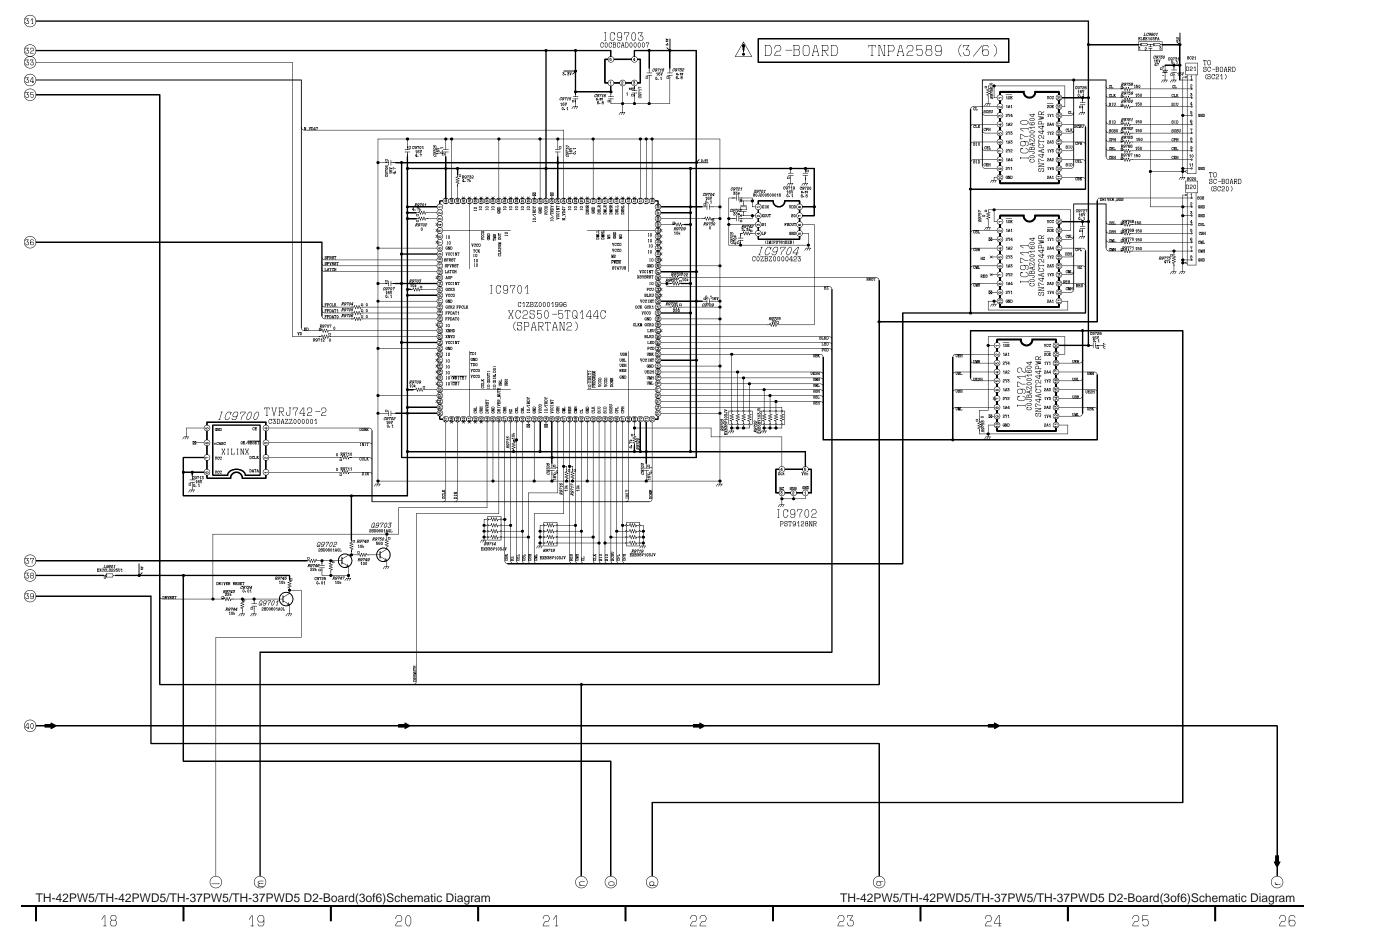


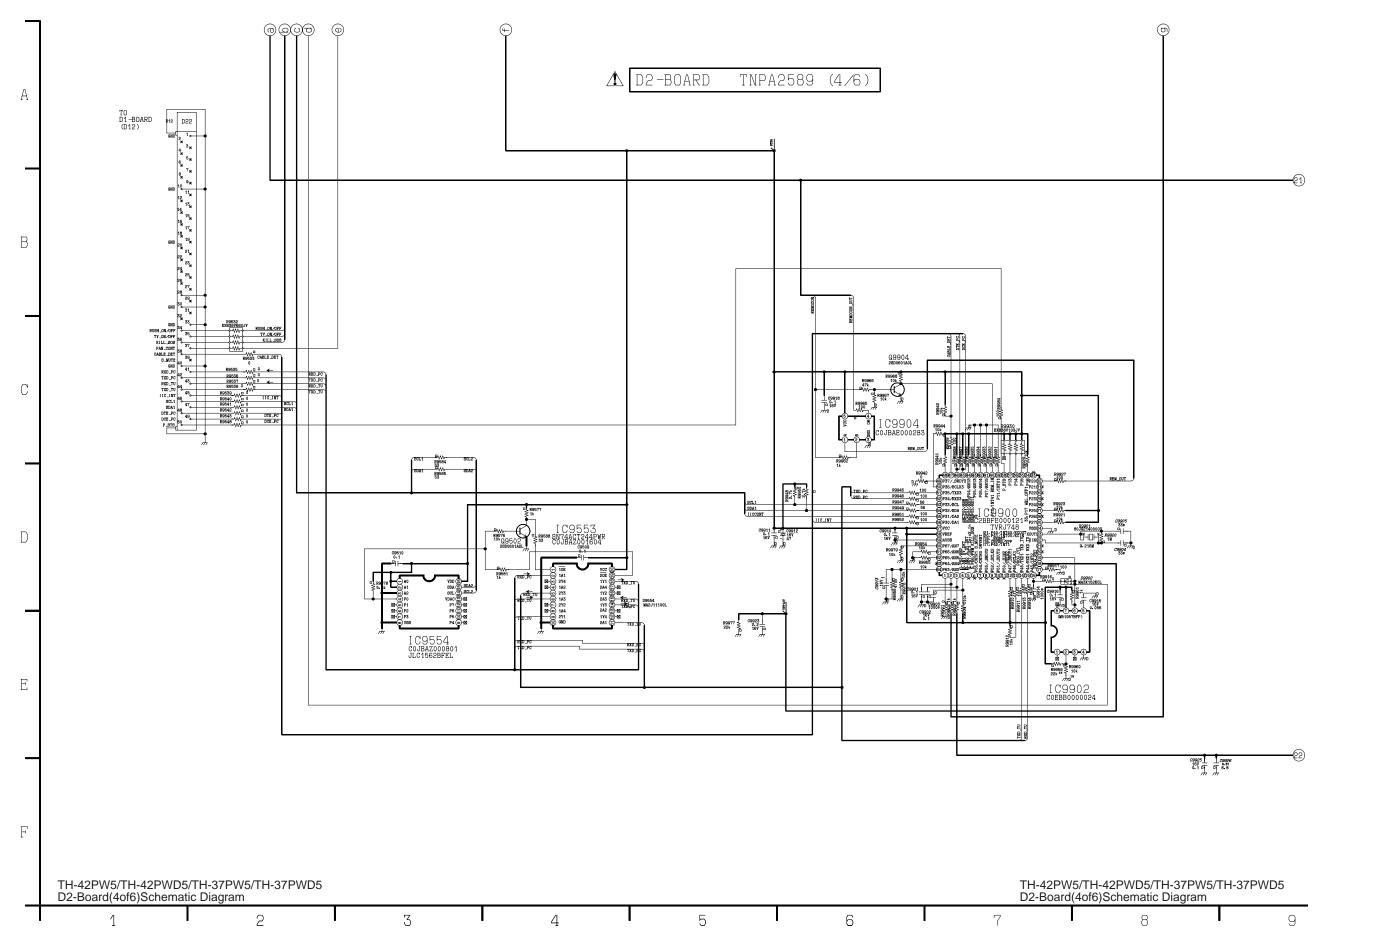


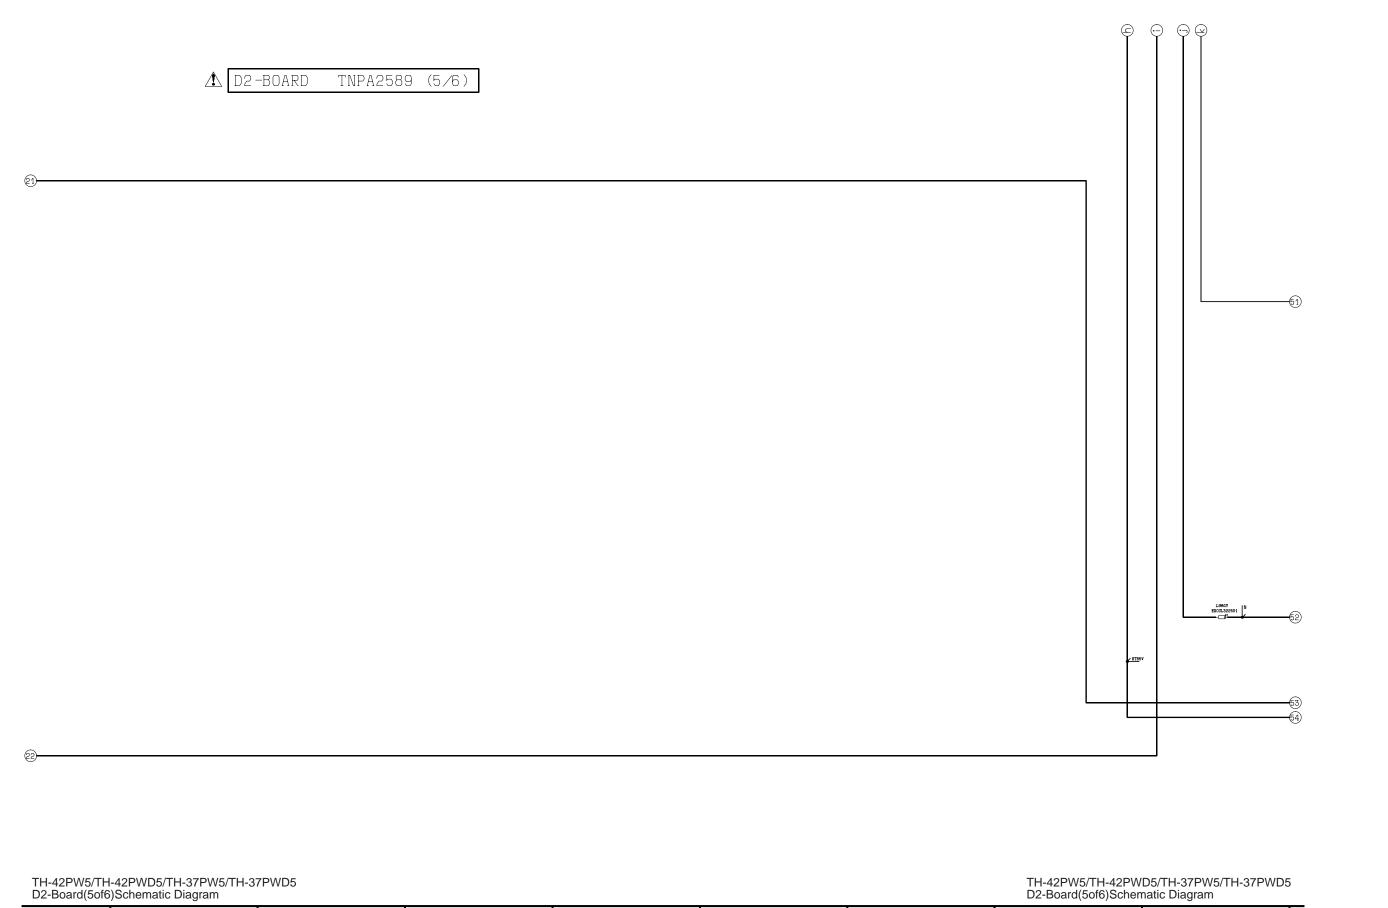


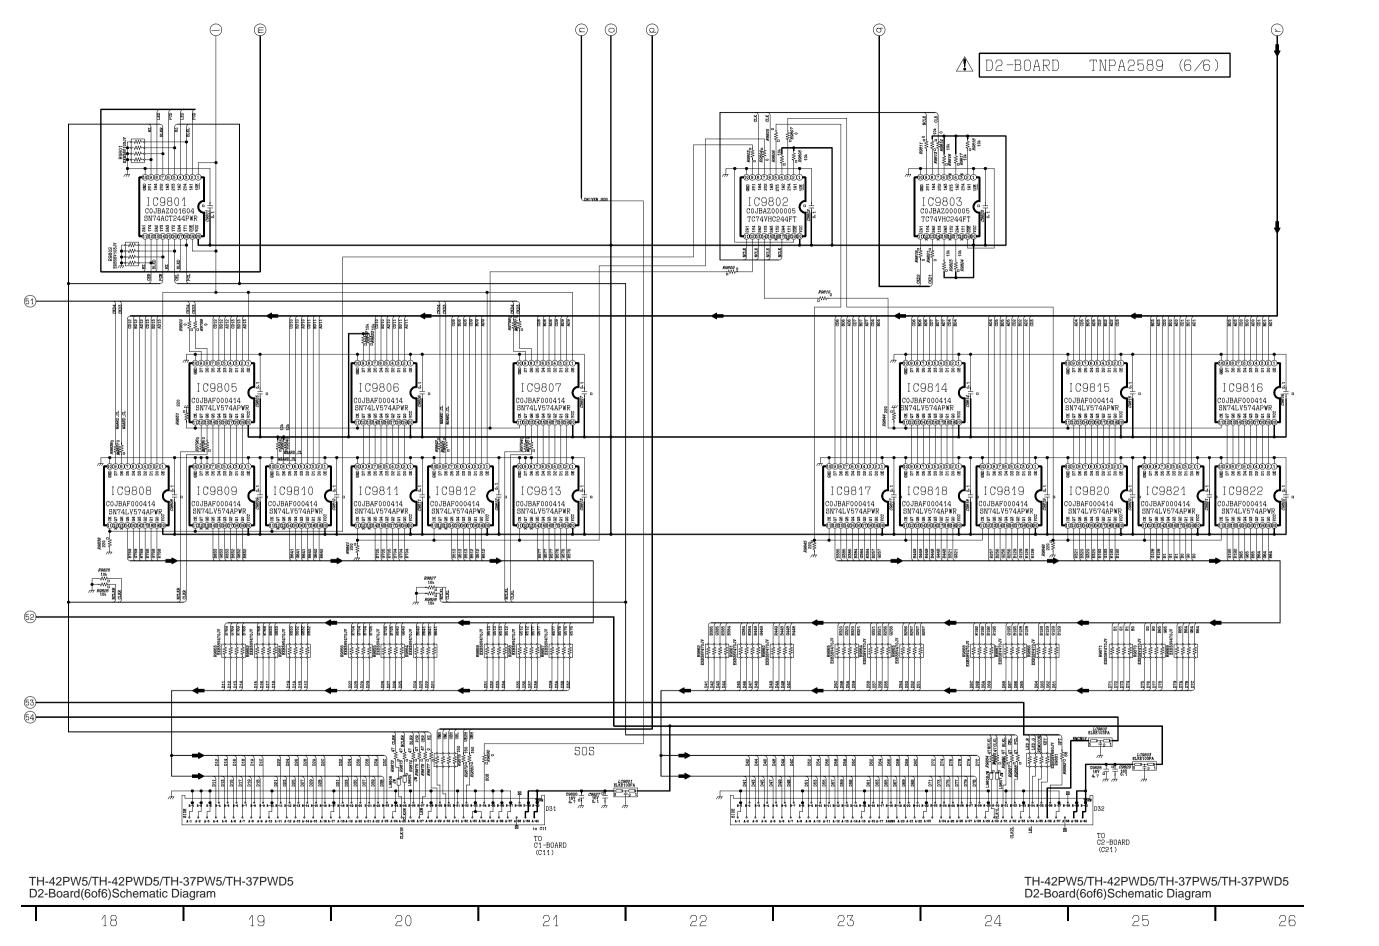


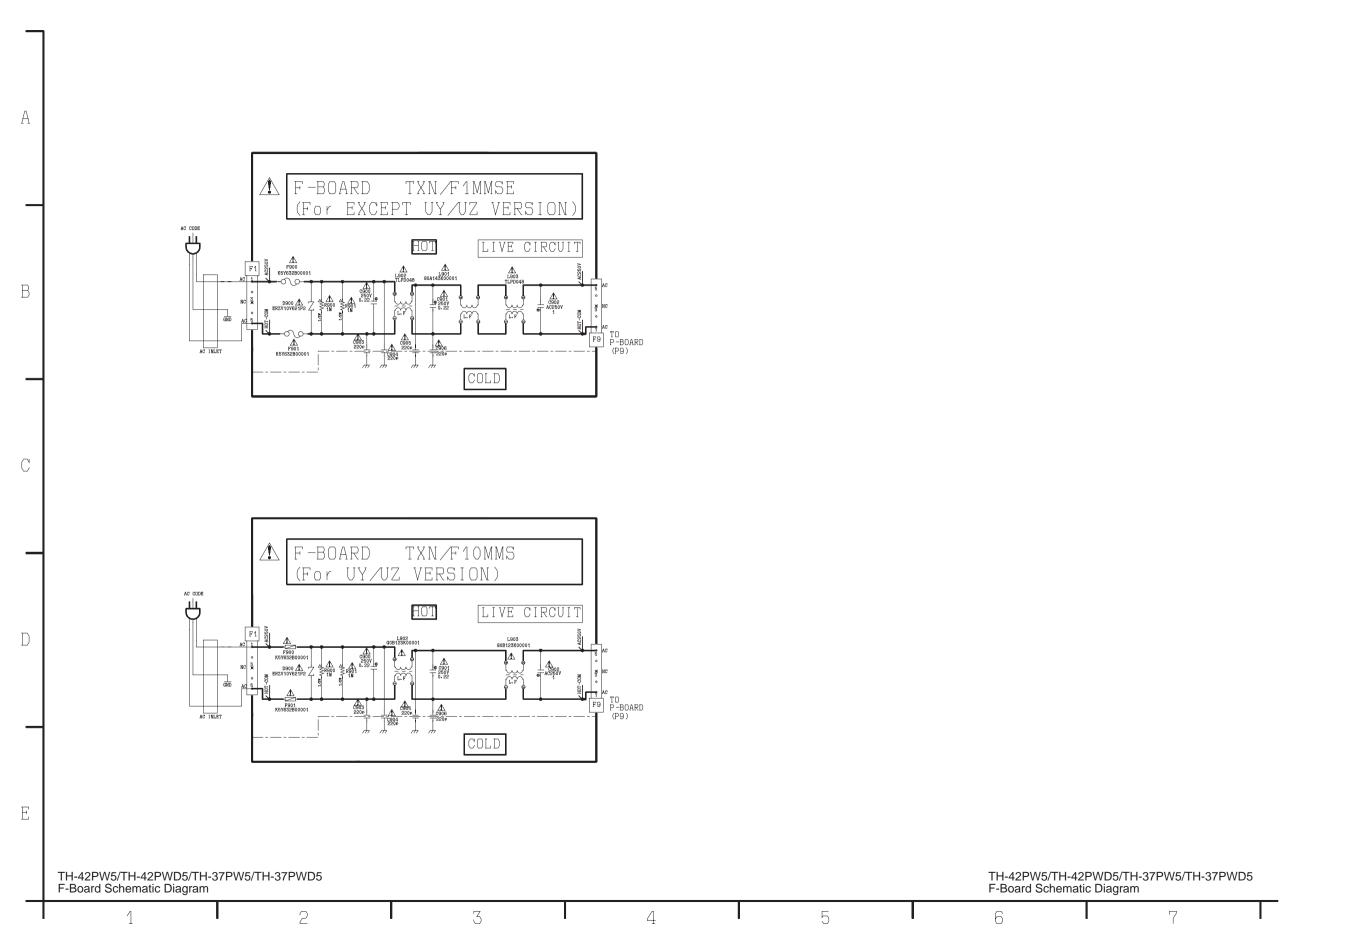


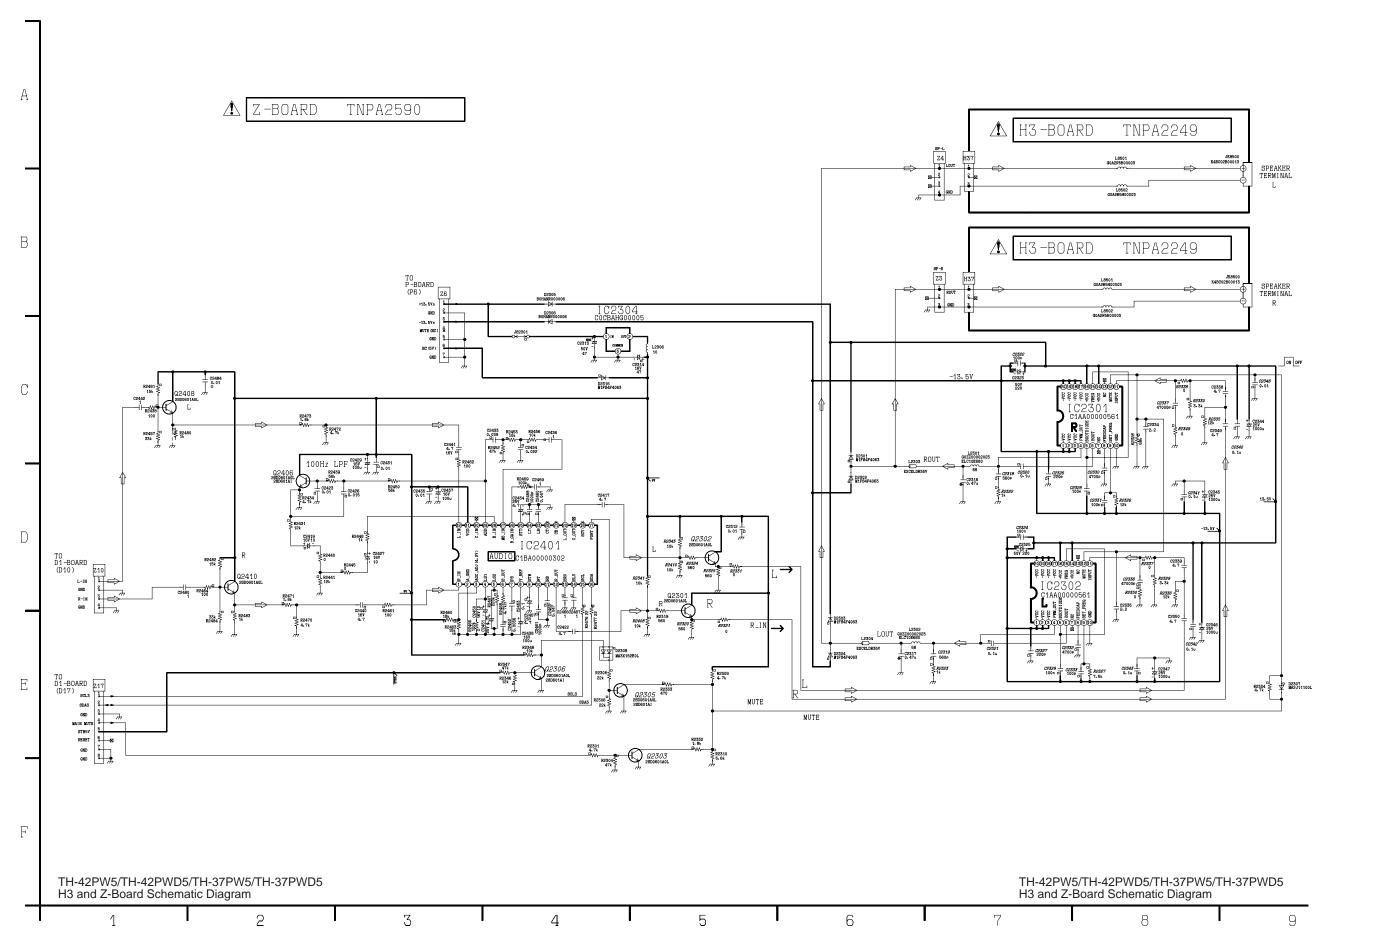


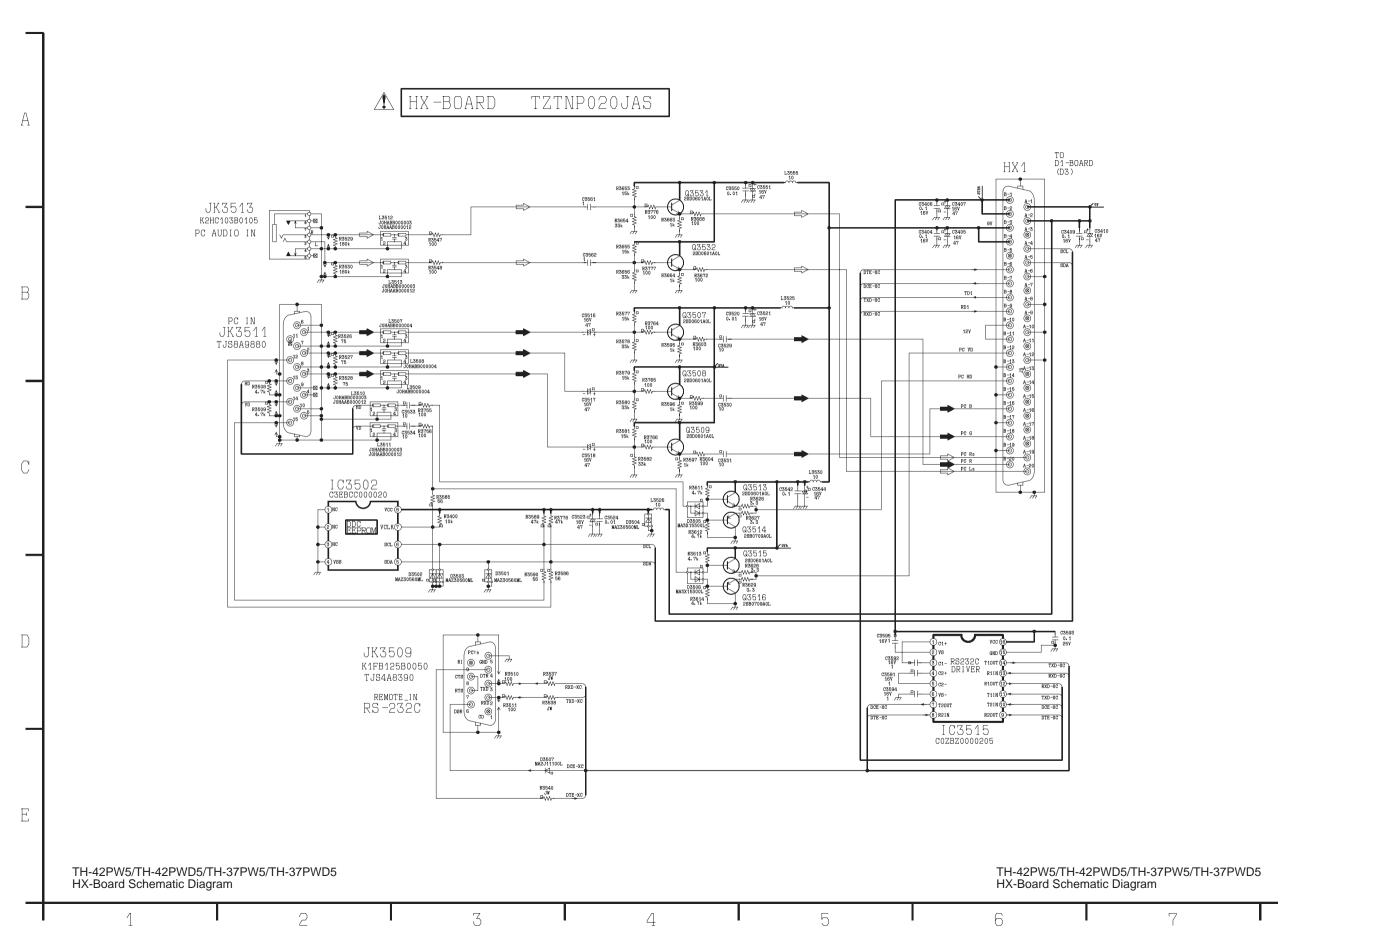

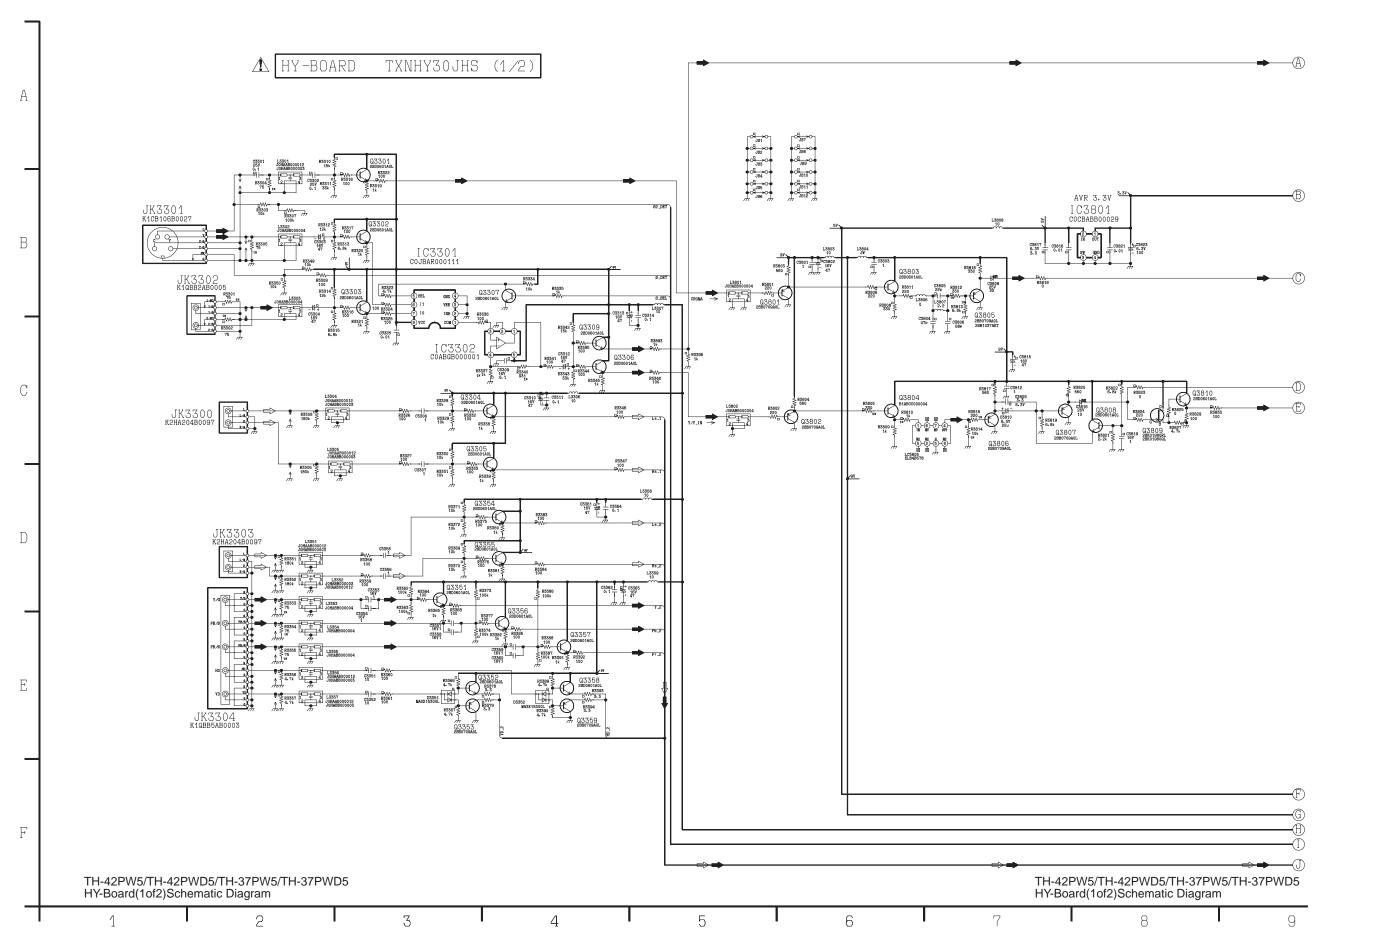

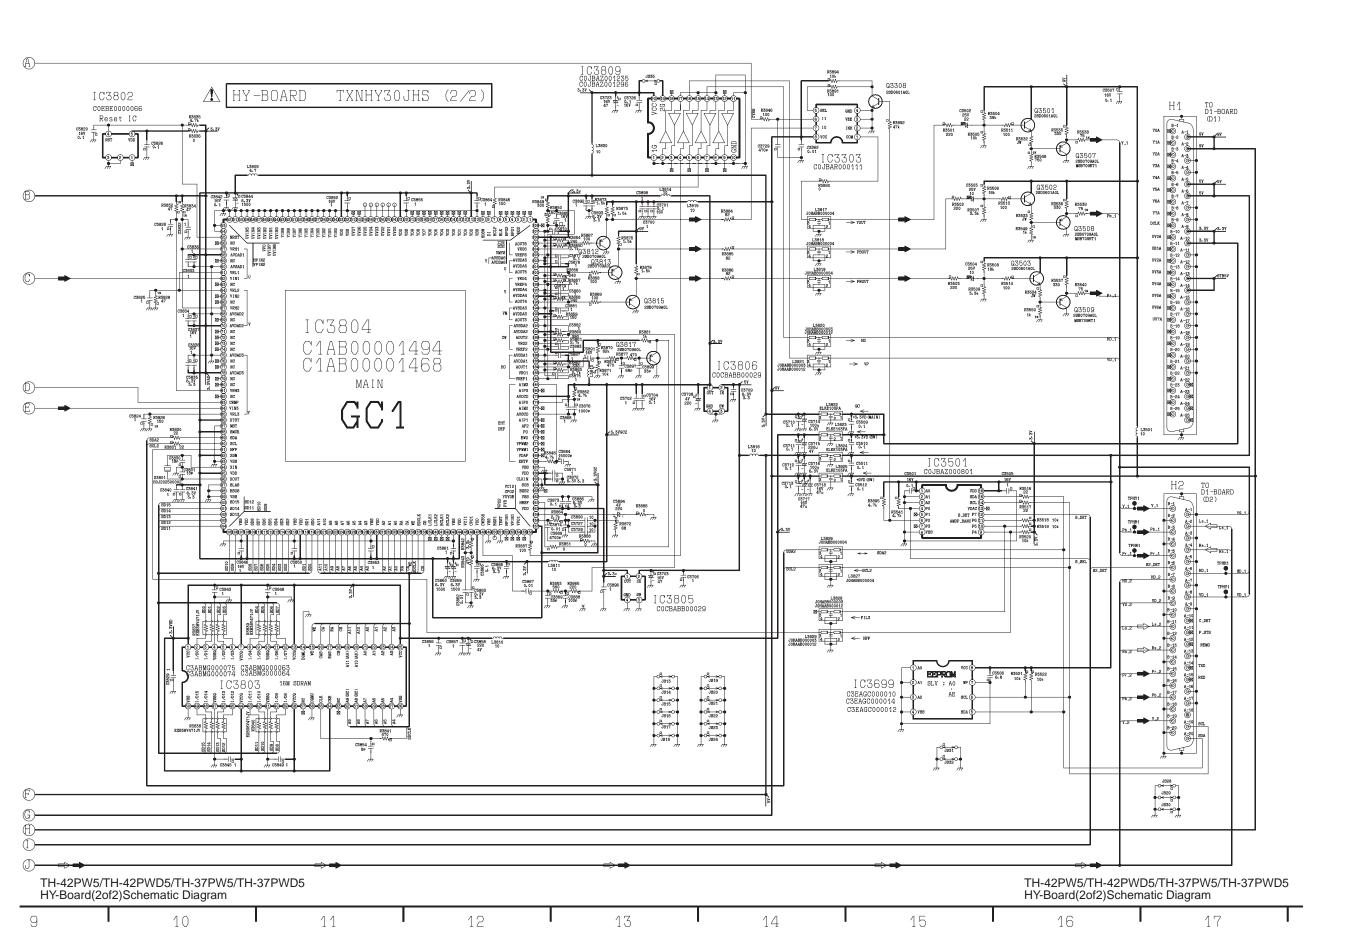

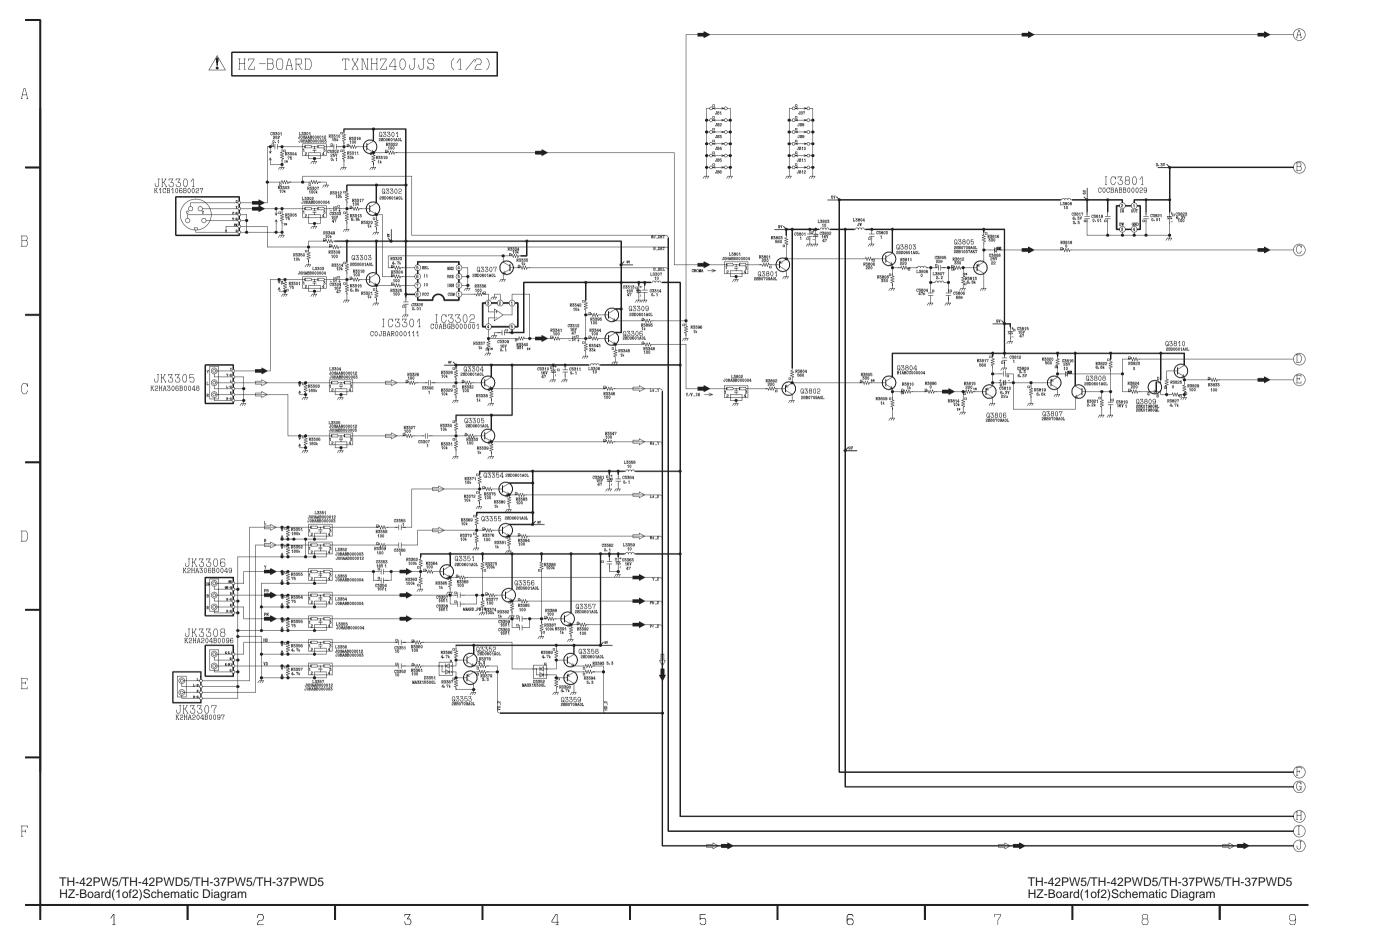

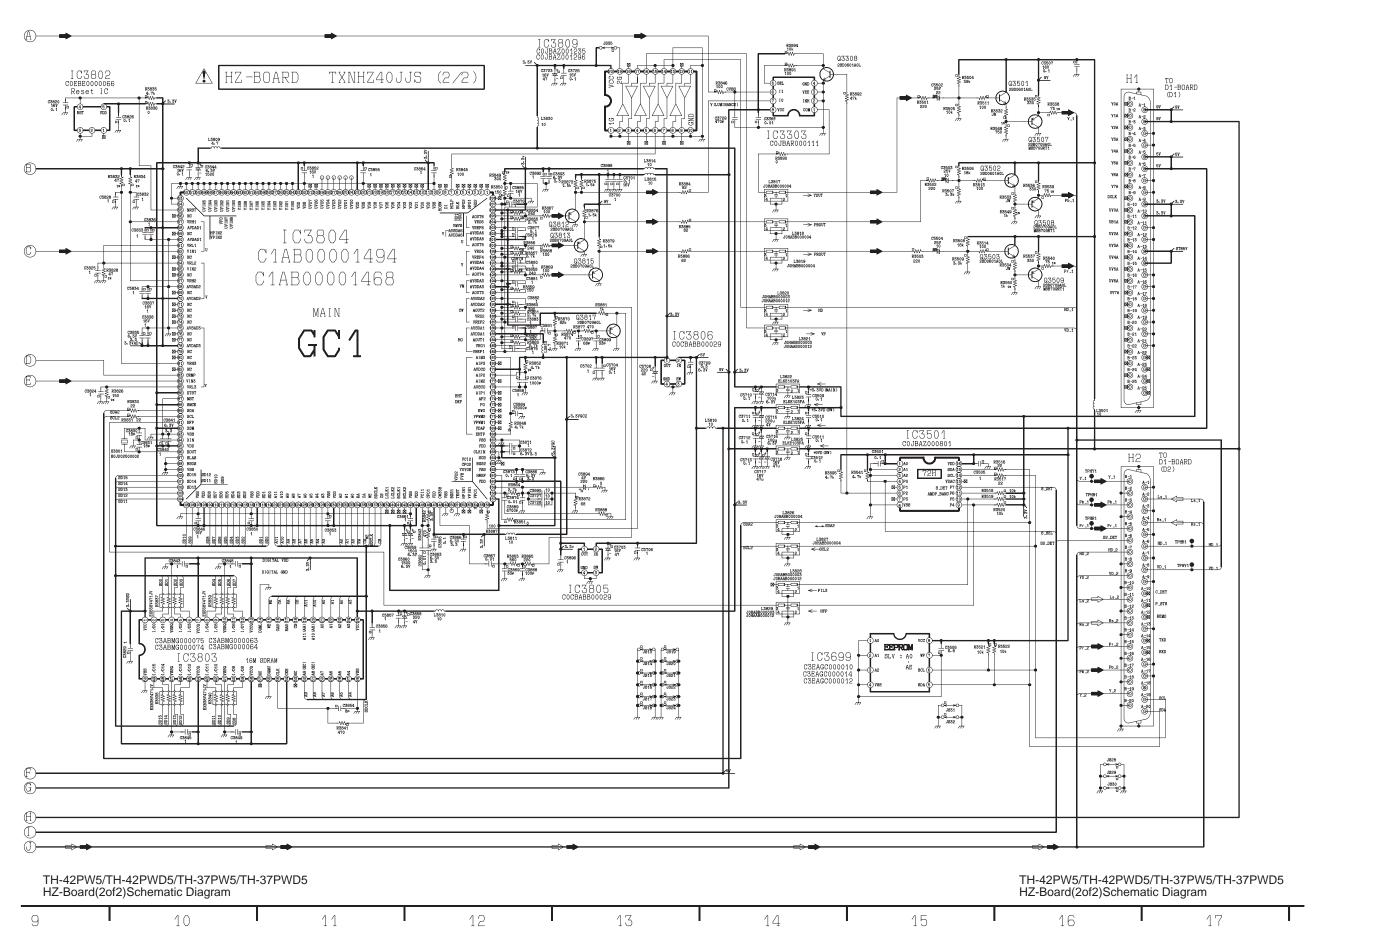

#### **Important Safety Notice**

Components identified by  $\Delta$  mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.

N	0	te	е	S	
---	---	----	---	---	--

ote	s:							
1.	Resistor							
	All resistors are cabon 1/4W resistor, unless ma	rked as fo	ollows:					
	Unit of resistance is OHM [w] (K=1,000, M=1,000,000).							
	: Nonflammable		: Metal Oxide					
	∴ : Solid	0	: Metal Film					
	: Wire Wound	$\bigotimes$	: Fuse:					
2.	Capacitor	Ü						
	All capacitors are ceramic 50V capacitor, unless	marked a	as follows:					
	Unit of capacitance is mF, unless otherwise note							
			: Electrolytic					
	Polyester		: Bipolar					
			: Dipped Tantalum					
		Z	: Z-Type					
3.		Ü						
	Unit of inductance is mF, unless otherwise noted	l.						
4.	Test Point							
5.	Earth Symbol							
	<del>//</del> : Chassis Earth (Cold)	$\perp$	: Line Earth (Hot)					
6.	Voltage Measurement	$\vee$						
	Voltage is measured by a DC voltmeter.							
	Conditions of the measurement are the following	g:						
	Power Source		.AC 120V, 50/60Hz					
			(UY/UZ VERSION model)/					
			AC220-240V, 50/60Hz					
			(Except UY/UZ VERSION)					
	Receiving Signal		. Colour Bar signal (RF)					
	All customer's controls		. Maximum positions					
7.	Number in red circle indicates waveform nembe	r.						
	(See waveform pattern table.)							
8.	. When arrow mark ( 🖊 ) is found, connection is easily found from the direction of arrow							
		-						
	Indicates the major signal flow. : Video →		\udio ⇒					
10. This schematic diagram is the latest at the time of printing and subject to change with								
	notice.							

#### Remarks:

 The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.


All circuits, except the Power Circuit, are cold.


Precautions


- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
   Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.
- 2. Following diodes are interchangeable.


MA150- MA162 (Replacement part)

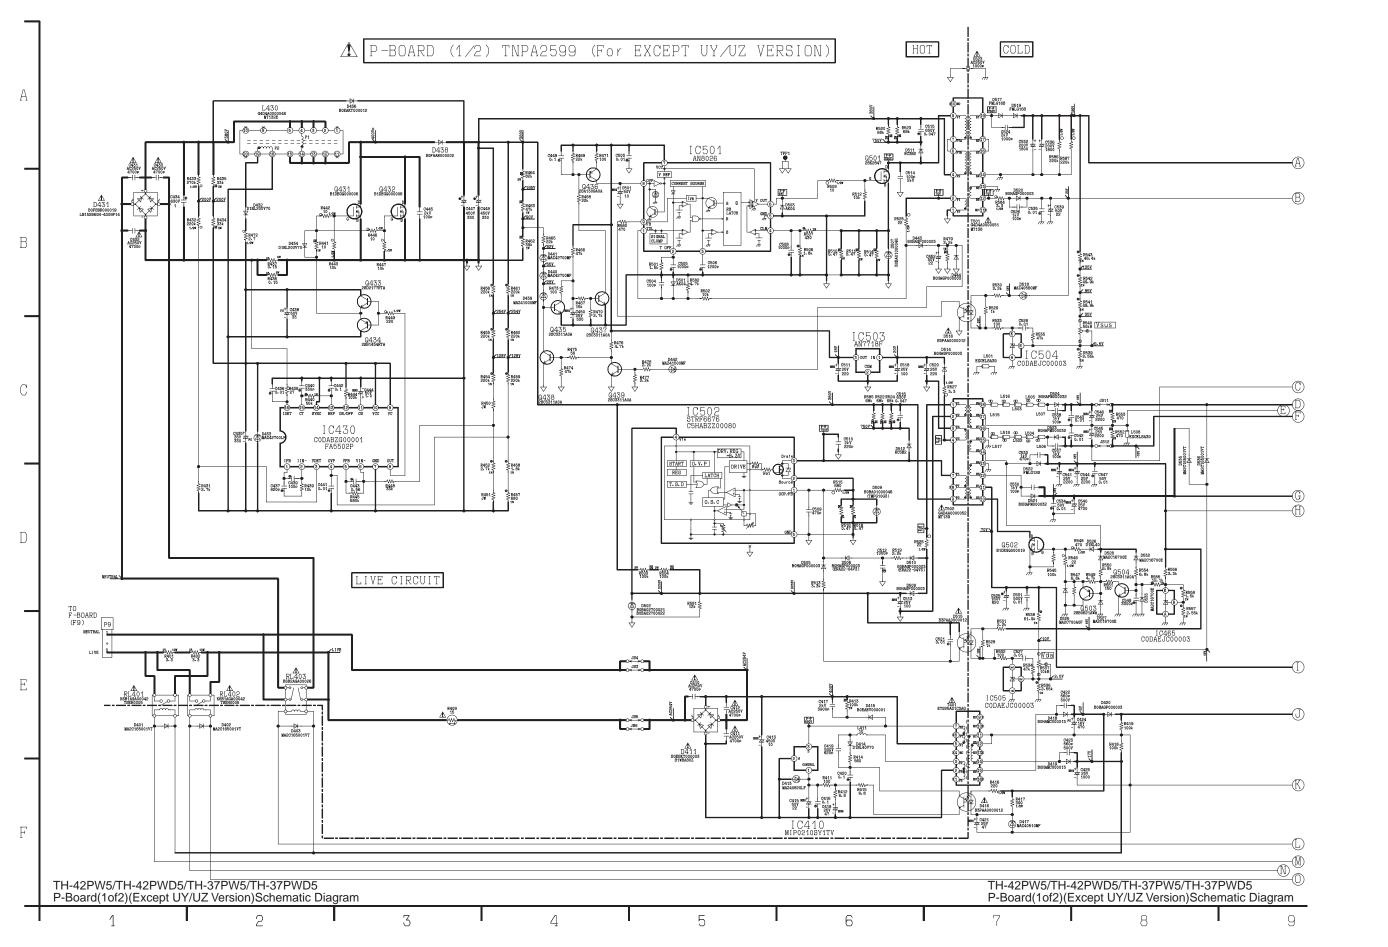


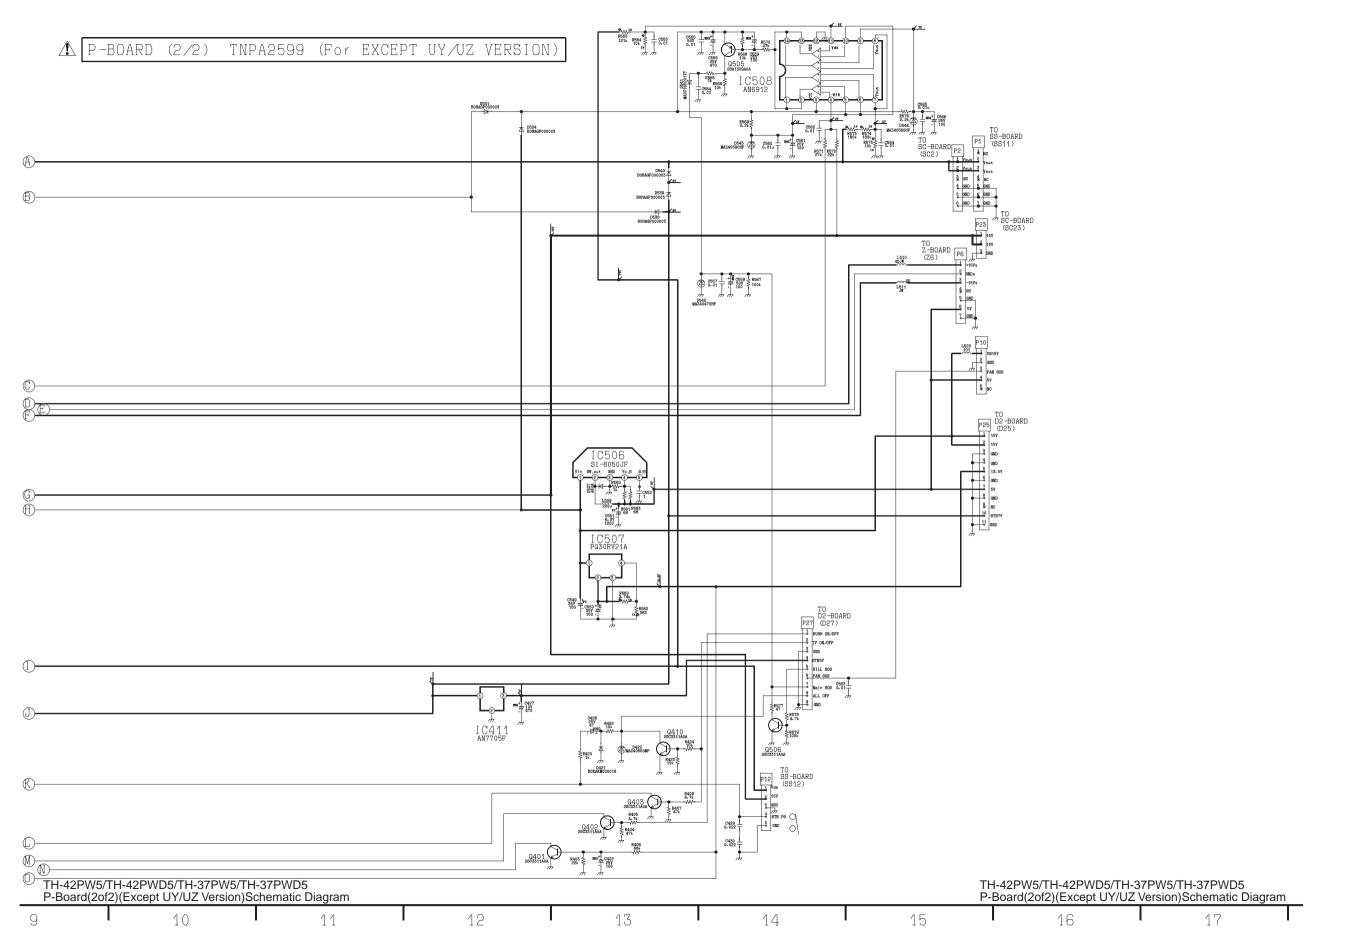


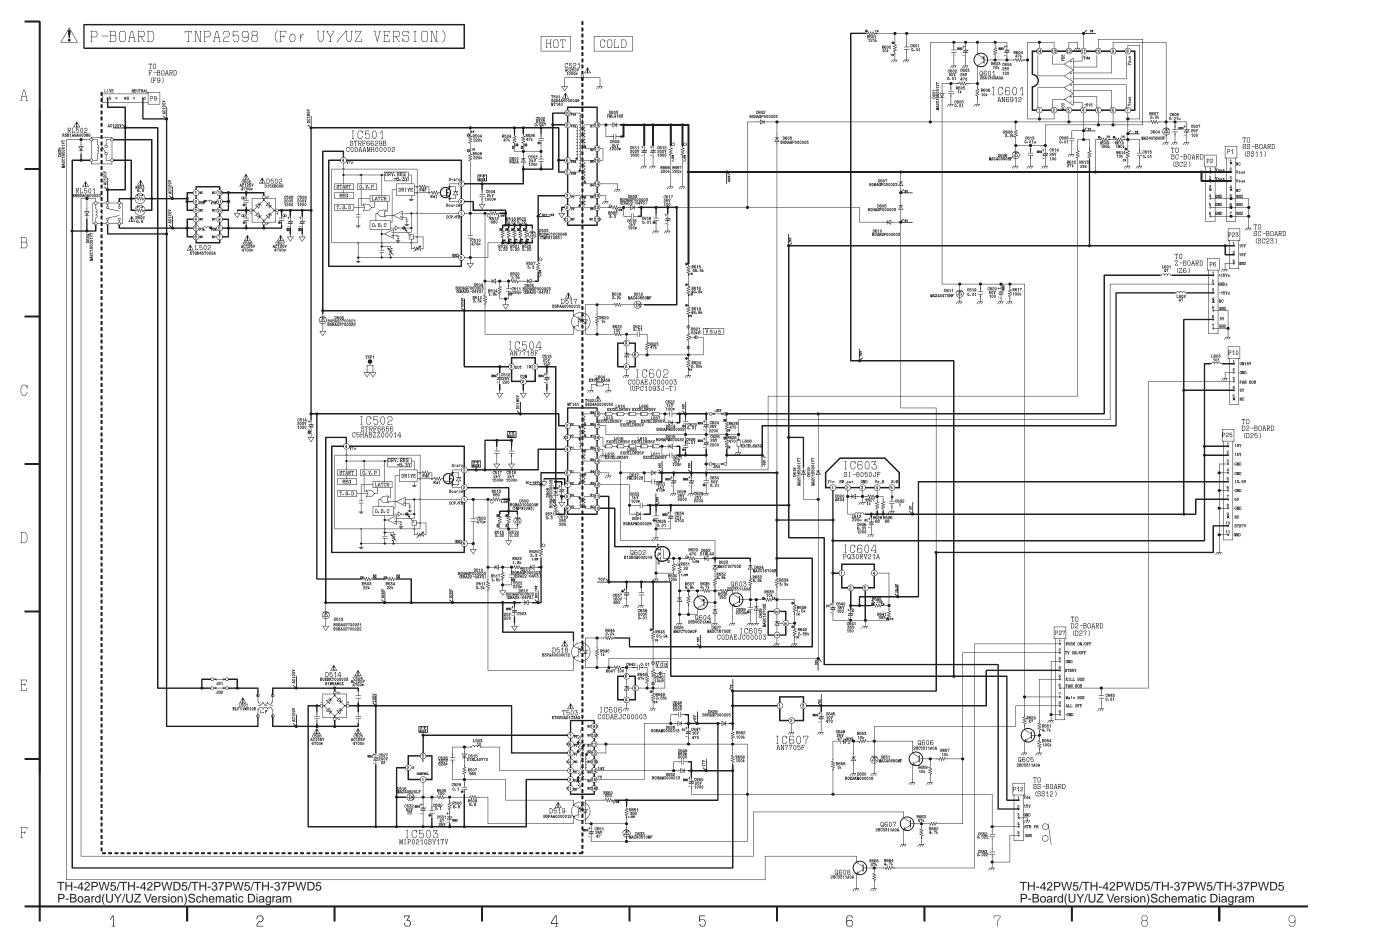


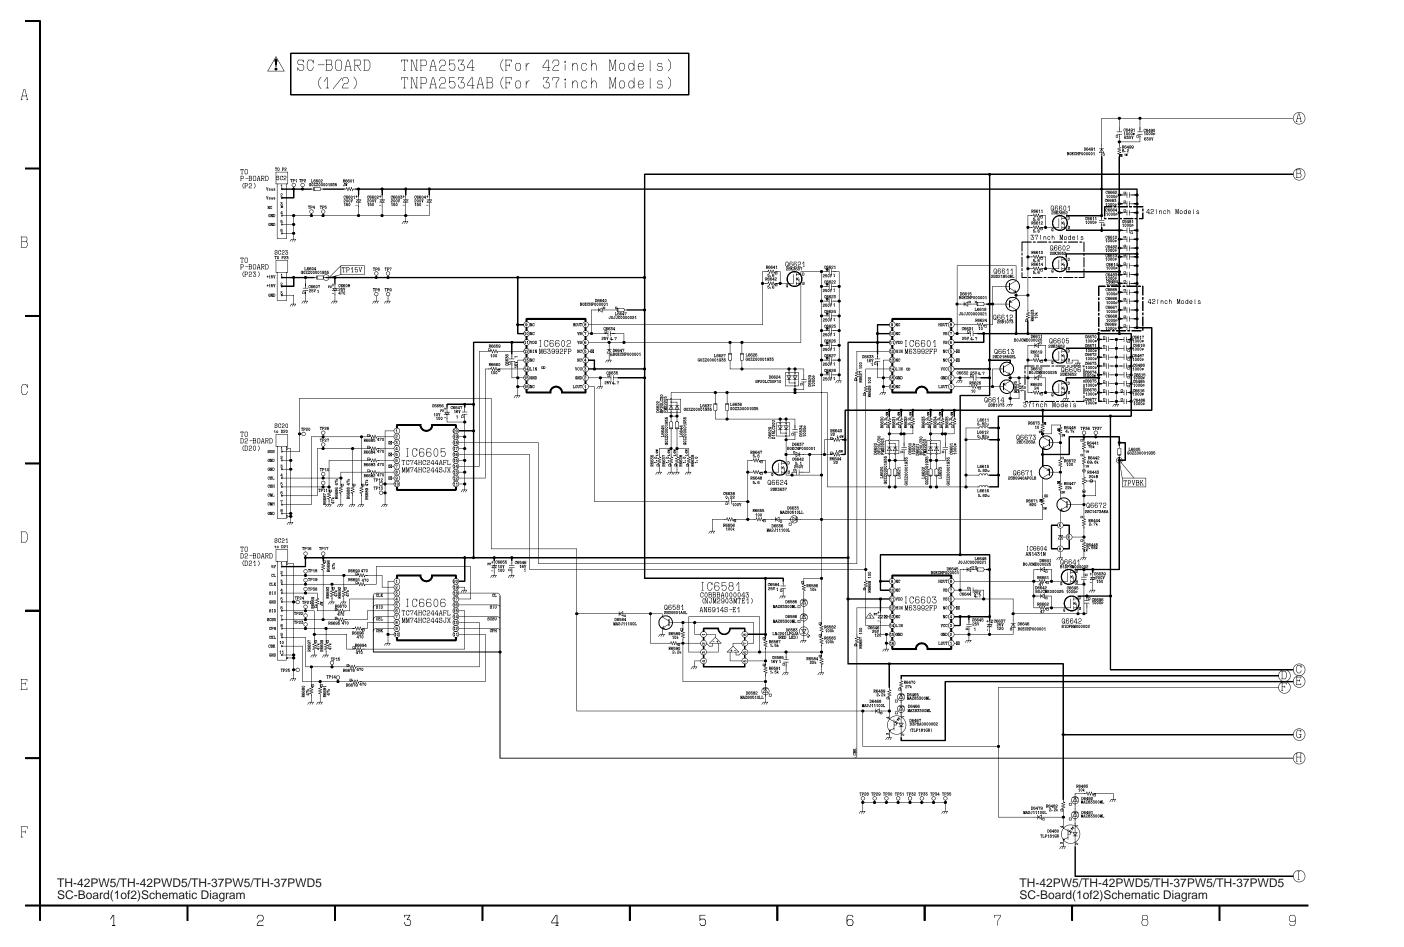


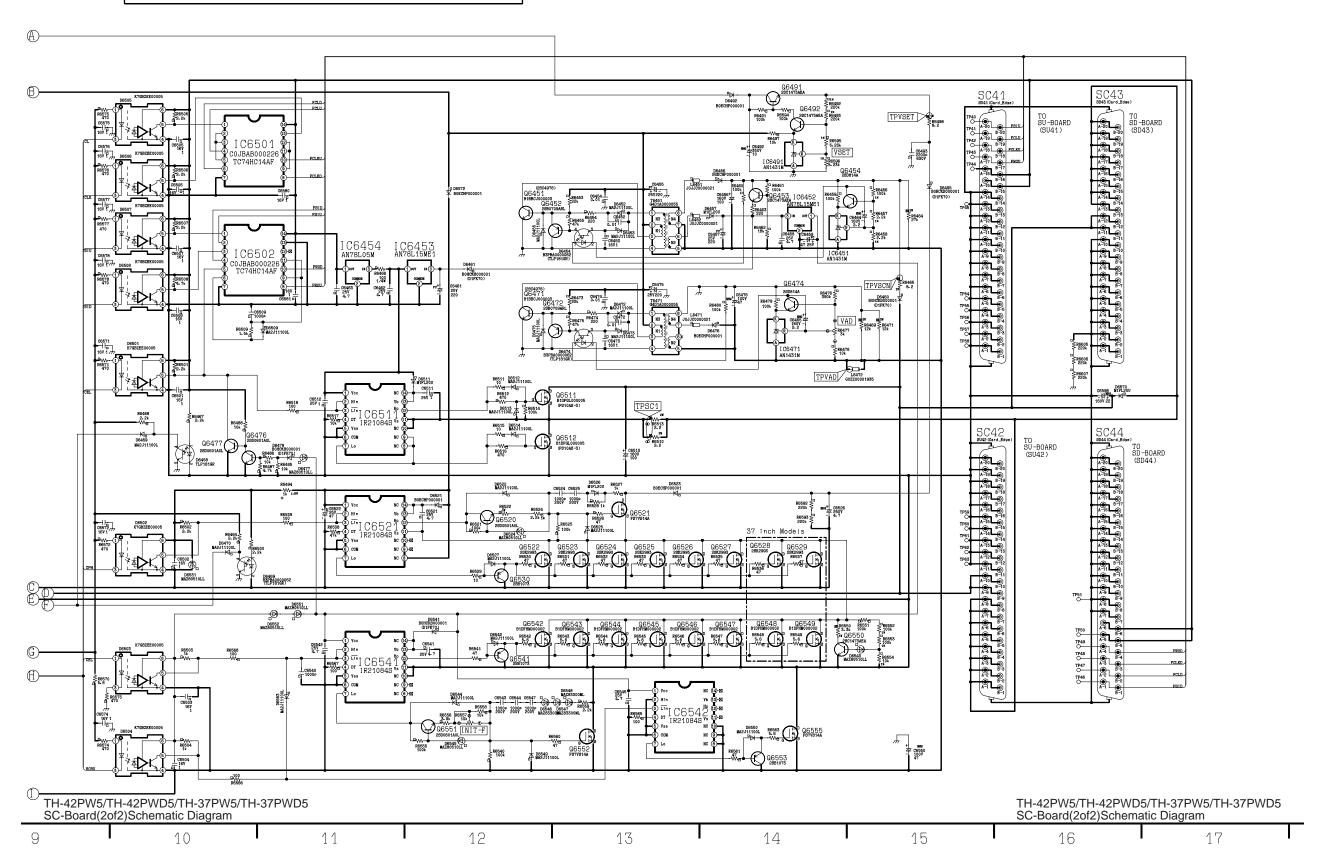


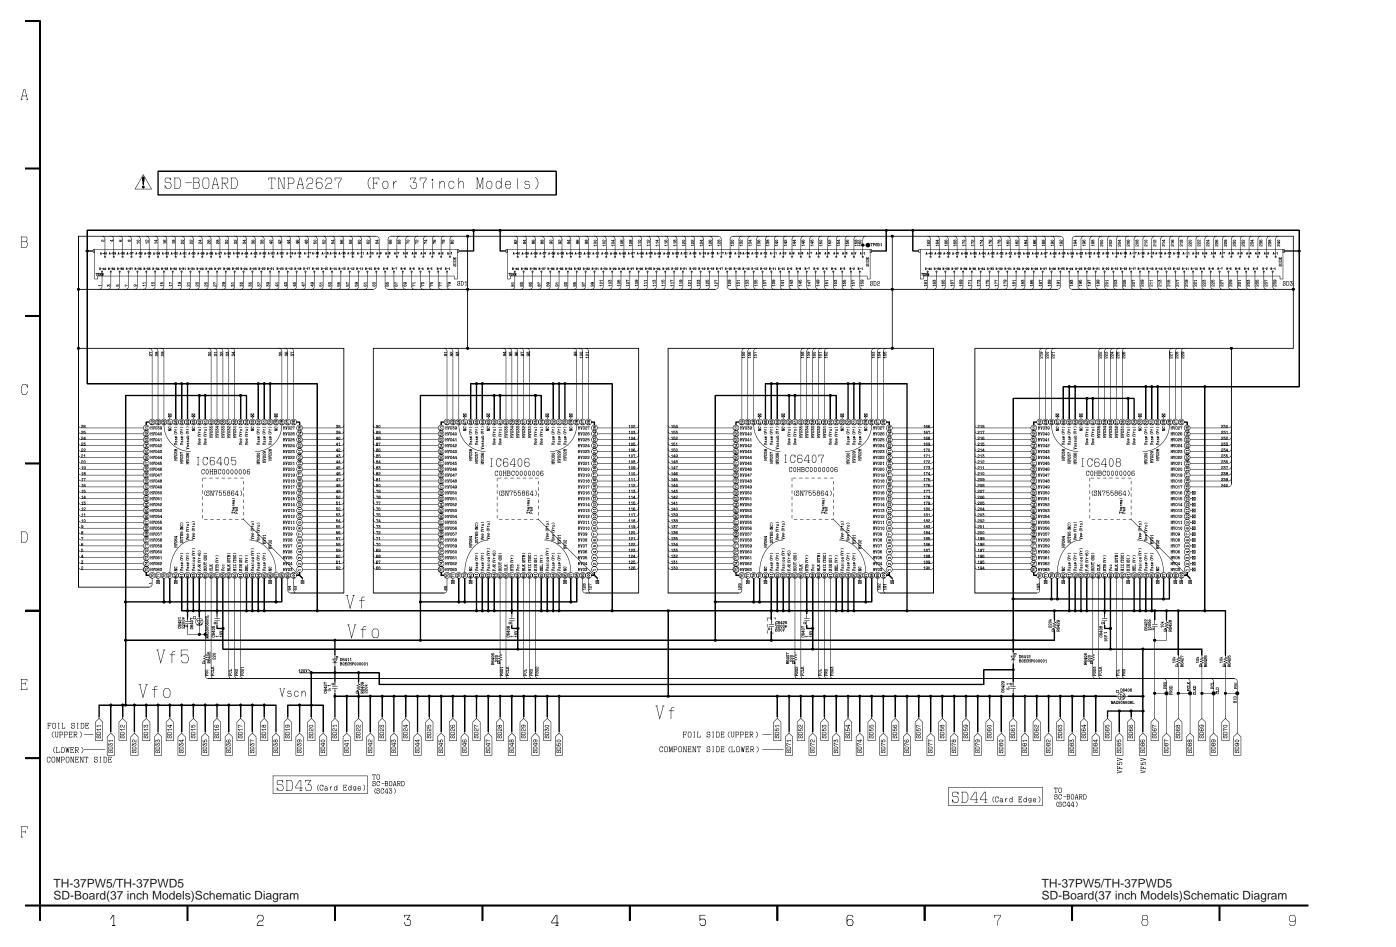

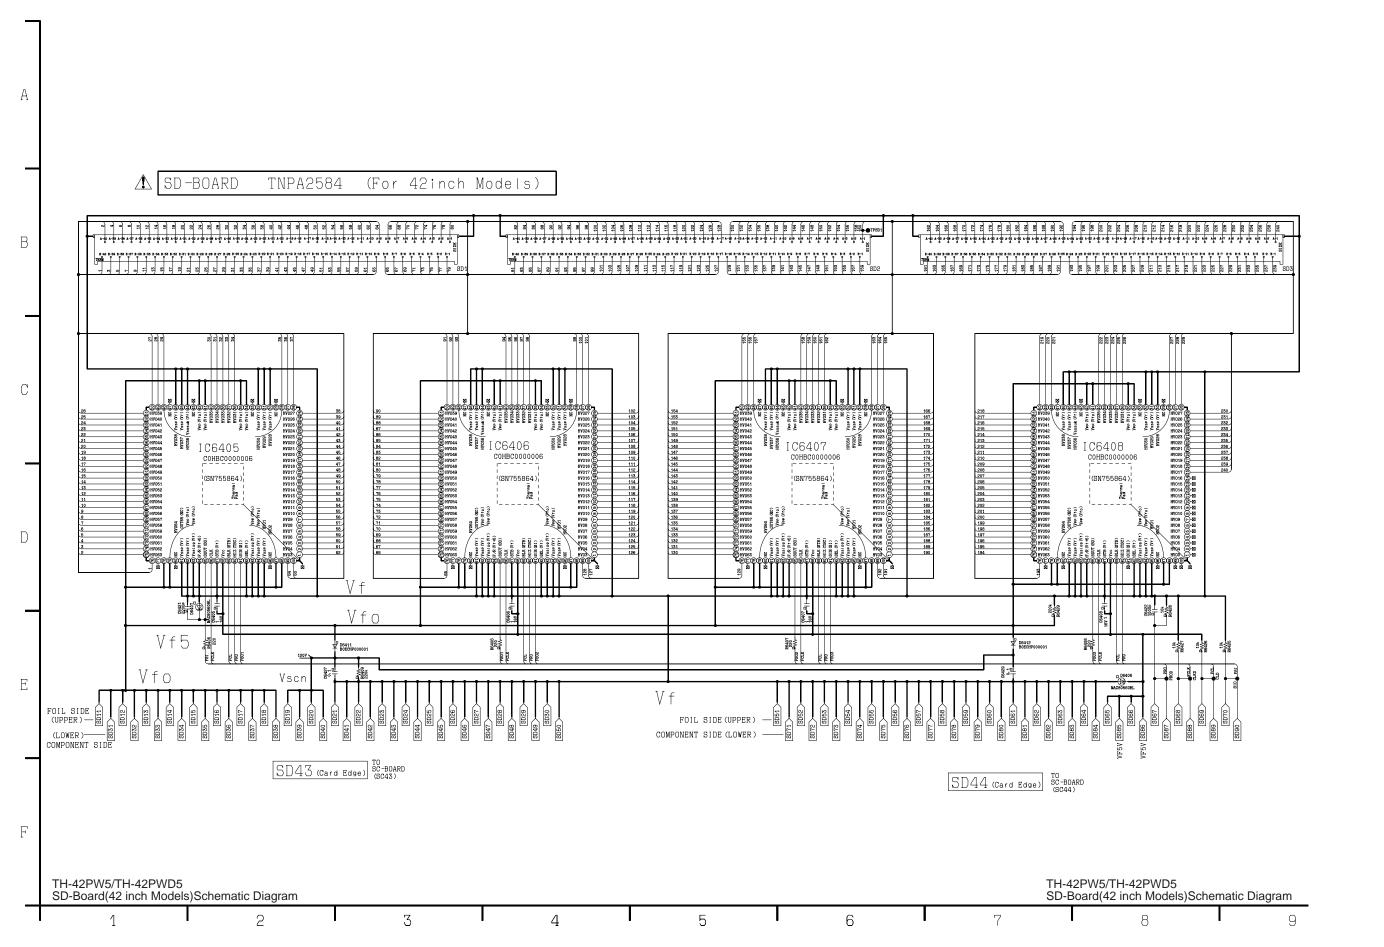

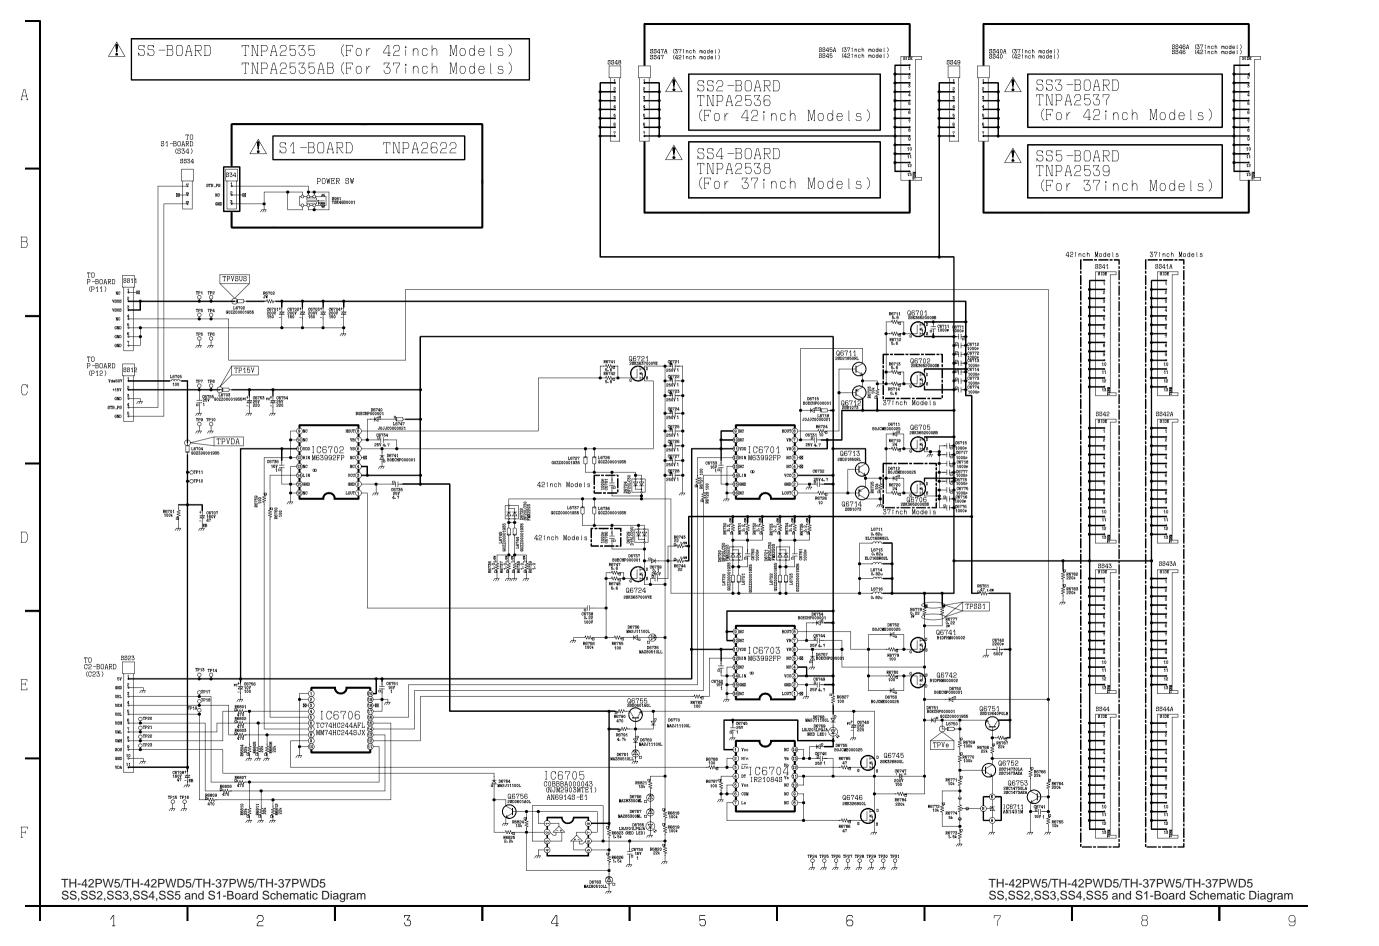

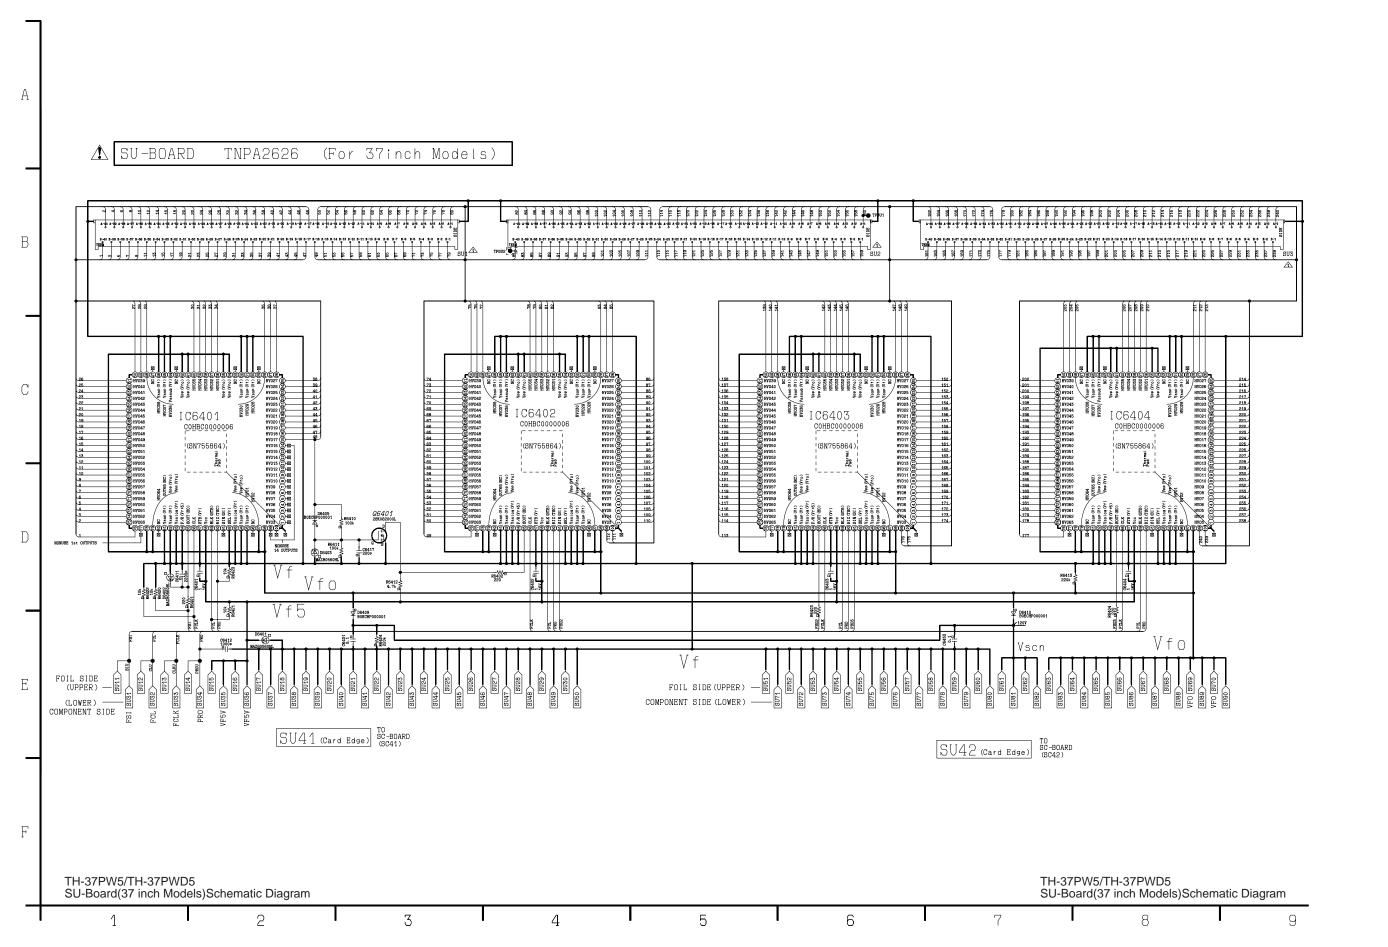

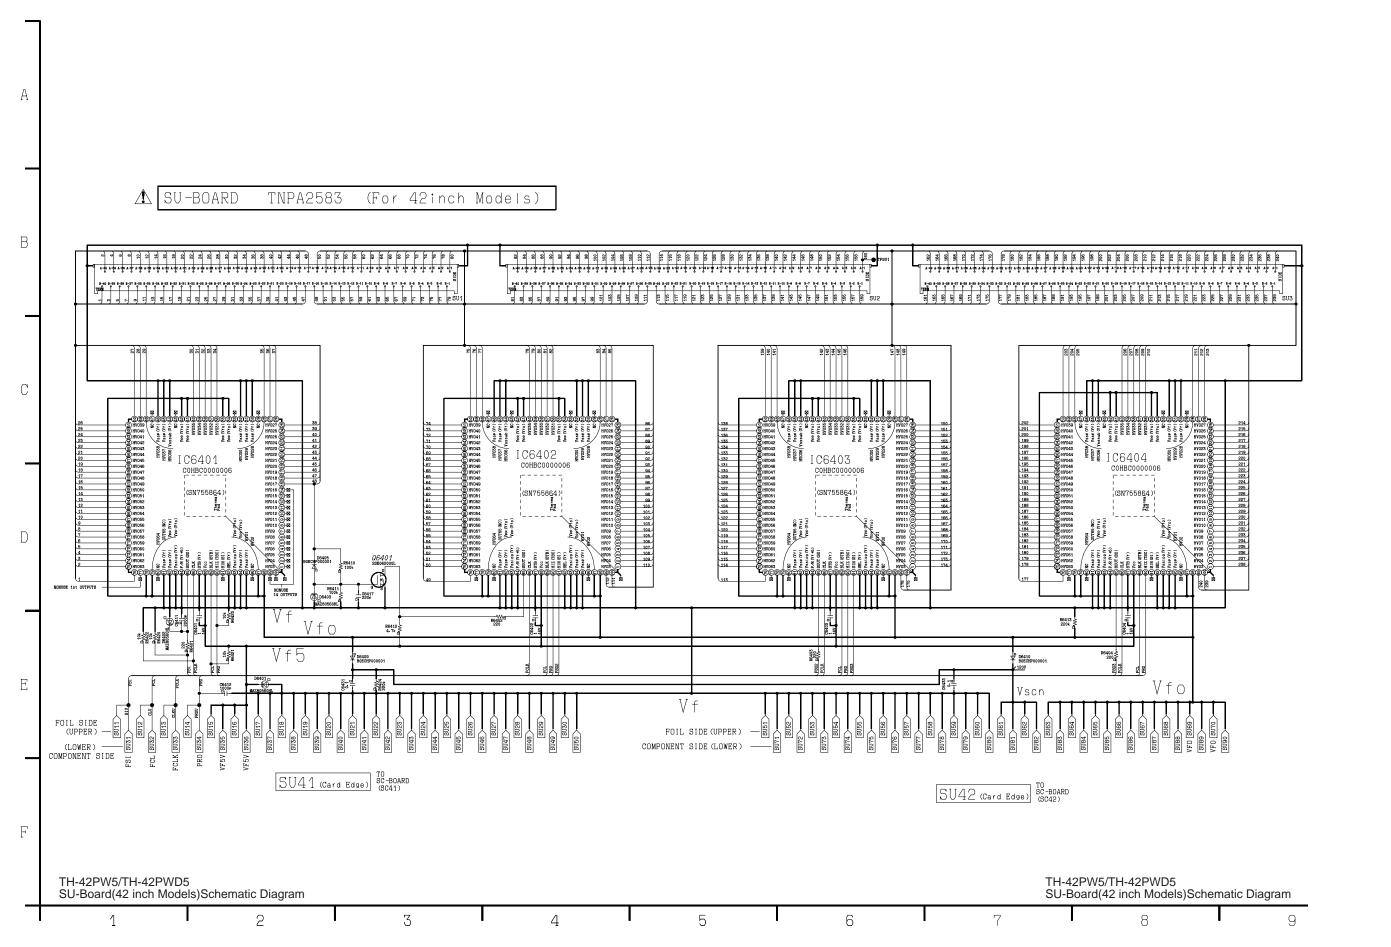

# 14 Block and Schematic Diagrams

## 14.1. Schematic Diagram Notes

	Components identified by $\Delta$ mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.					
Note						
	Resistor					
١.	All resistors are cabon 1/4W resistor, unless i	marked as f	follows:			
	Unit of resistance is OHM [W] (K=1,000, M=1,		ollows.			
	: Nonflammable	,	: Metal Oxide			
	↑ : Solid		: Metal Film			
		0	: Fuse:			
2	☐ : Wire Wound  Capacitor	$\otimes$	. ruse.			
۷.	All capacitors are ceramic 50V capacitor, unle	oss markad	as follows:			
	Unit of capacitance is mF, unless otherwise no		as follows.			
		otea. <del>-</del> †‡ <del>'</del>	: Electrolytic			
	in Polyester	NP H				
	<ul><li>m : Netalized Polyester</li></ul>	TH-	: Dipped Tantalum			
	☐ : Metalized Folyester ☐ : Polypropylene	(T) (Z)	: Z-Type			
3	Coil	2	. <b>2</b> -1 ype			
٥.	Unit of inductance is mF, unless otherwise no	ted				
4.	Test Point	ieu.				
٦.	○ : Test Point position					
5.	Earth Symbol					
٥.	# : Chassis Earth (Cold)	1	: Line Earth (Hot)			
6.	Voltage Measurement	ightharpoons	. Line Latin (110t)			
0.	Voltage is measured by a DC voltmeter.					
	Conditions of the measurement are the follow	ina:				
	Power Source	•	AC 120V 50/60Hz			
	1 Ower Source		(UY/UZ VERSION model)/			
			AC220-240V, 50/60Hz			
			(Except UY/UZ VERSION)			
	Receiving Signal					
	All customer's controls		Maximum positions			
7	Number in red circle indicates waveform nem		Waximum positions			
٠.	(See waveform pattern table.)	Der.				
8.	When arrow mark ( / ) is found, connection i	e paeily fou	nd from the direction of arrow			
0.	When arrow mark ( / ) is round, connection i	s casily lou	nd from the direction of arrow			
9	Indicates the major signal flow. : Video	<b>→</b>	Audio ⇒			
	This schematic diagram is the latest at the tin					
. •	notice.		g and adapted to analogo without			

**Important Safety Notice** 

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 Schematic Diagram Notes

#### Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.

The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.


All circuits, except the Power Circuit, are cold.

**Precautions** 


- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
   Connect the earth of instruments to the earth connection of the circuit being
- d. Make sure to disconnect the power plug before removing the chassis.
- 2. Following diodes are interchangeable.

MA150- MA162 (Replacement part)


### 14.2. Main Block Diagram

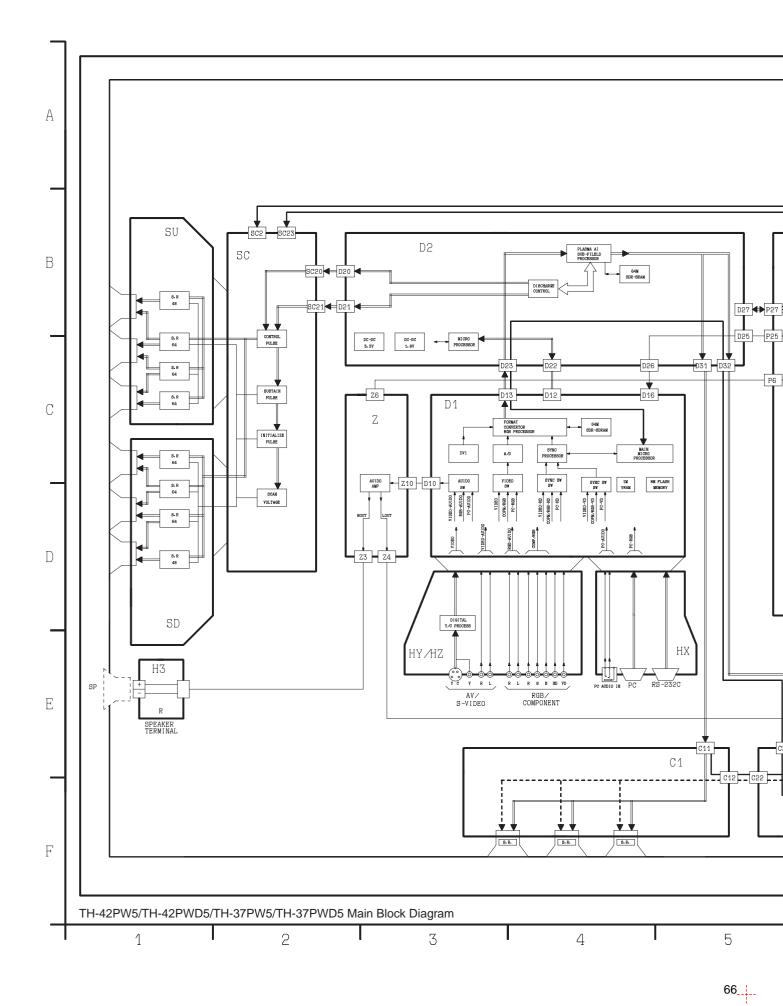




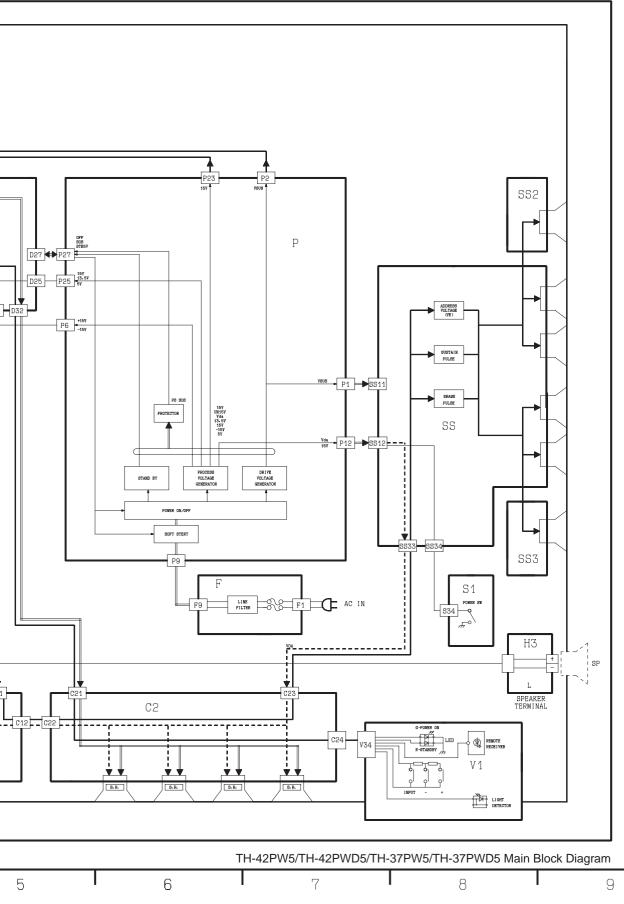

## 14.3. Power (UY/UZ Version) Block Diagram

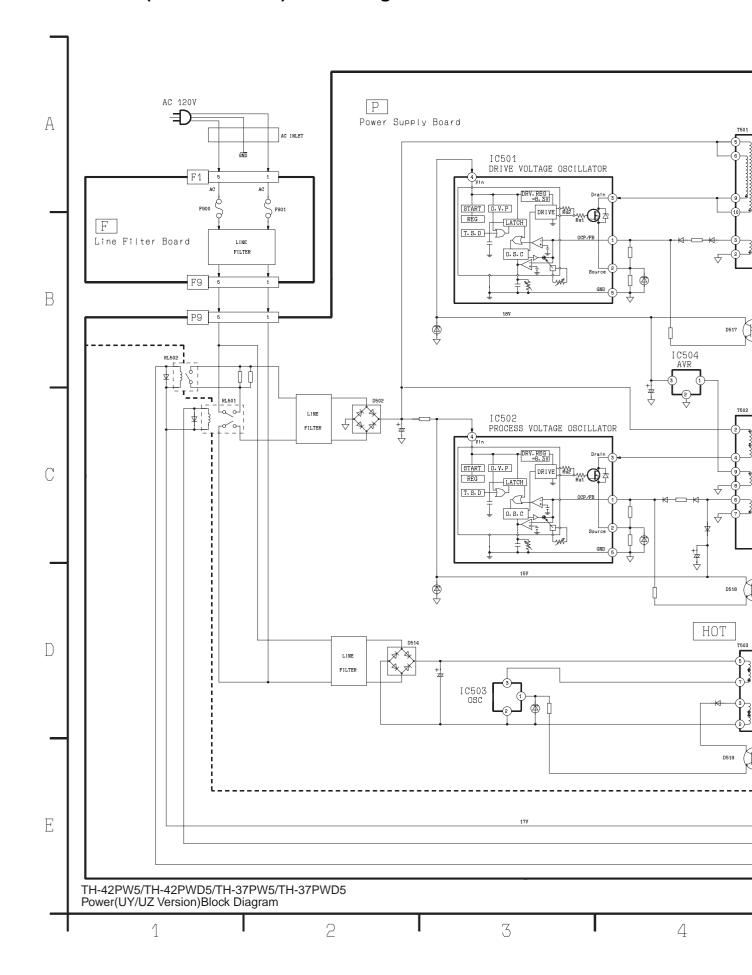



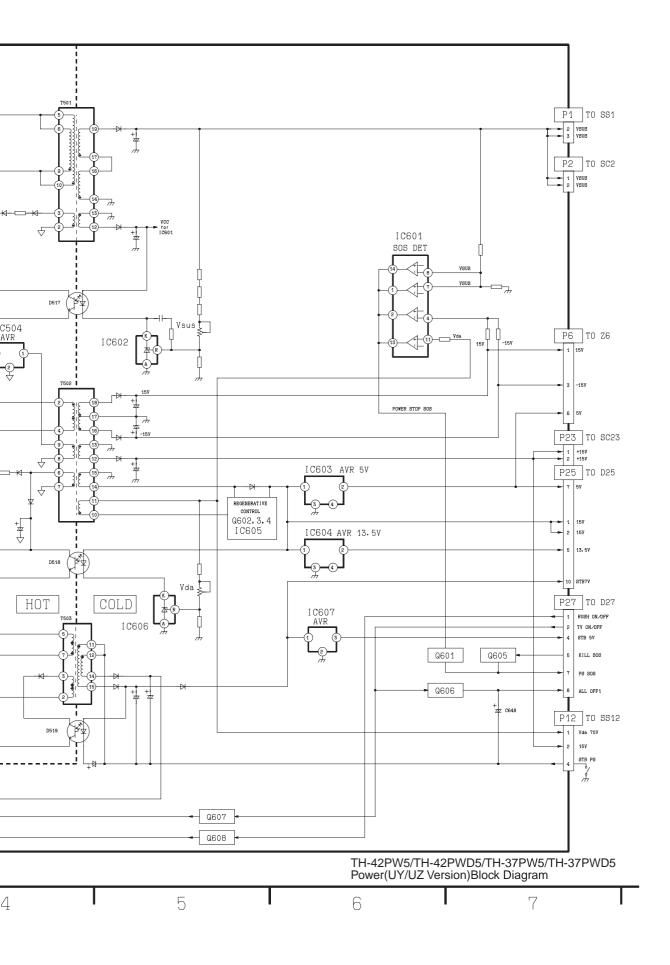


### 14.4. F-Board Schematic Diagram


А F-BOARD TXN/F1MMSE UY/UZ VERSION LIVE CIRCUIT В TO P-BOARD (P9) AC INLET COLD  $\mathbb{C}$ F-BOARD TXN/F10MMS UY/UZ VERSION) HOT LIVE CIRCUIT  $\mathbb{D}$ TO P-BOARD (P9) COLD Е TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 F-Board Schematic Diagram 2 3

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5
F-Board Schematic Diagram


5

### 14.5. P-Board (UY/UZ Version) Schematic Diagram

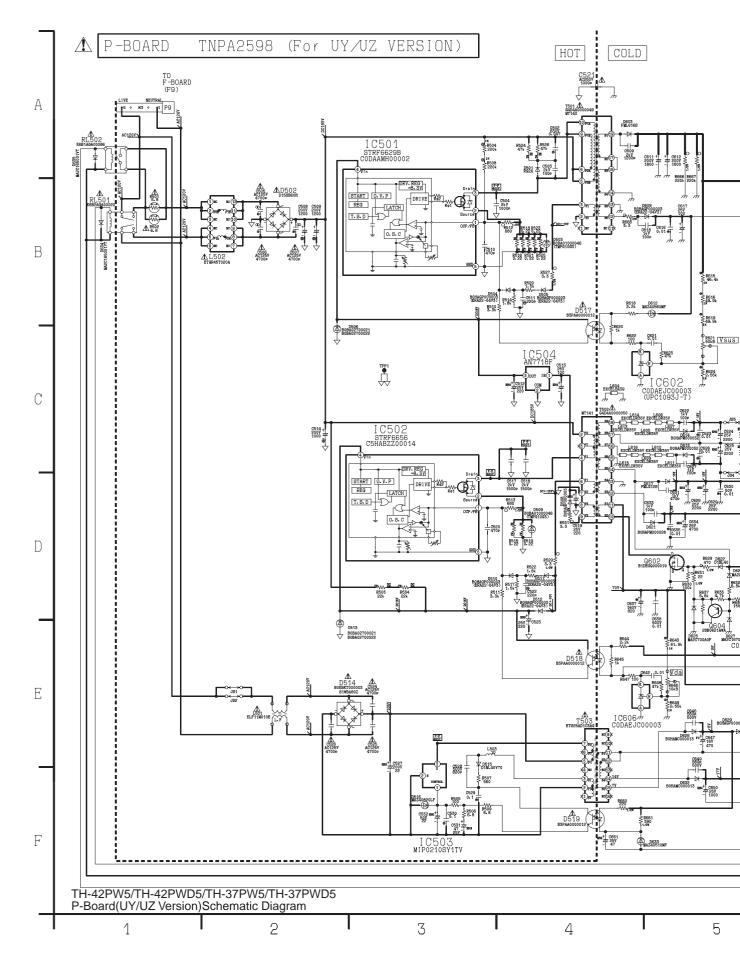


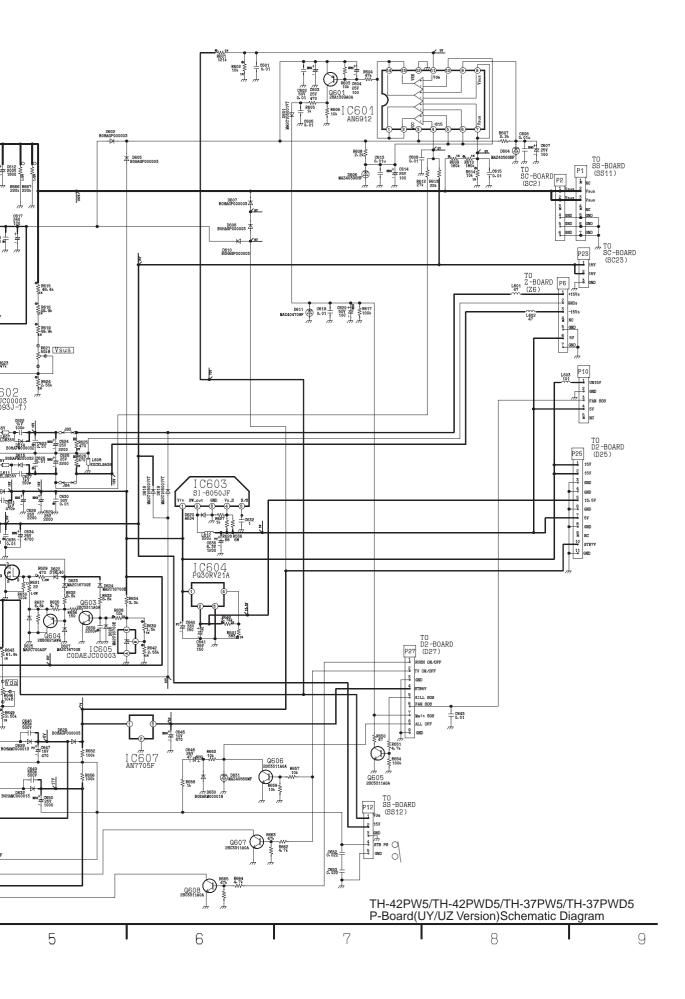


## 14.6. Power (Except UY/UZ Version) Block Diagram

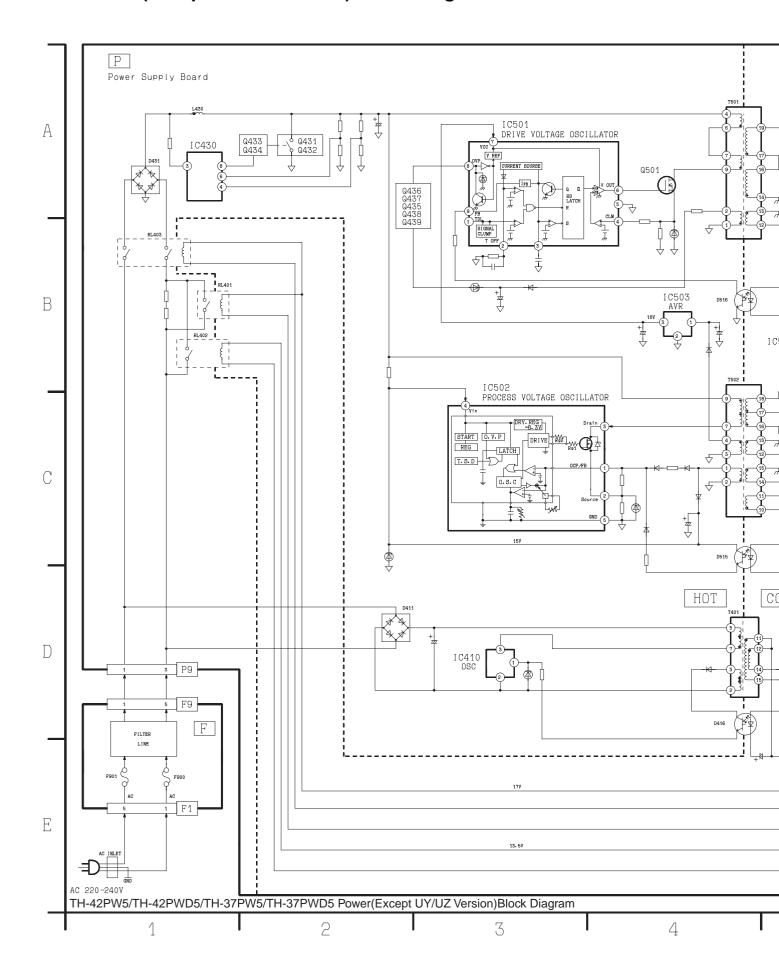




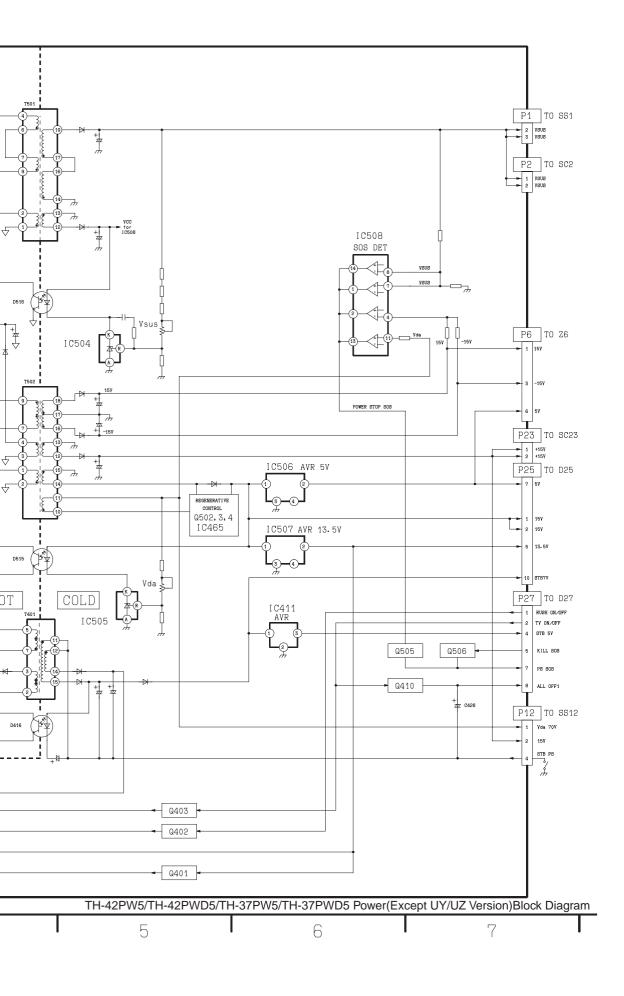


## 14.7. P-Board (1 of 2) (Except UY/UZ Version) Schematic Diagram

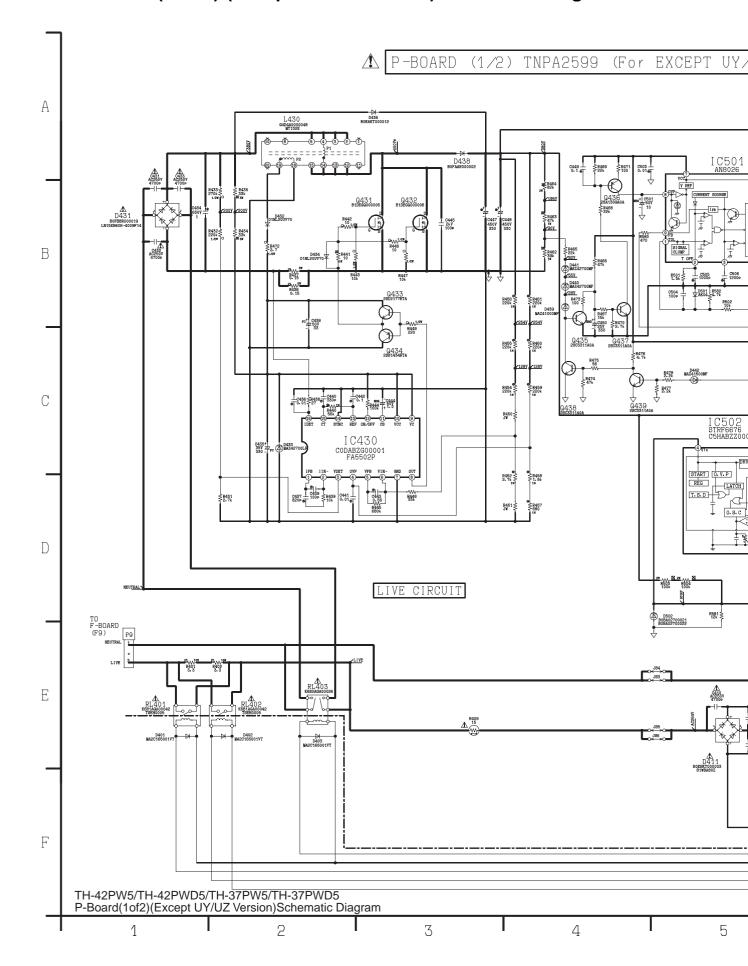

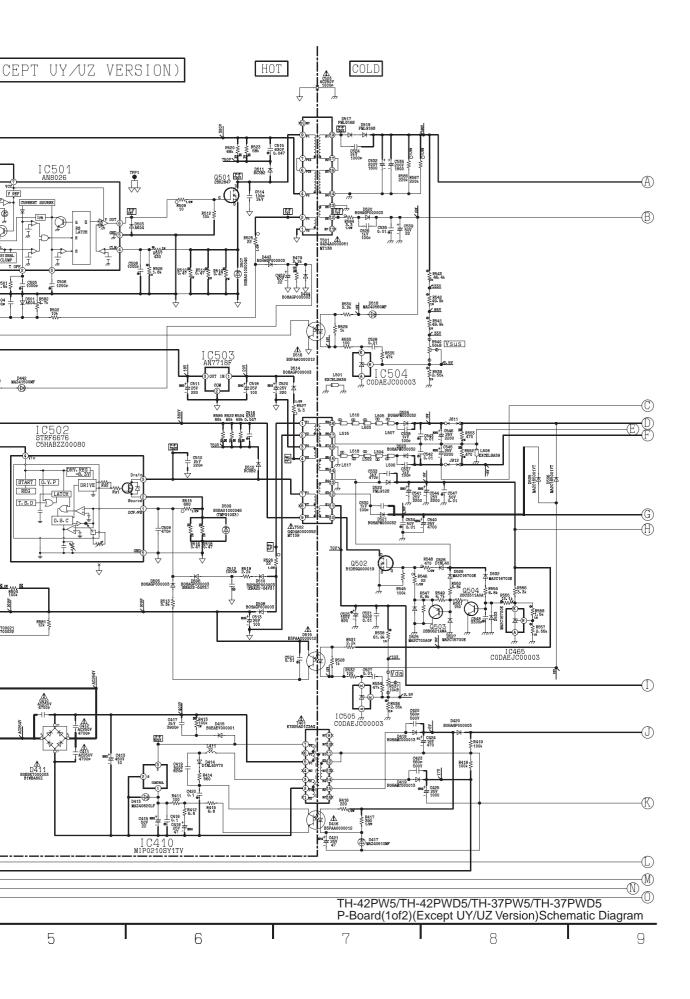


#### ----


## 14.8. P-Board (2 of 2) (Except UY/UZ Version) Schematic Diagram

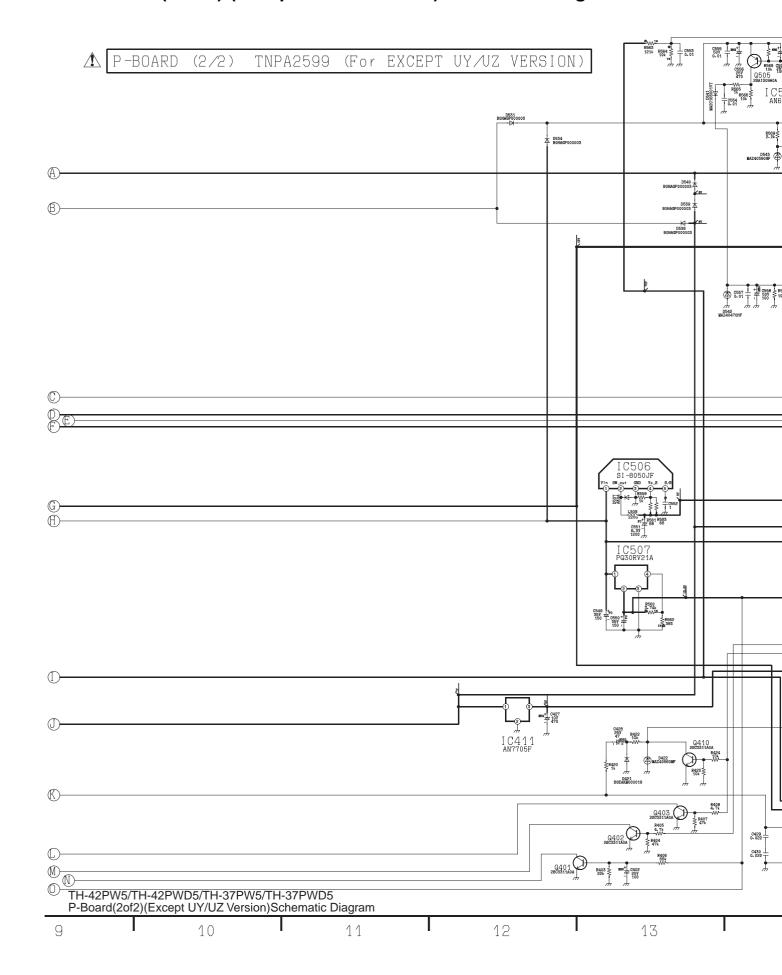



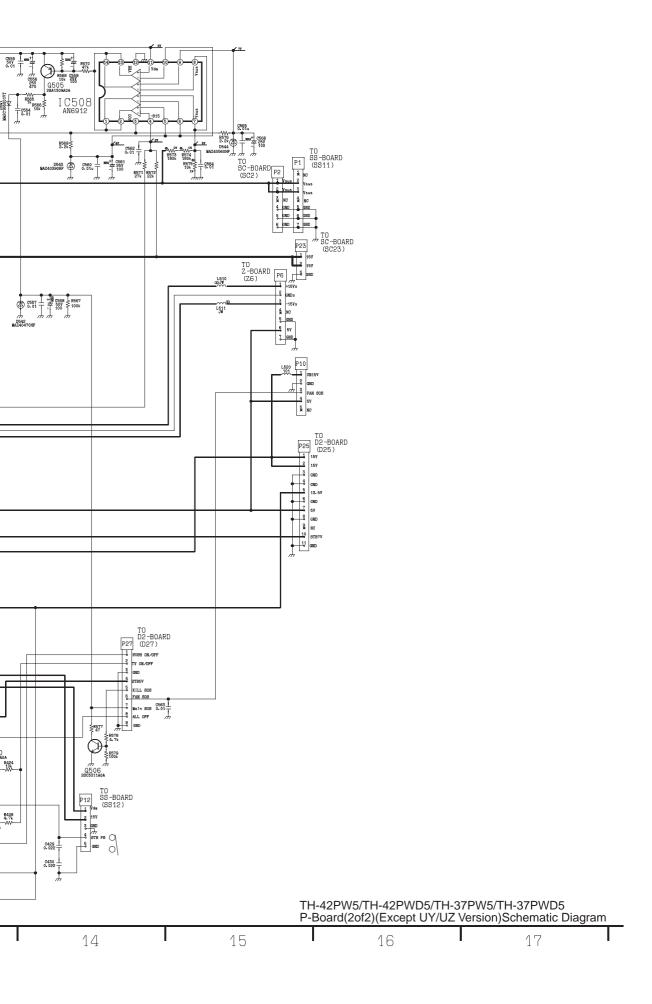


## 14.9. HX-Board Block Diagram

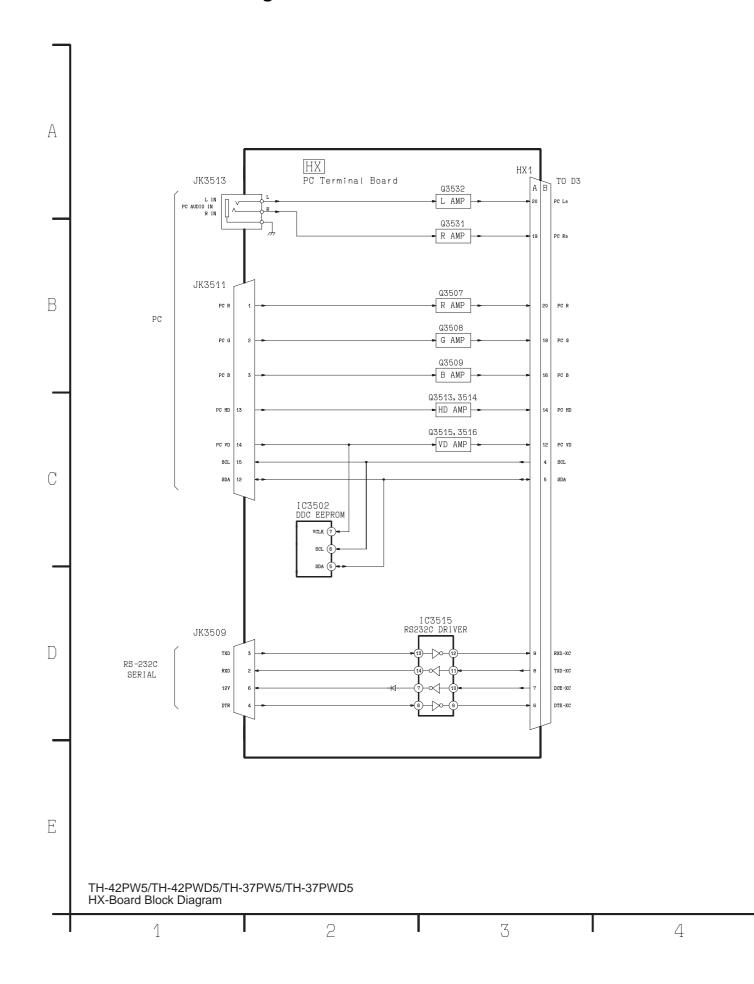


TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HX-Board Block Diagram

1 5 6 7

#### 14.10. HX-Board Schematic Diagram

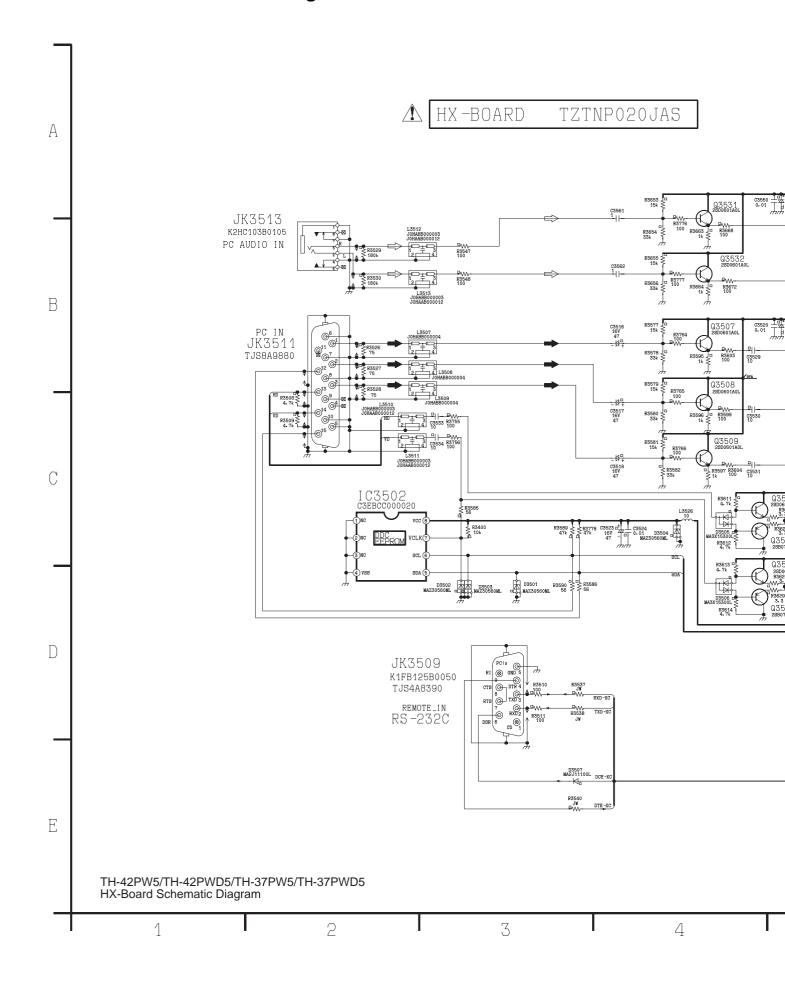



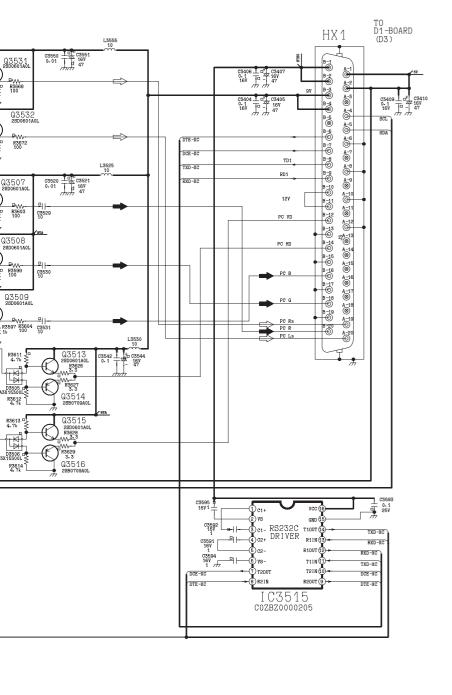



TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 HX-Board Schematic Diagram




#### ----

#### 14.11. HY and HZ-Board Block Diagram

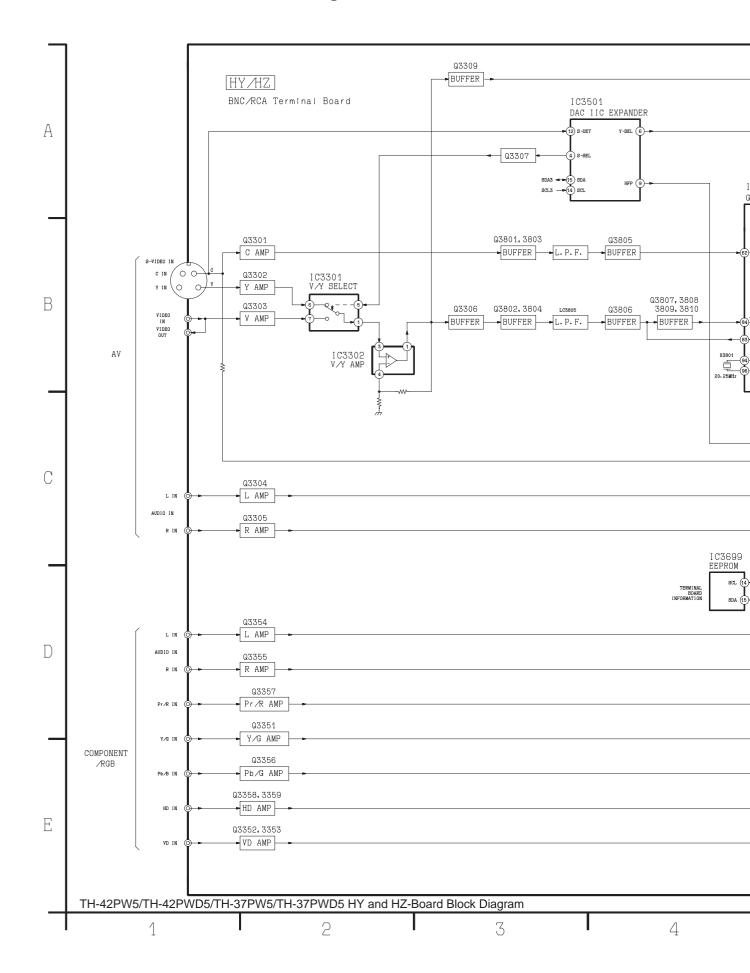


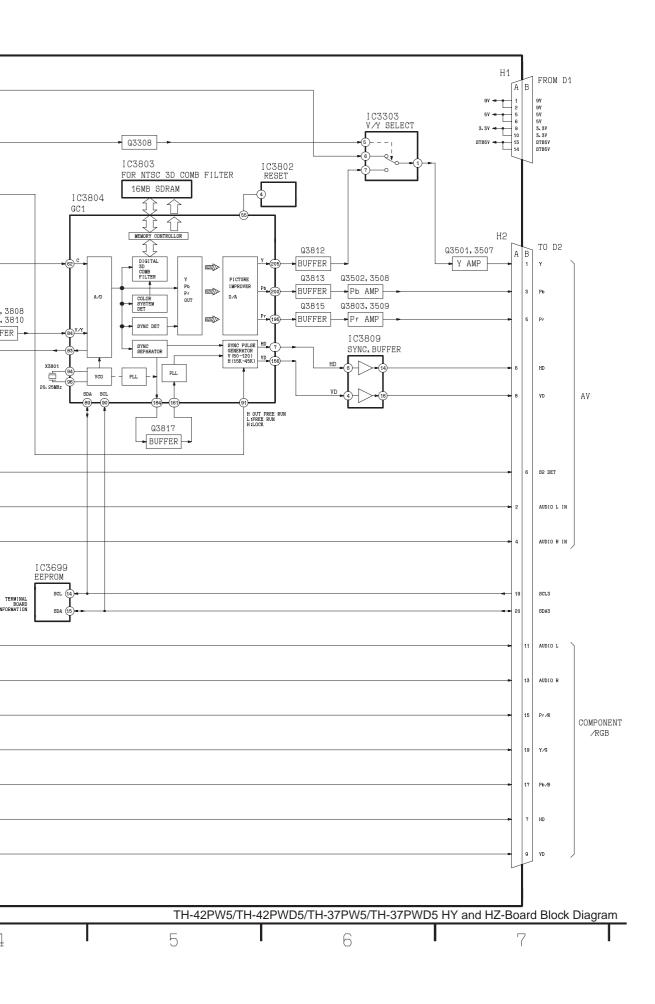


## 14.12. HY-Board (1 of 2) Schematic Diagram

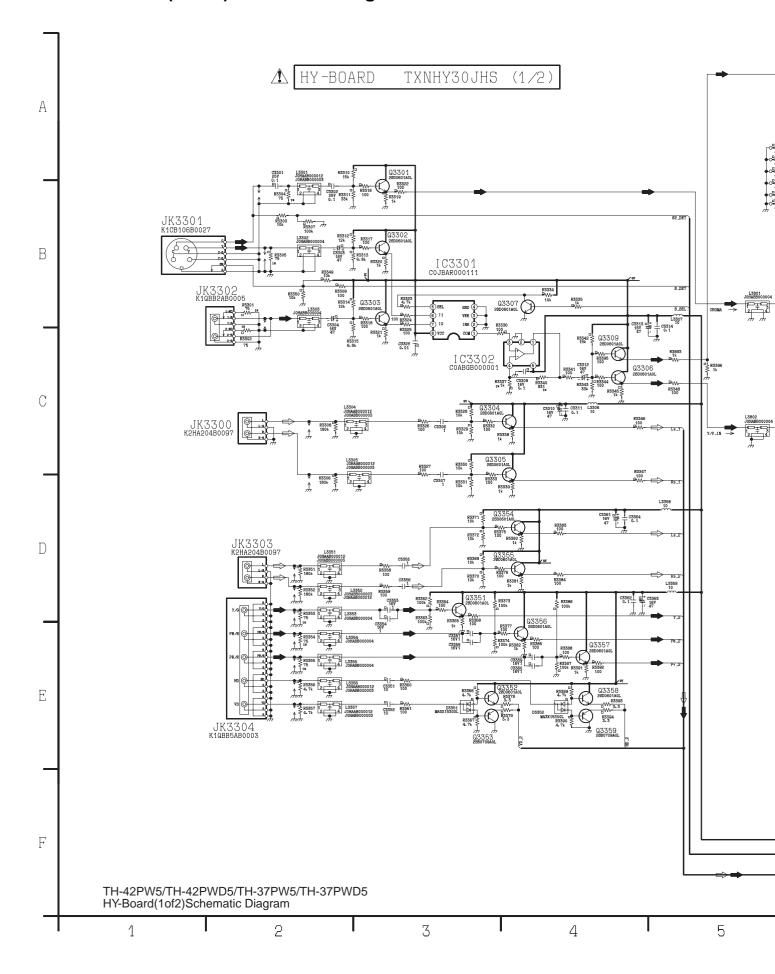




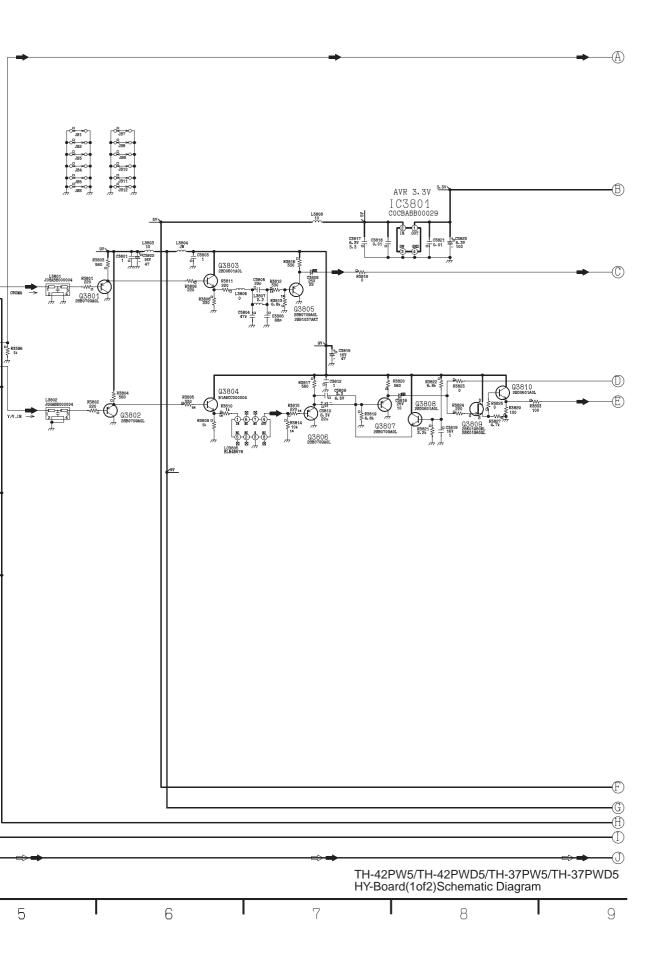


## 14.13. HY-Board (2 of 2) Schematic Diagram

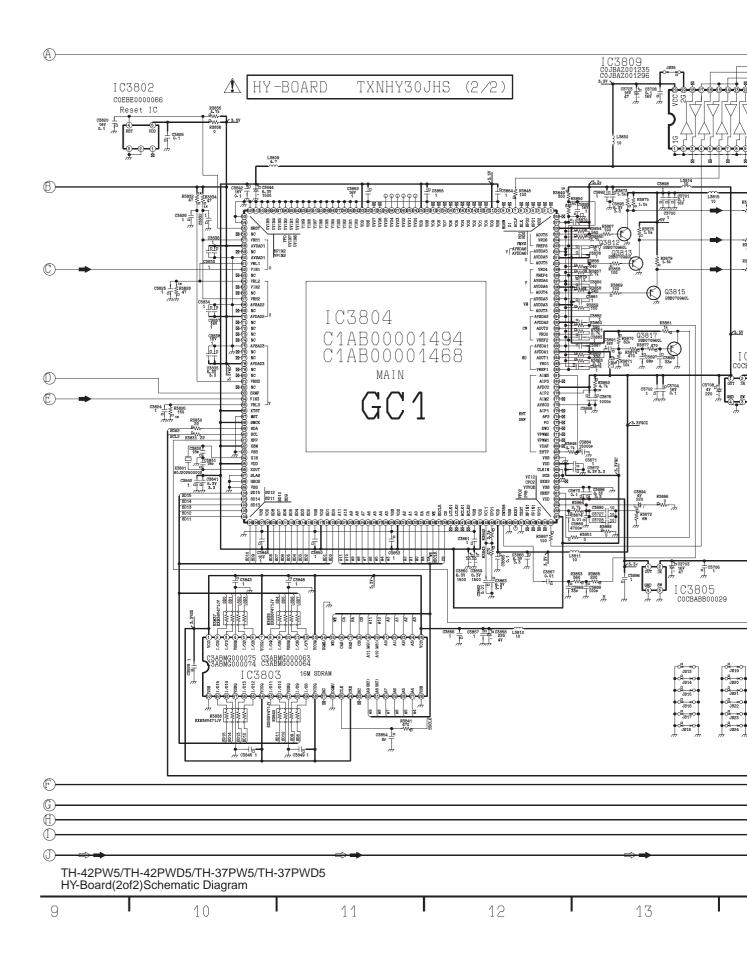




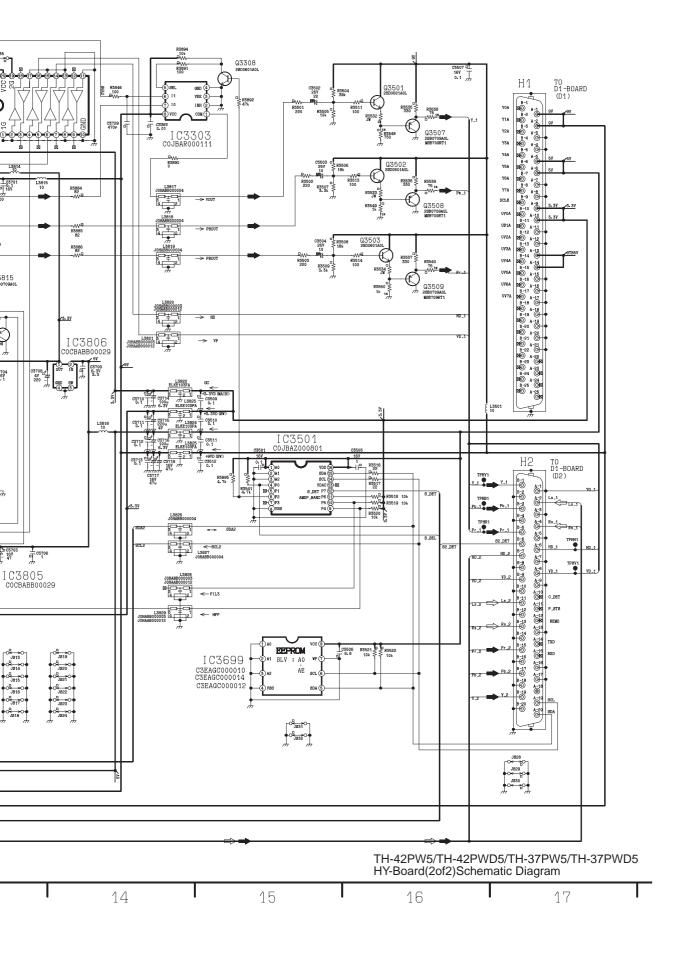


# 14.14. HZ-Board (1 of 2) Schematic Diagram

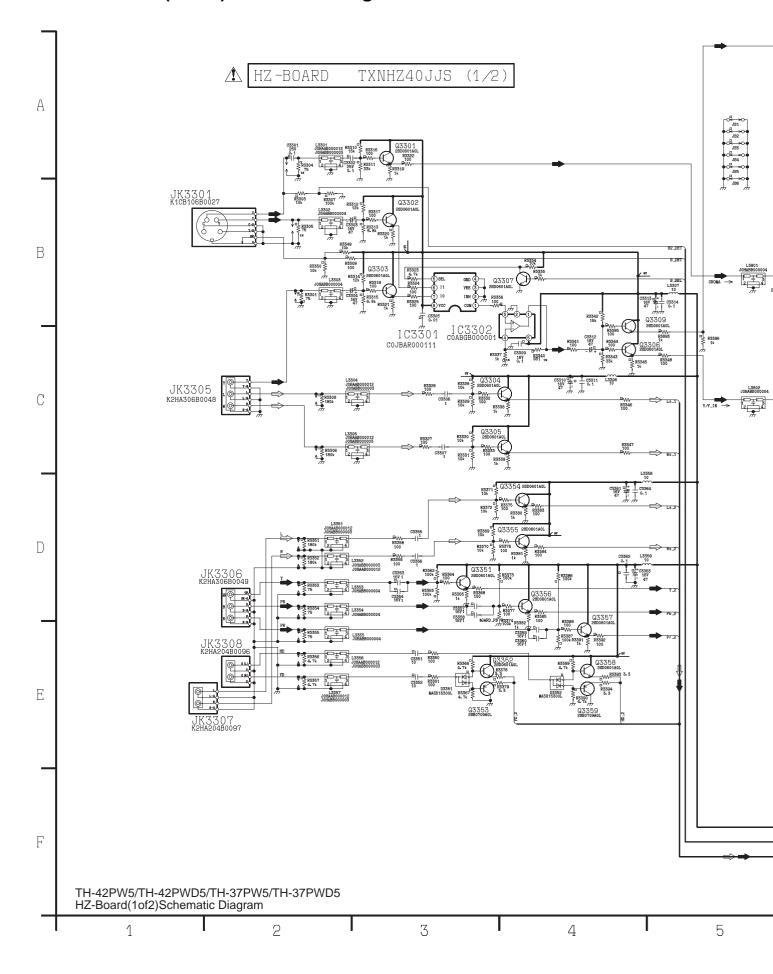




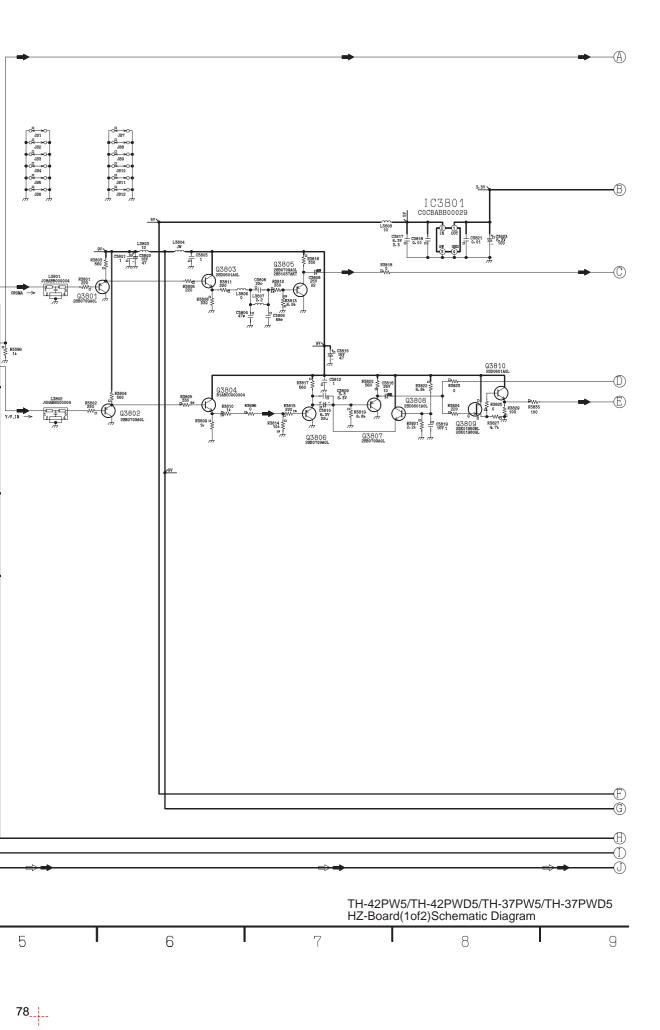

## 14.15. HZ-Board (2 of 2) Schematic Diagram

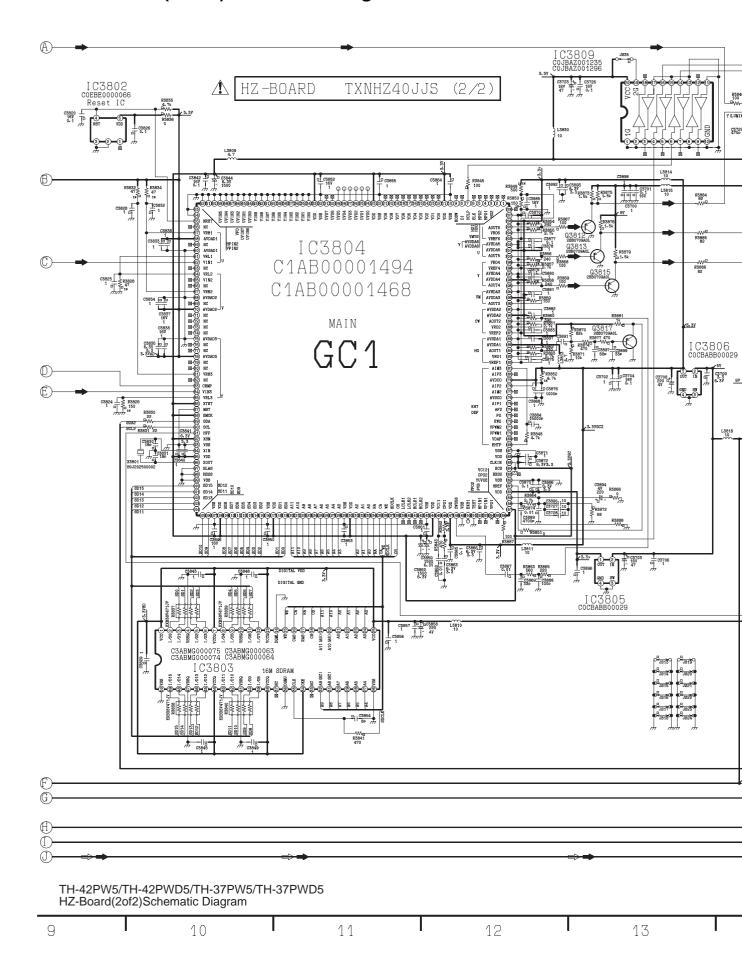




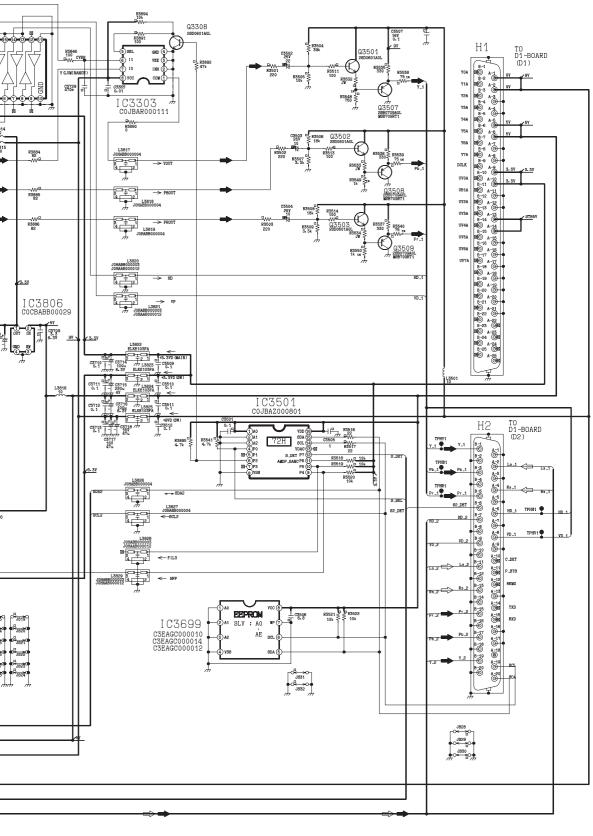




#### ----


#### 14.16. D1-Board Block Diagram

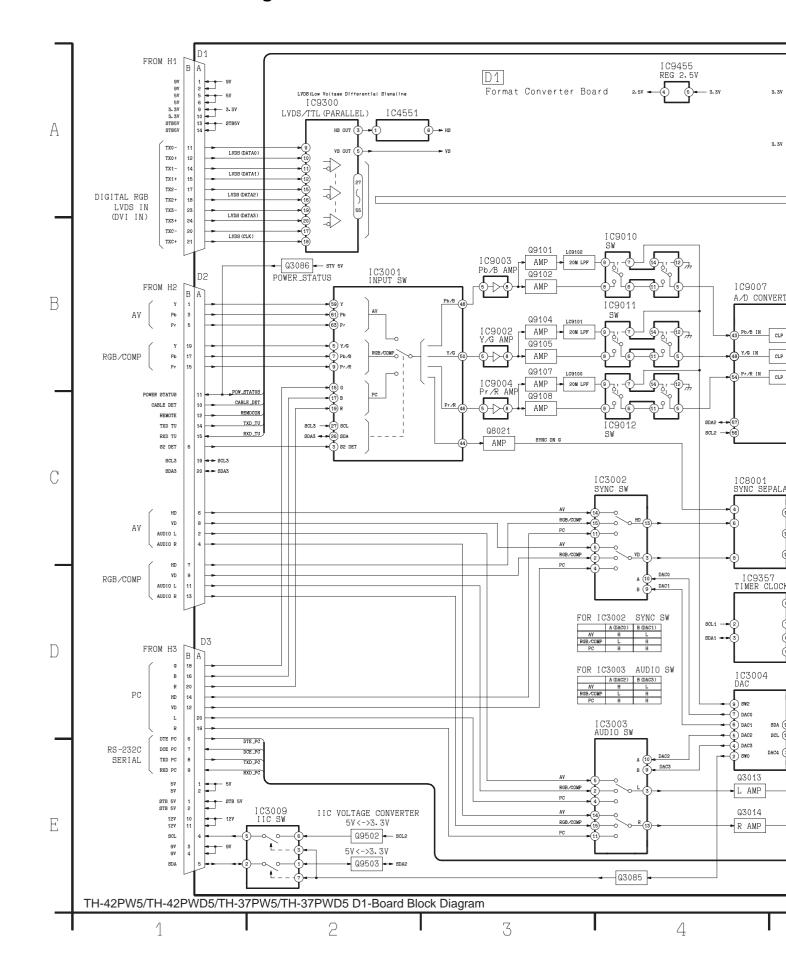




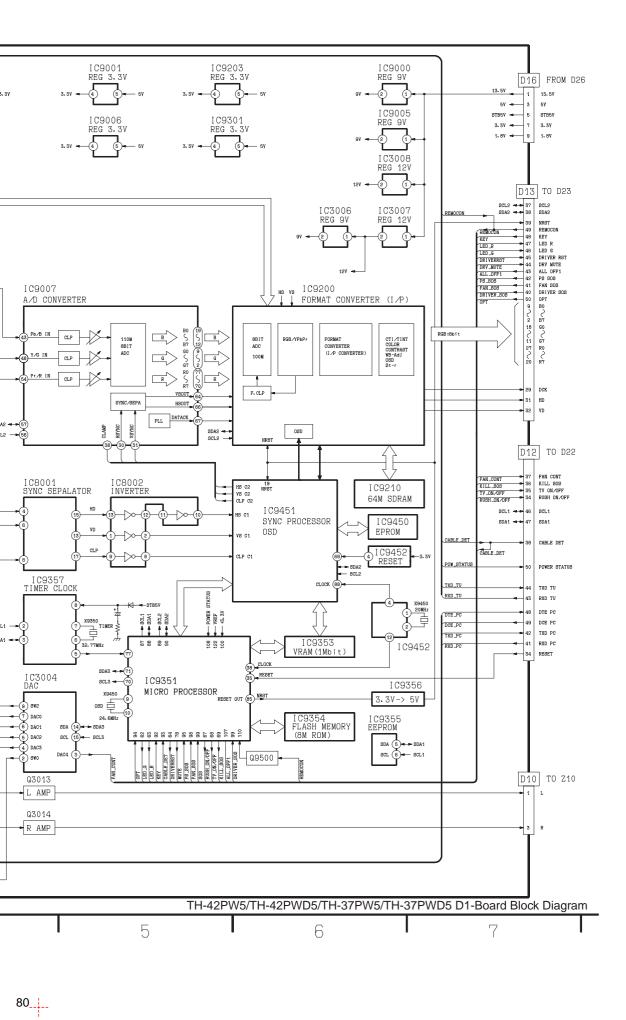


## 14.17. D1-Board (1 of 6) Schematic Diagram

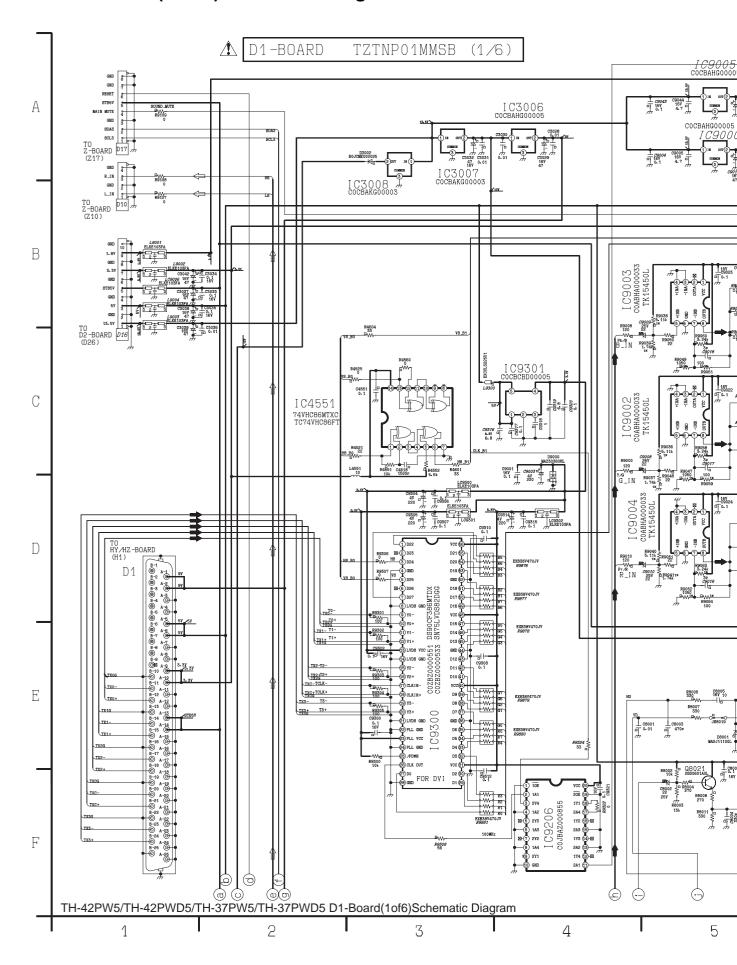




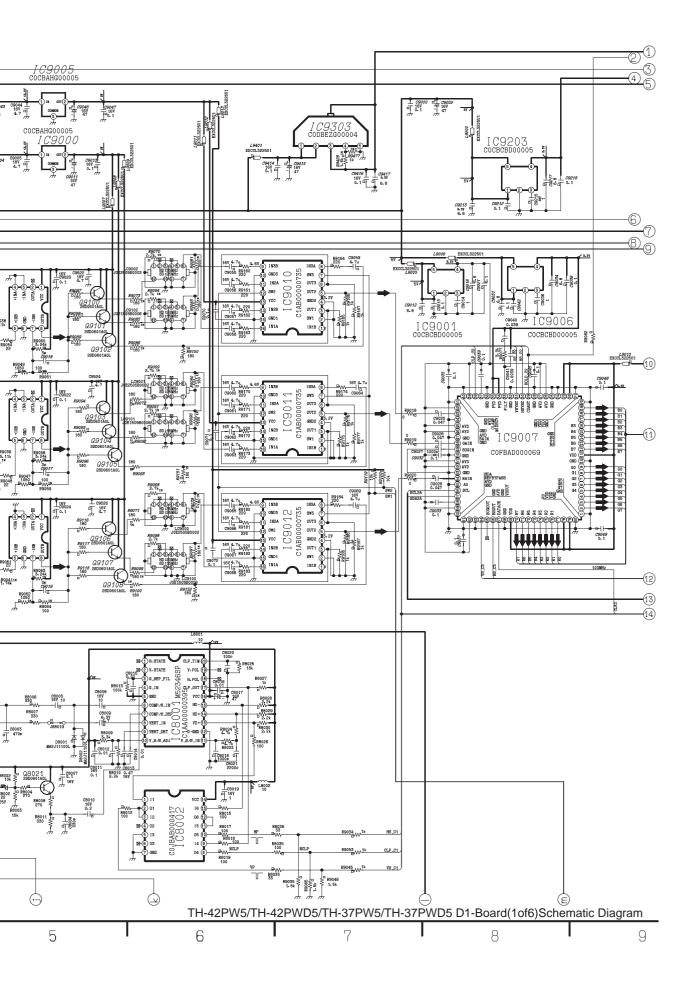


#### 14.18. D1-Board (2 of 6) Schematic Diagram

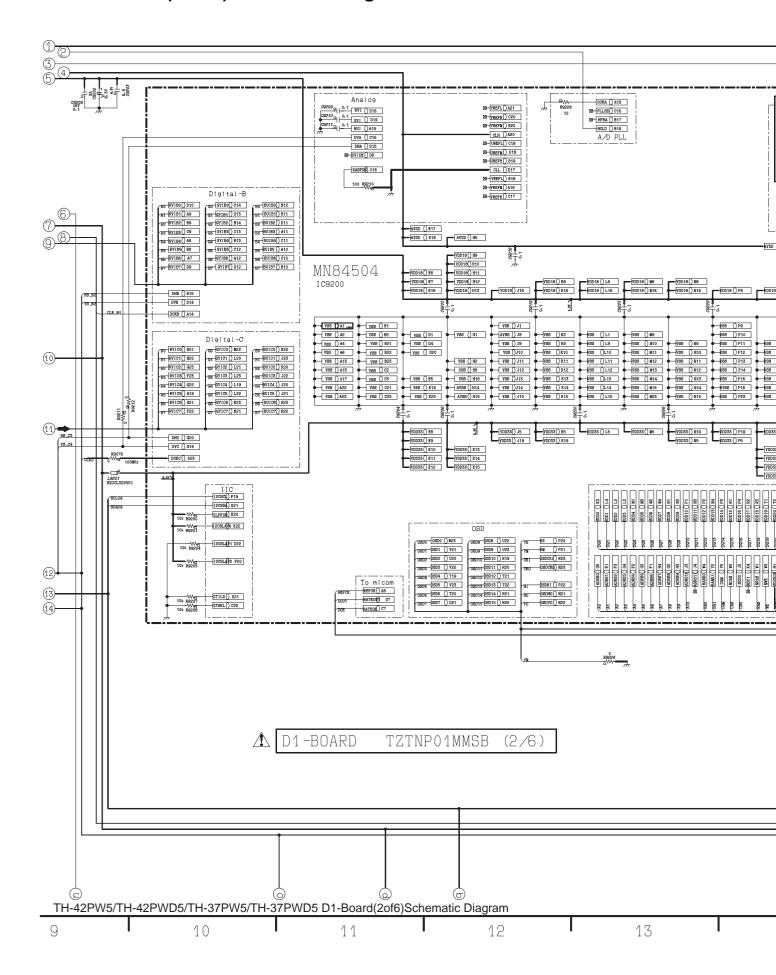


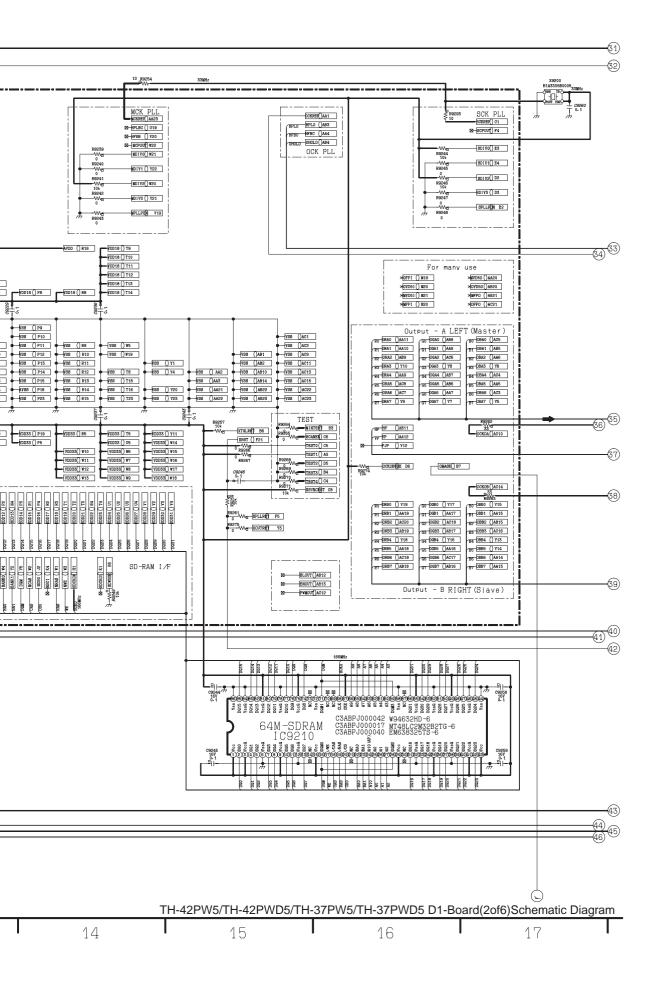

#### ---


## 14.19. D1-Board (3 of 6) Schematic Diagram

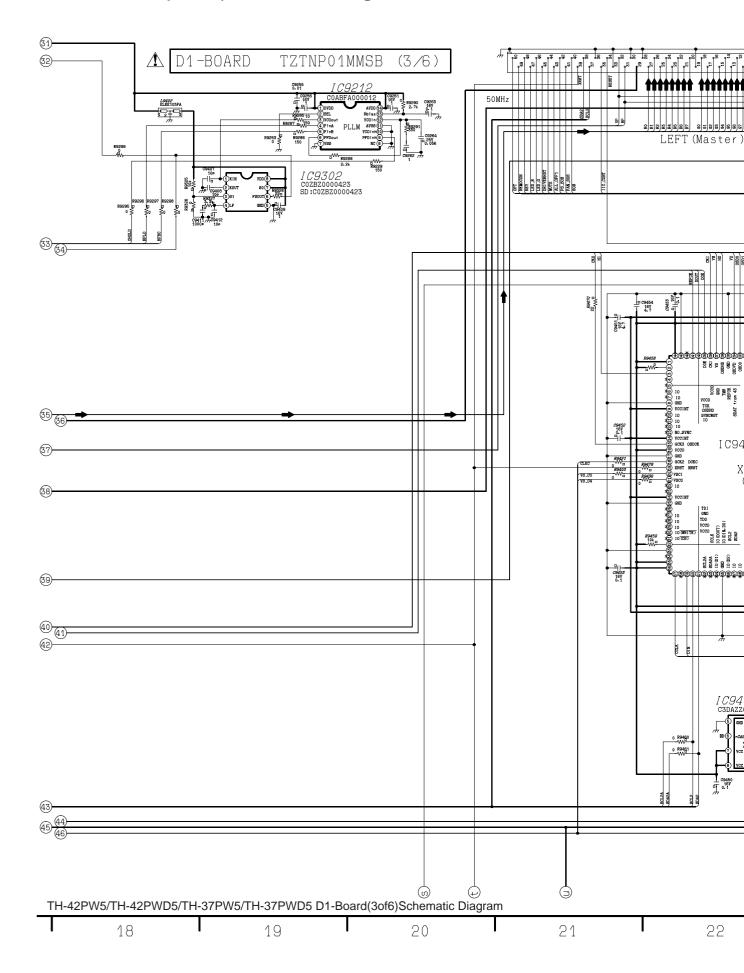

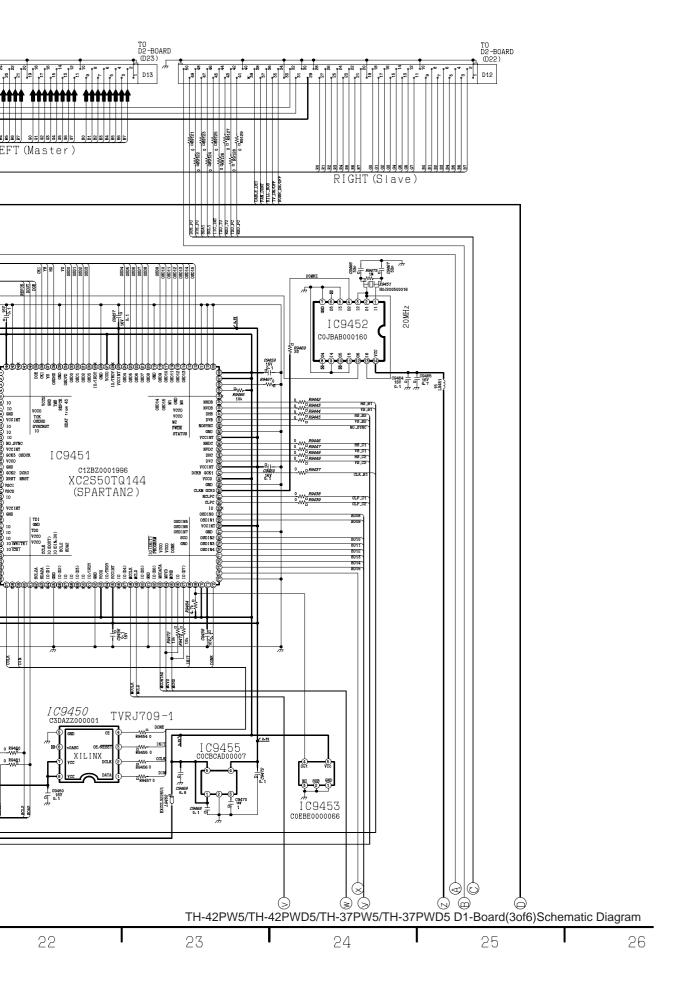


#### ---


## 14.20. D1-Board (4 of 6) Schematic Diagram

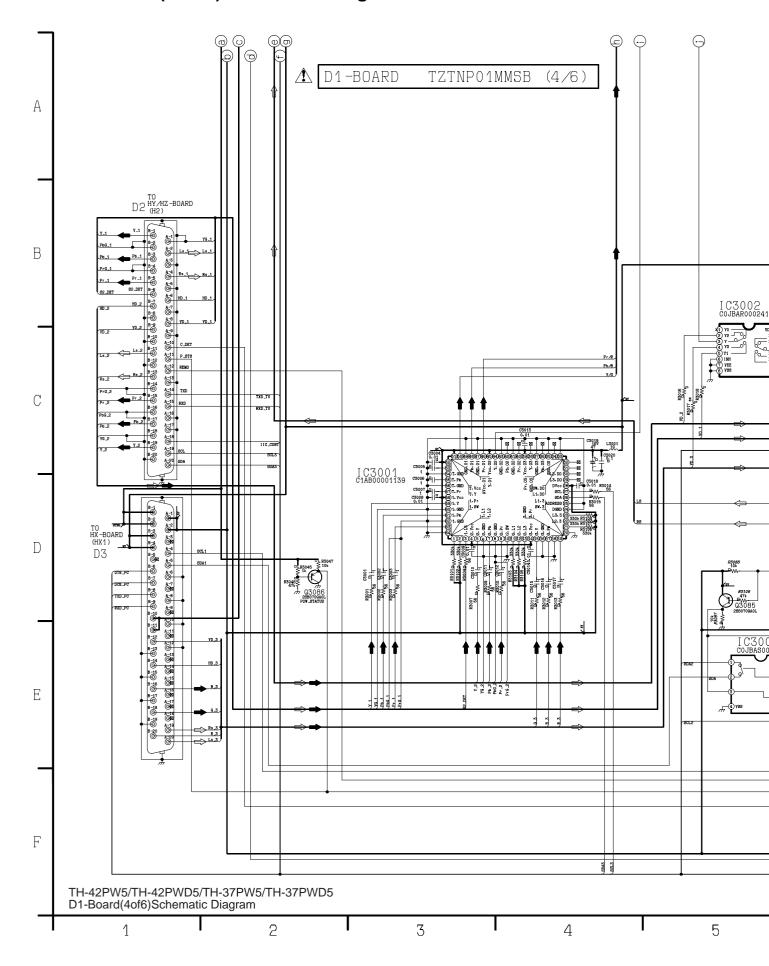




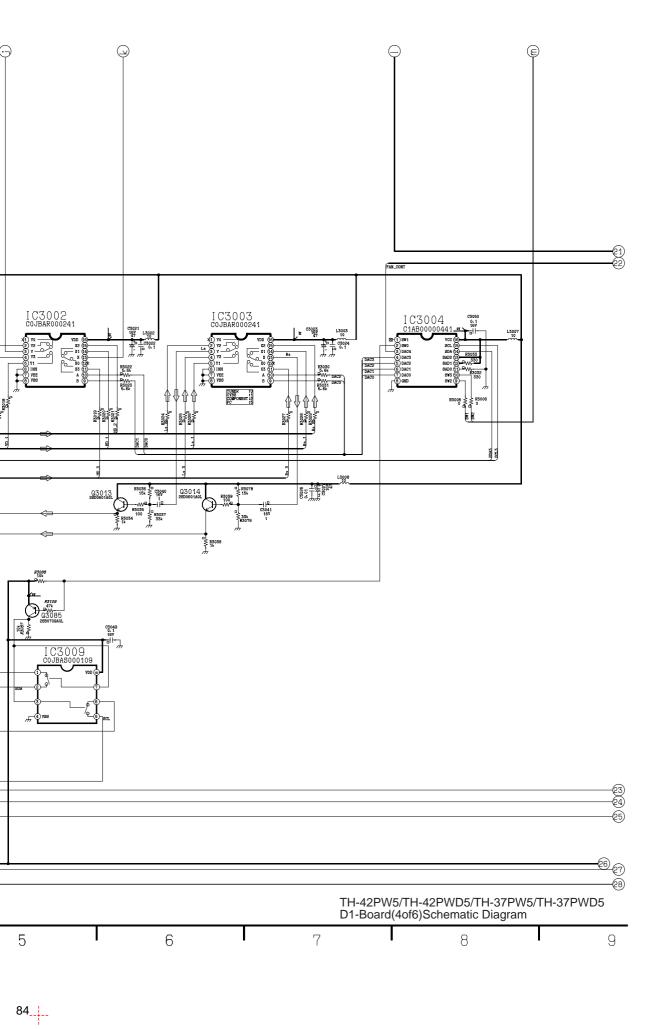

# 14.21. D1-Board (5 of 6) Schematic Diagram

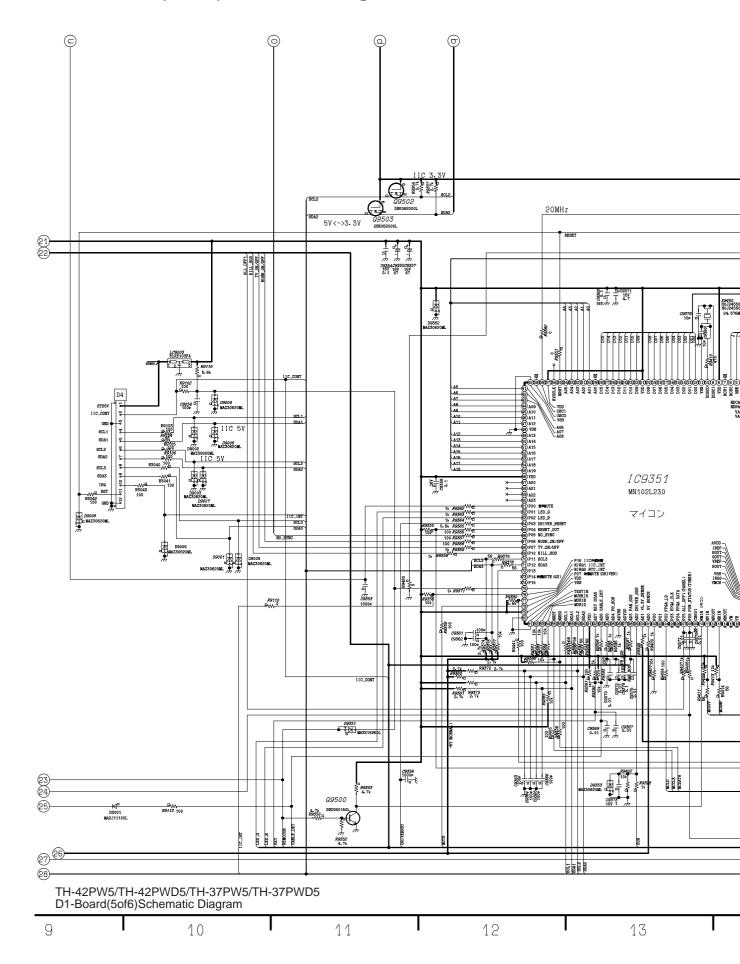




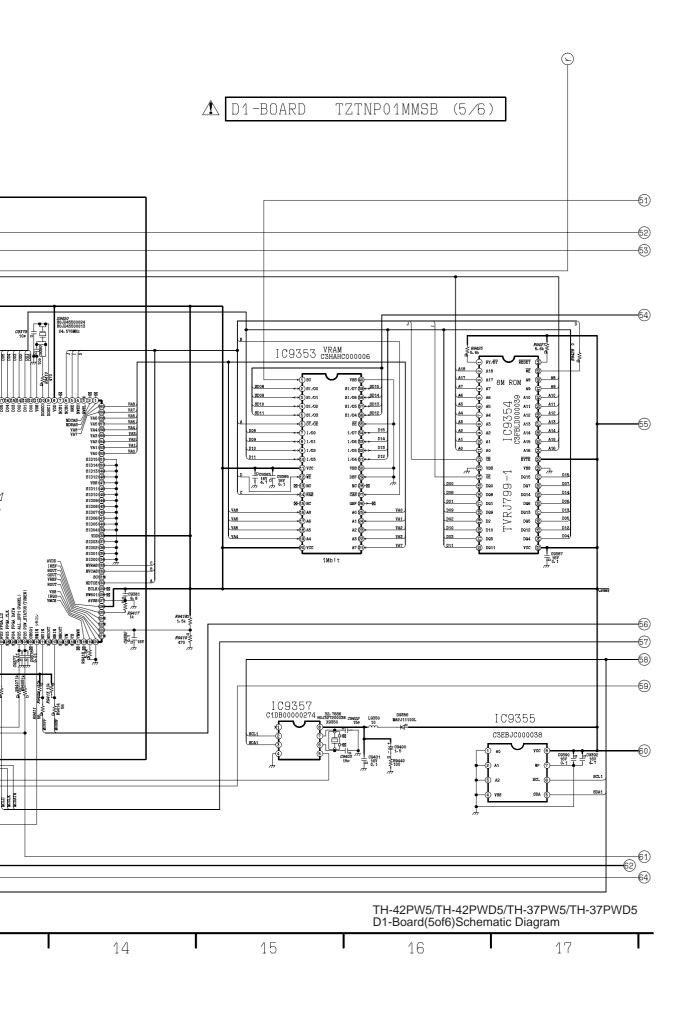


#### ---

# 14.22. D1-Board (6 of 6) Schematic Diagram

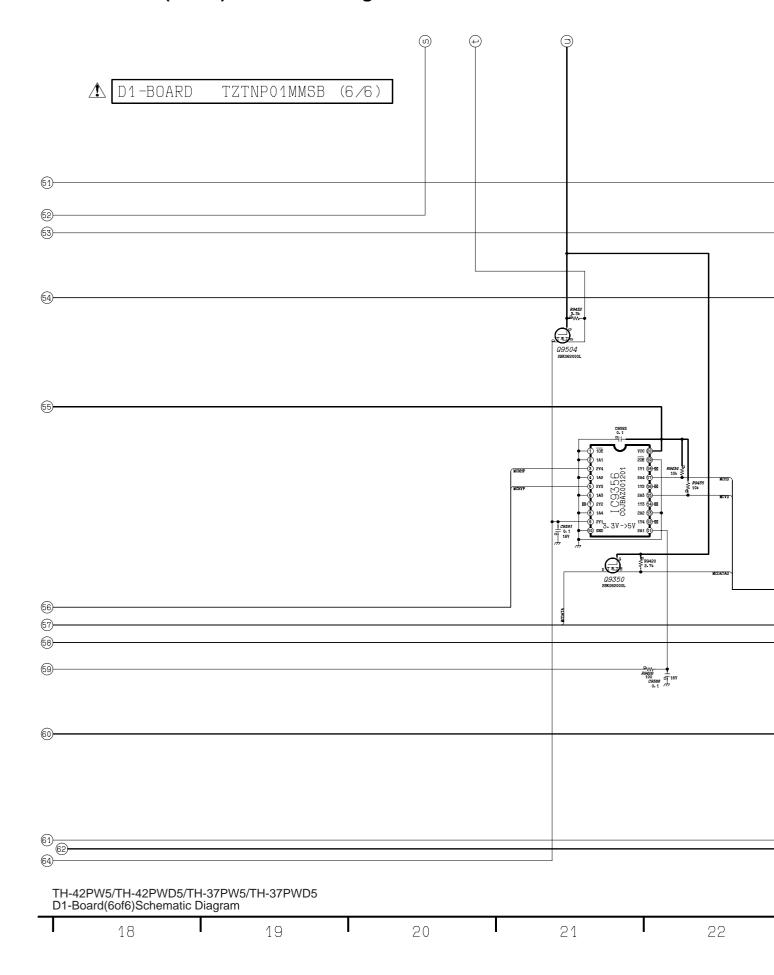




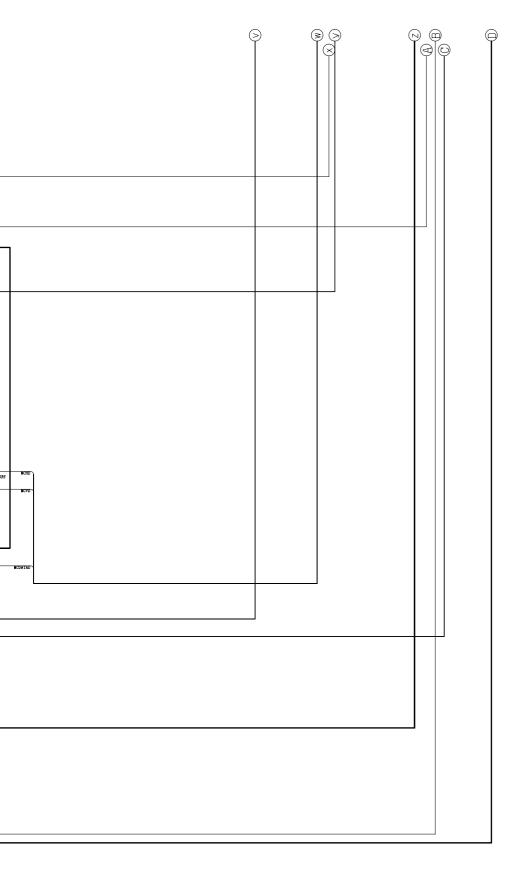





## 14.23. D2-Board Block Diagram

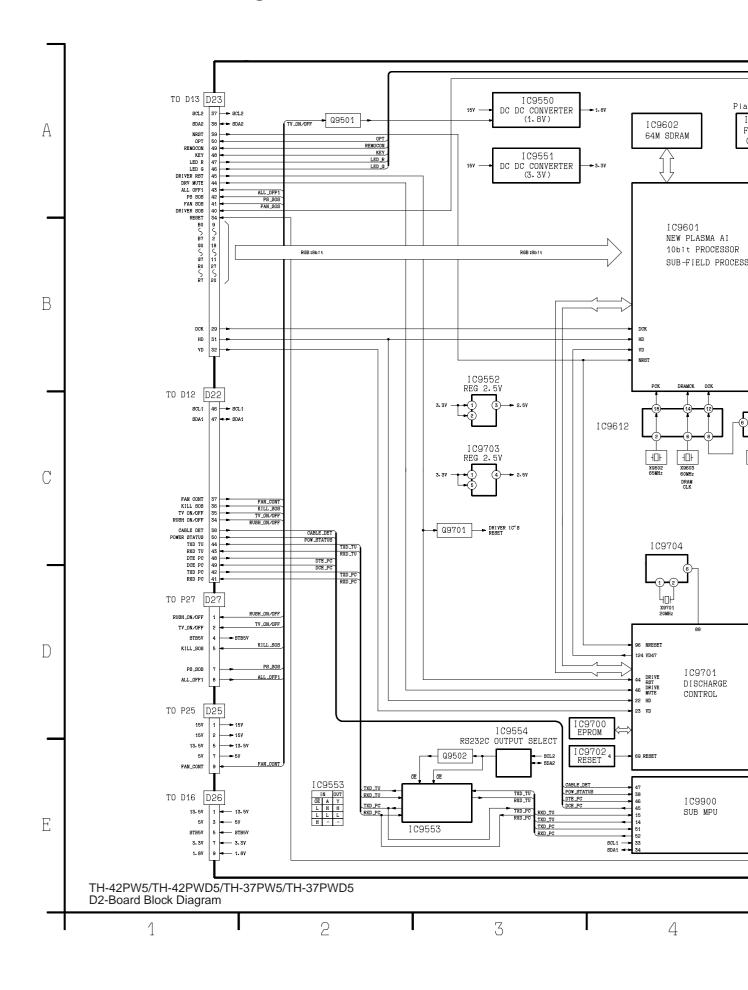




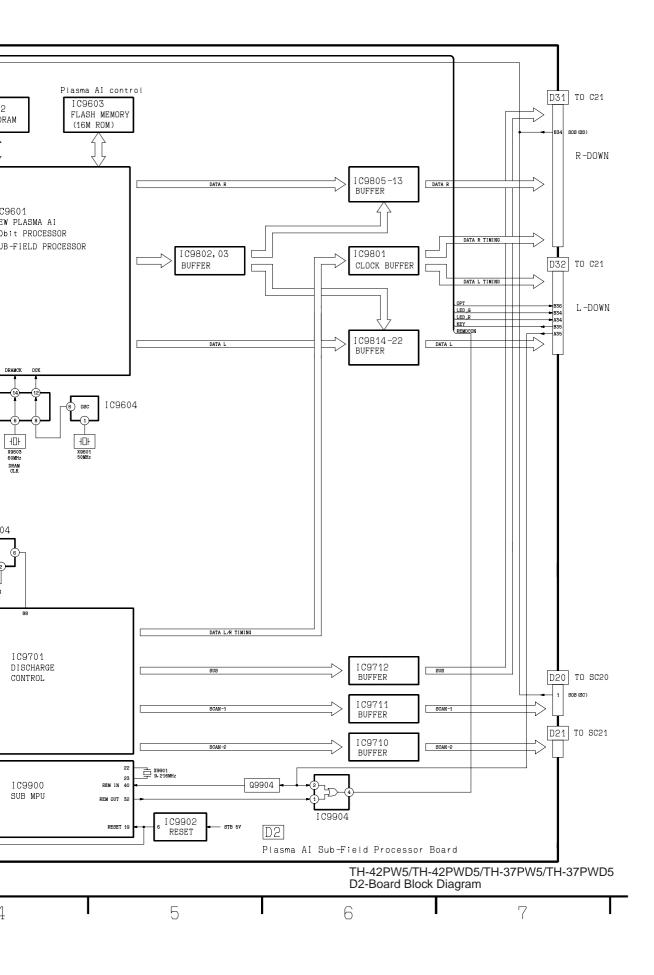


## 14.24. D2-Board (1 of 6) Schematic Diagram

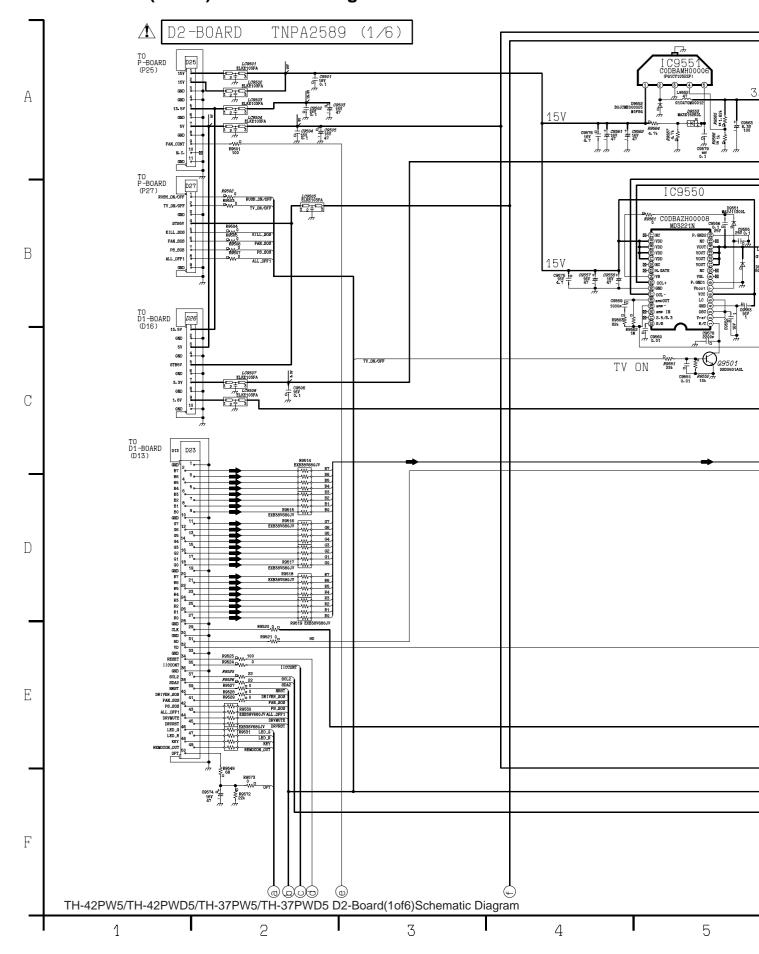


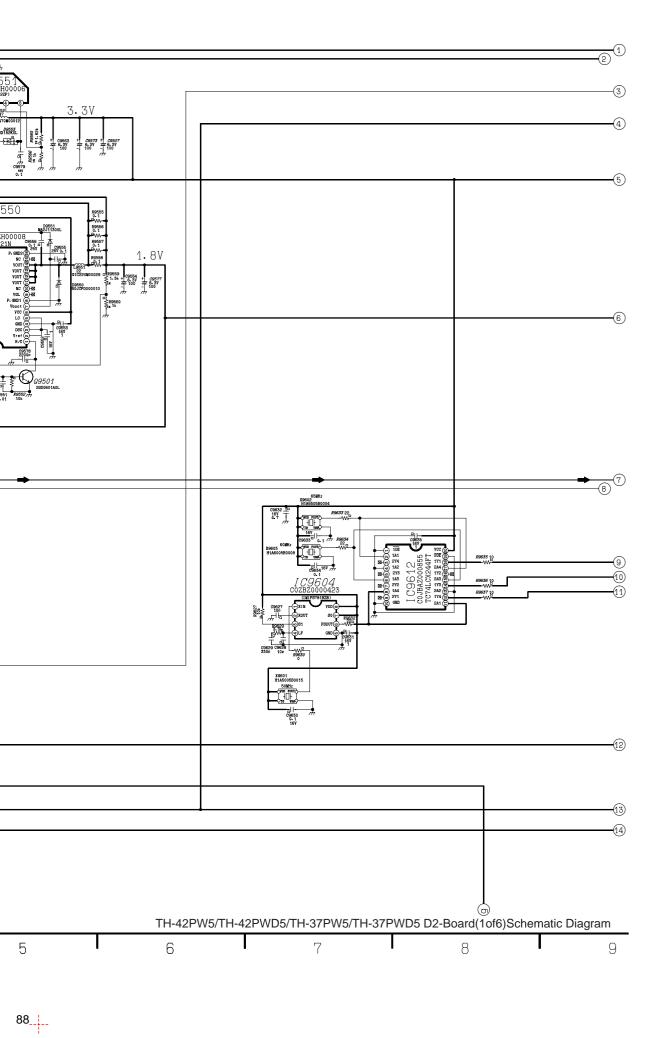


### 14.25. D2-Board (2 of 6) Schematic Diagram

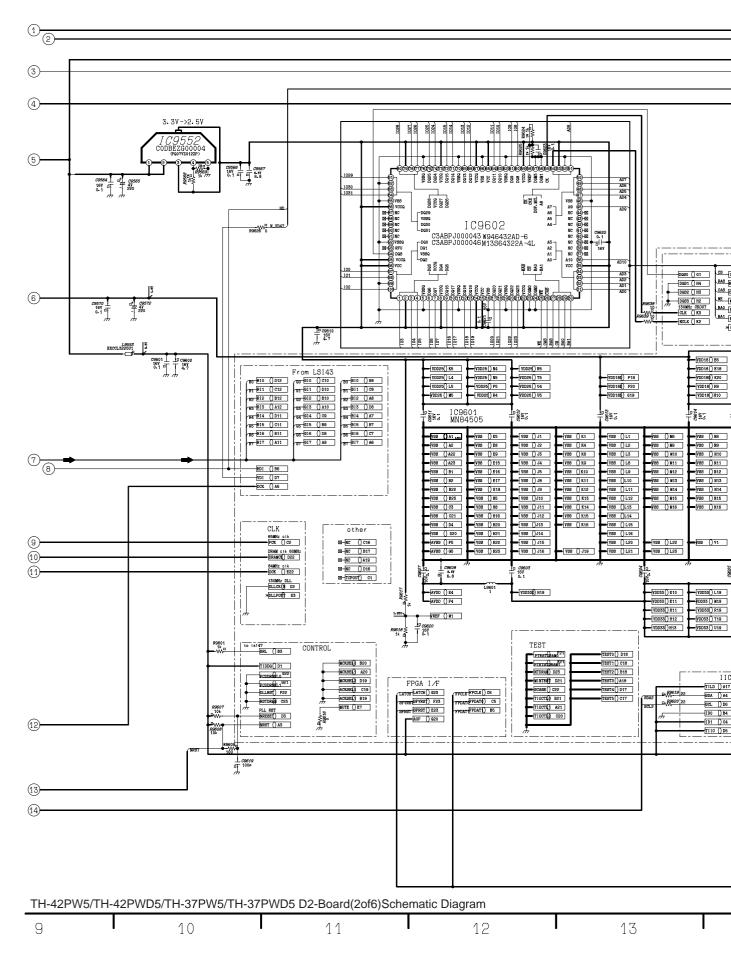




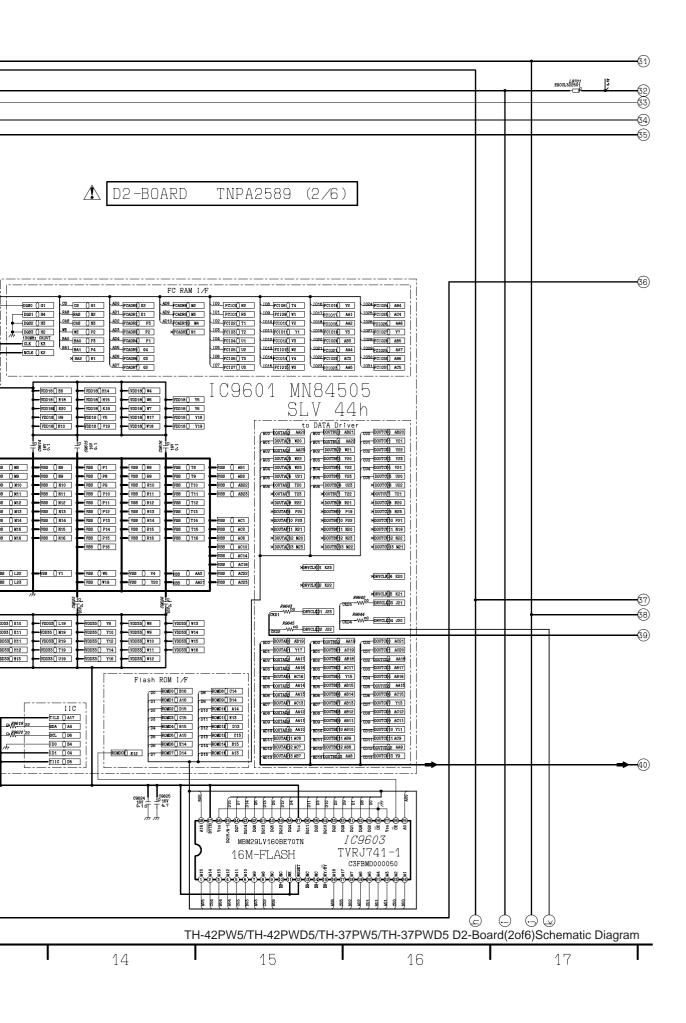


## 14.26. D2-Board (3 of 6) Schematic Diagram

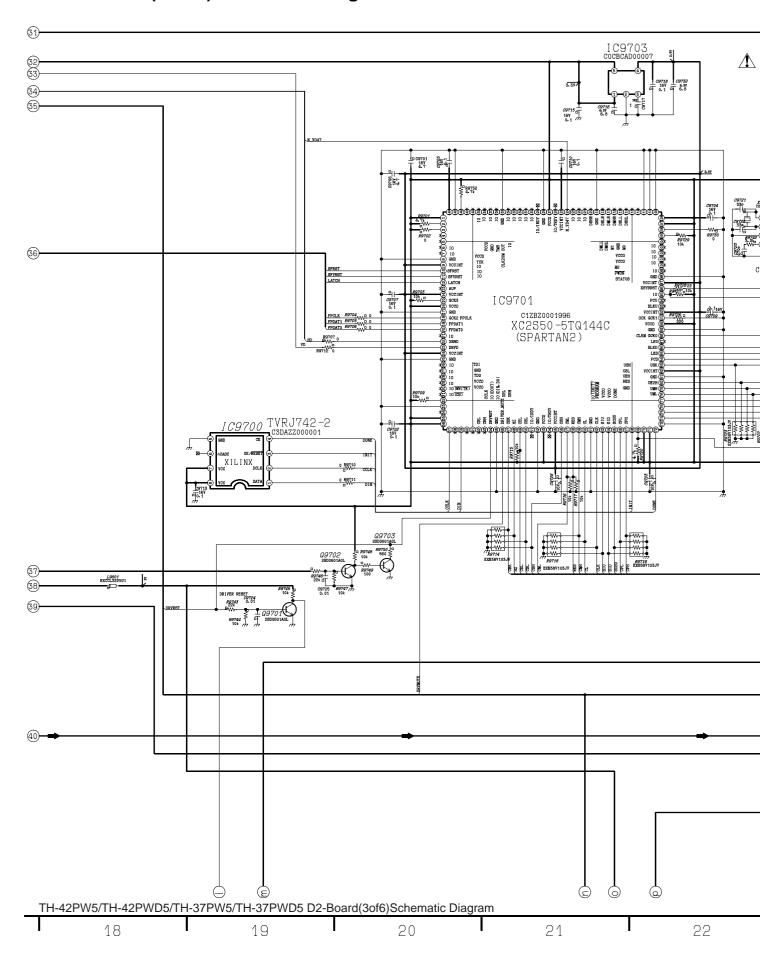




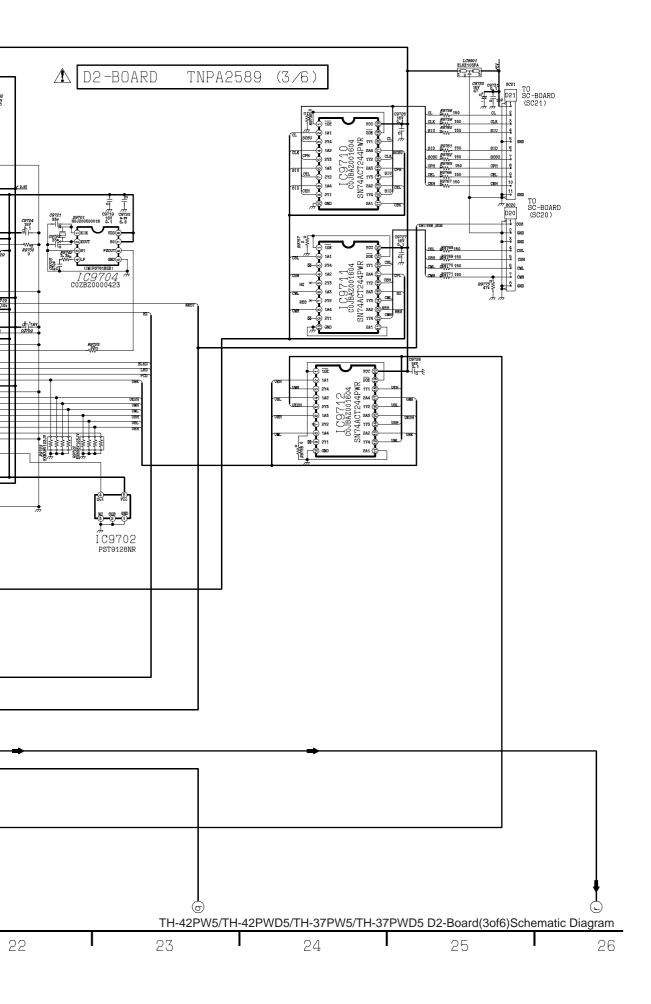

# 14.27. D2-Board (4 of 6) Schematic Diagram

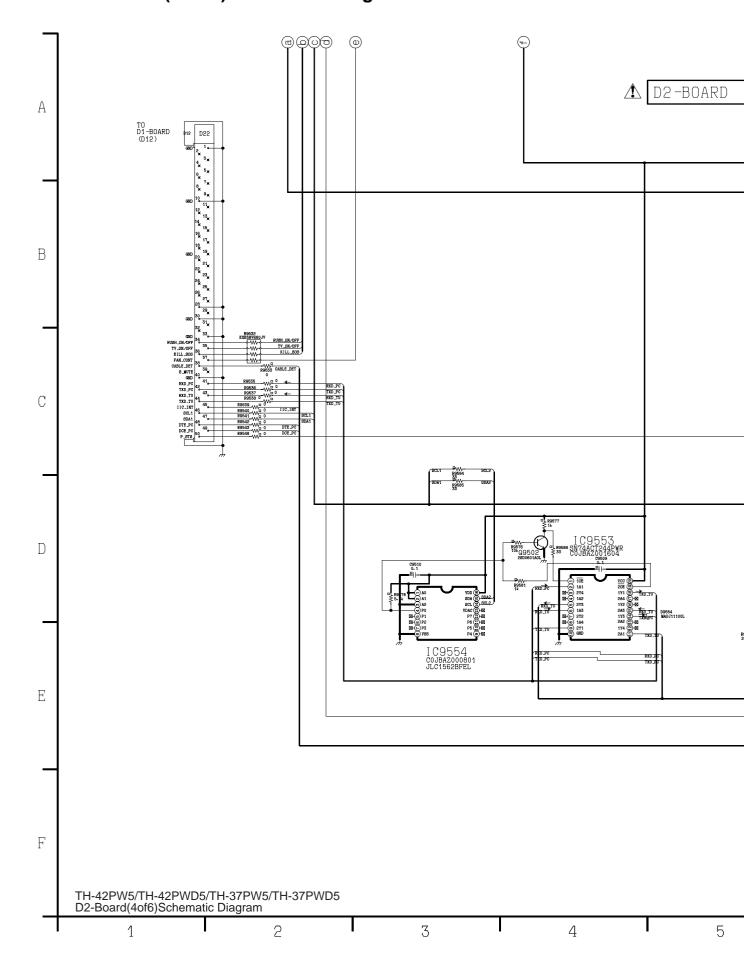



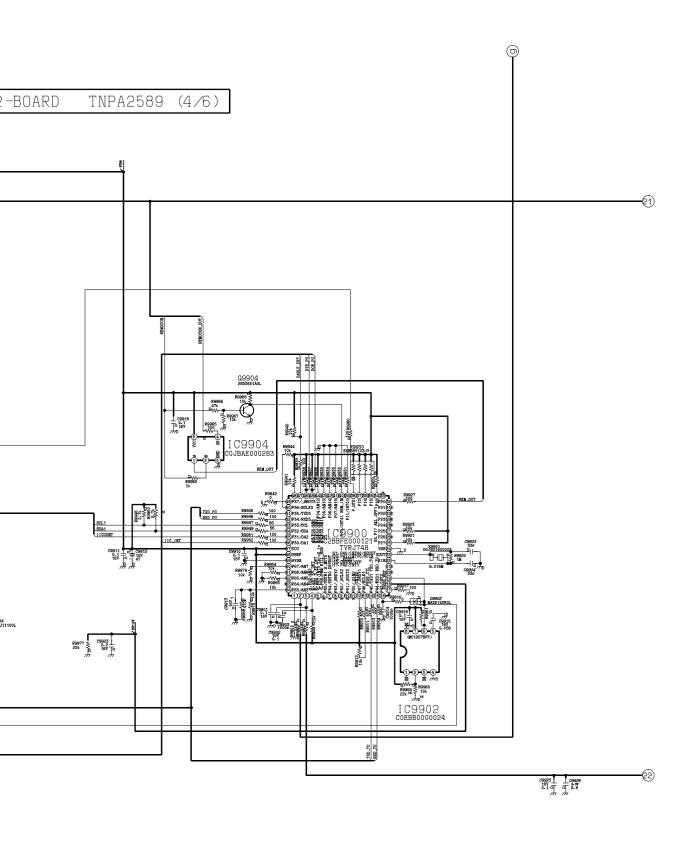





# 14.28. D2-Board (5 of 6) Schematic Diagram

⚠ D2-BOARD TNPA2589 (5/6)


@1)-


(2)

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 D2-Board(5of6)Schematic Diagram


9 1 10 11 12 1 13



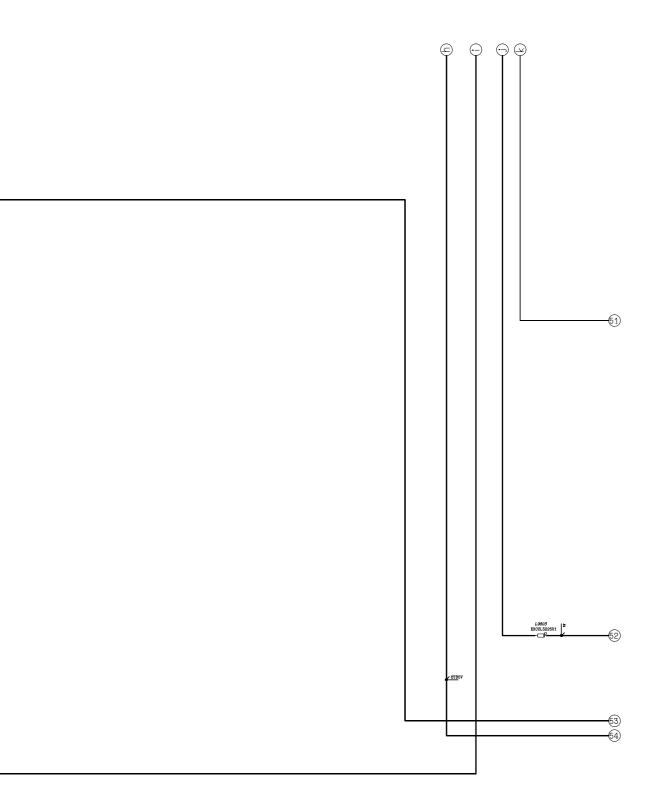





# 14.29. D2-Board (6 of 6) Schematic Diagram

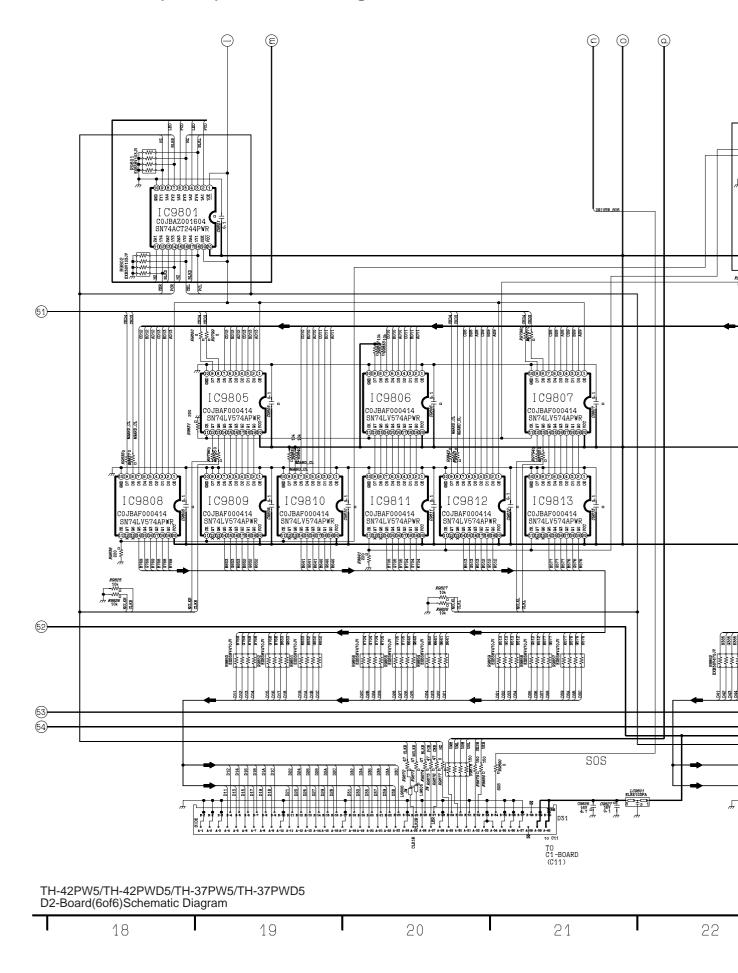




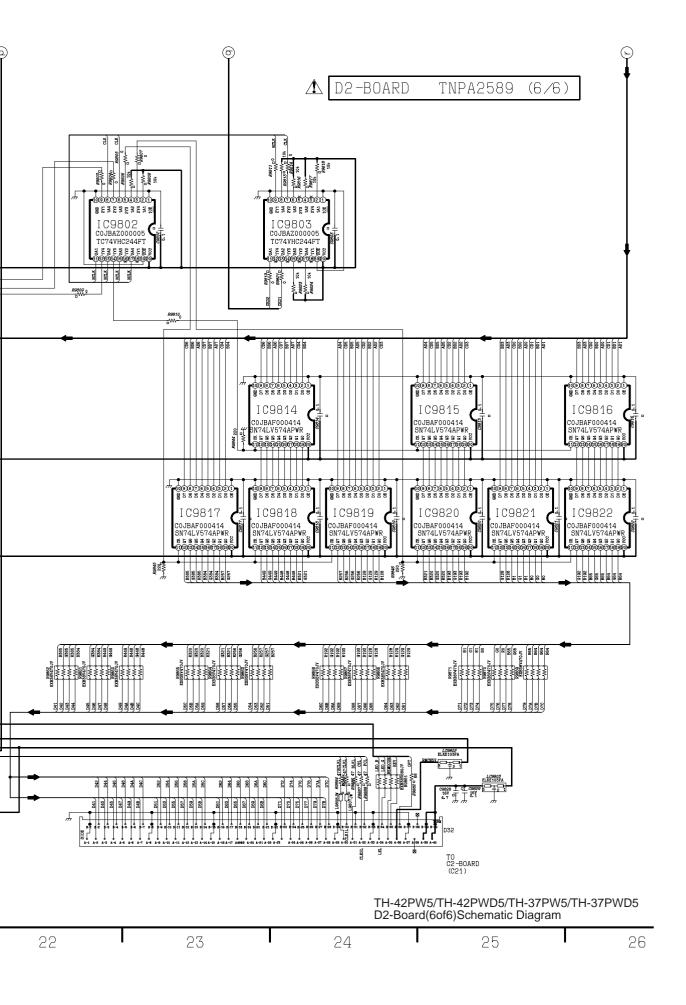


# 14.30. C1 and C2-Board Block Diagram

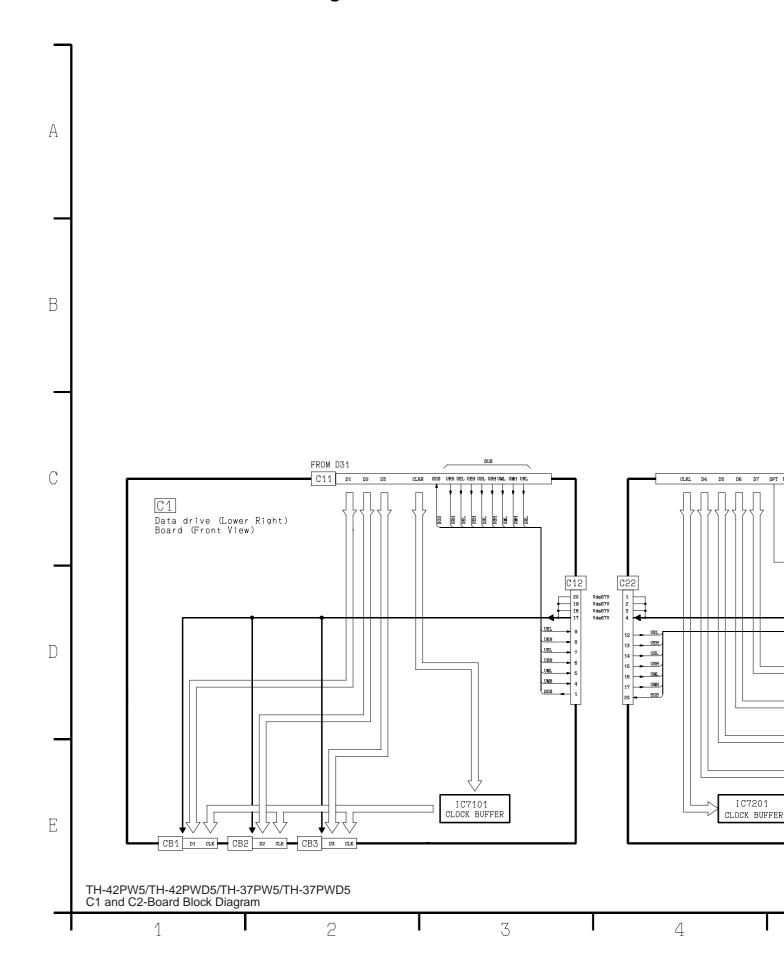




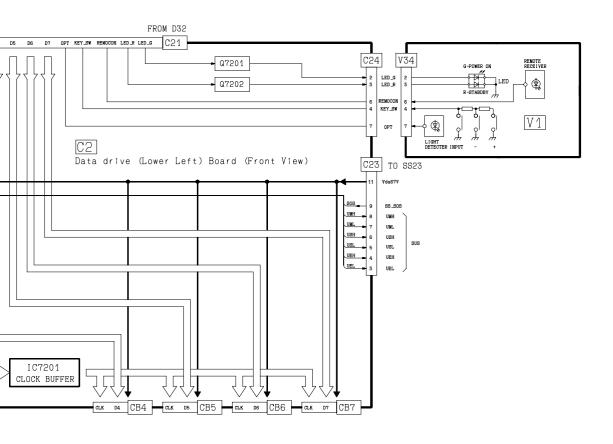

# 14.31. C1-Board (42 inch Models) Schematic Diagram

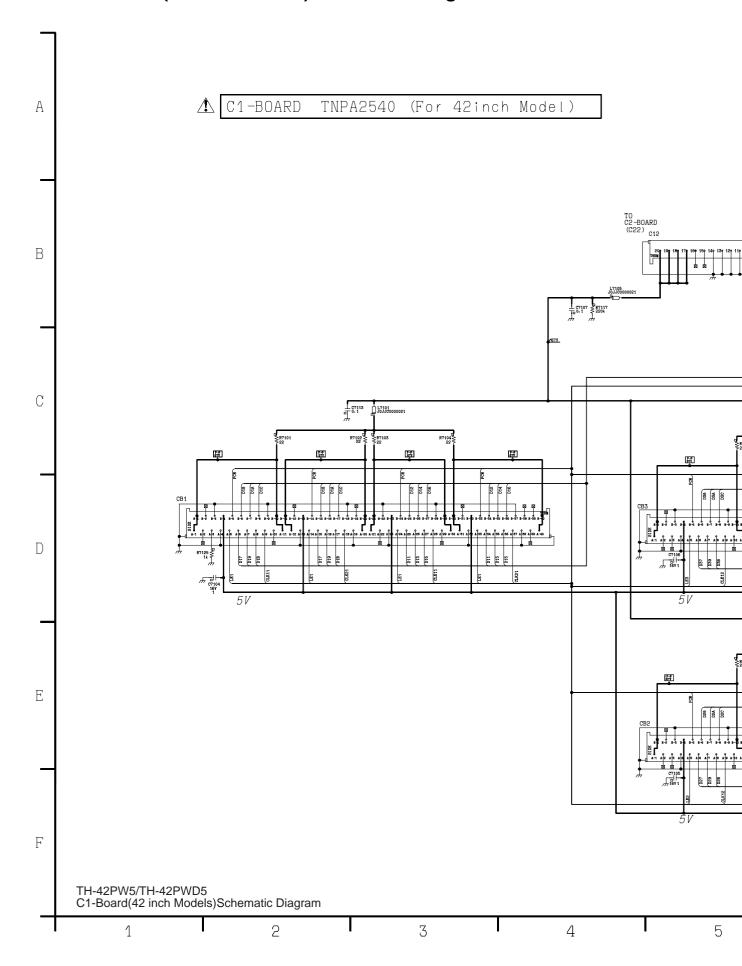




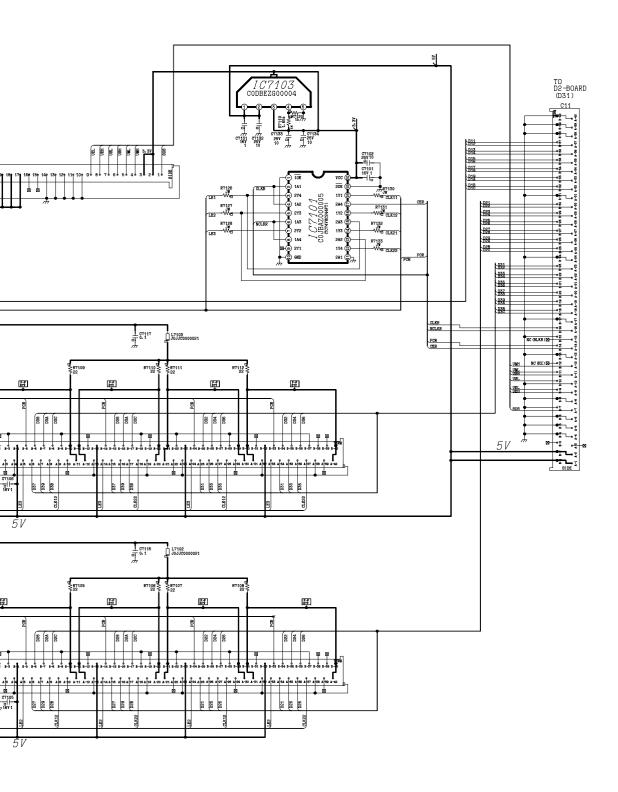





# 14.32. C1-Board (37 inch Models) Schematic Diagram

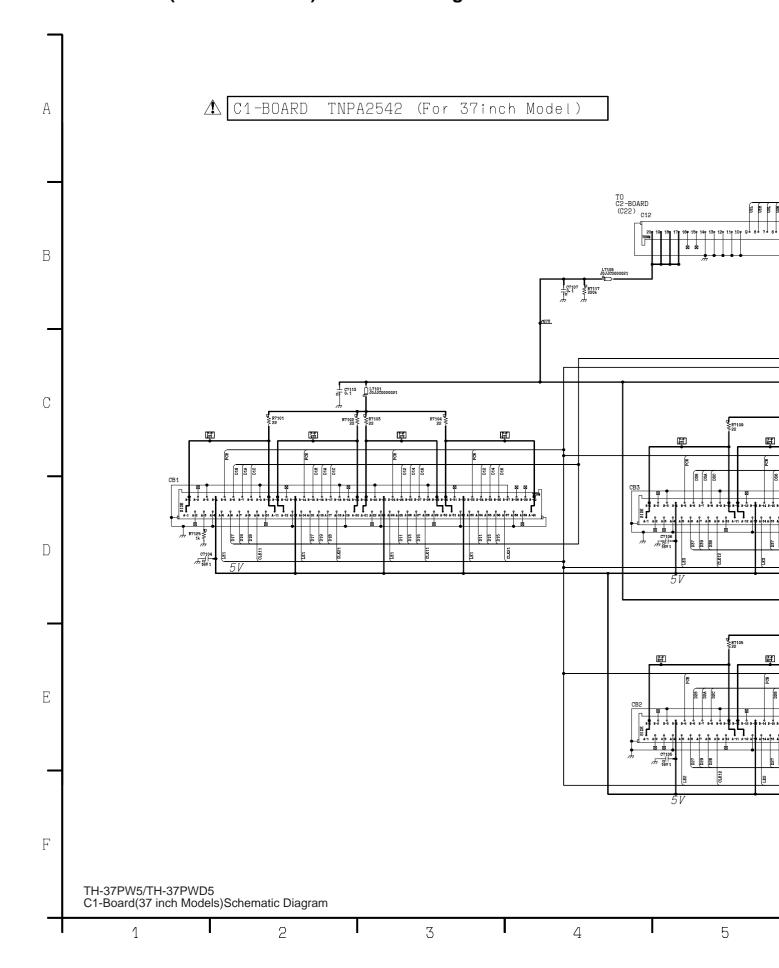




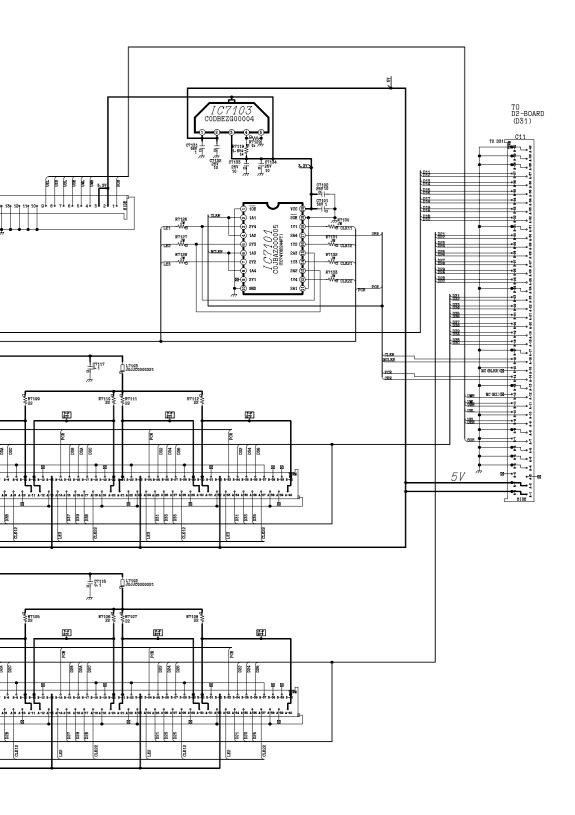





## 14.33. C2-Board (42 inch Models) Schematic Diagram

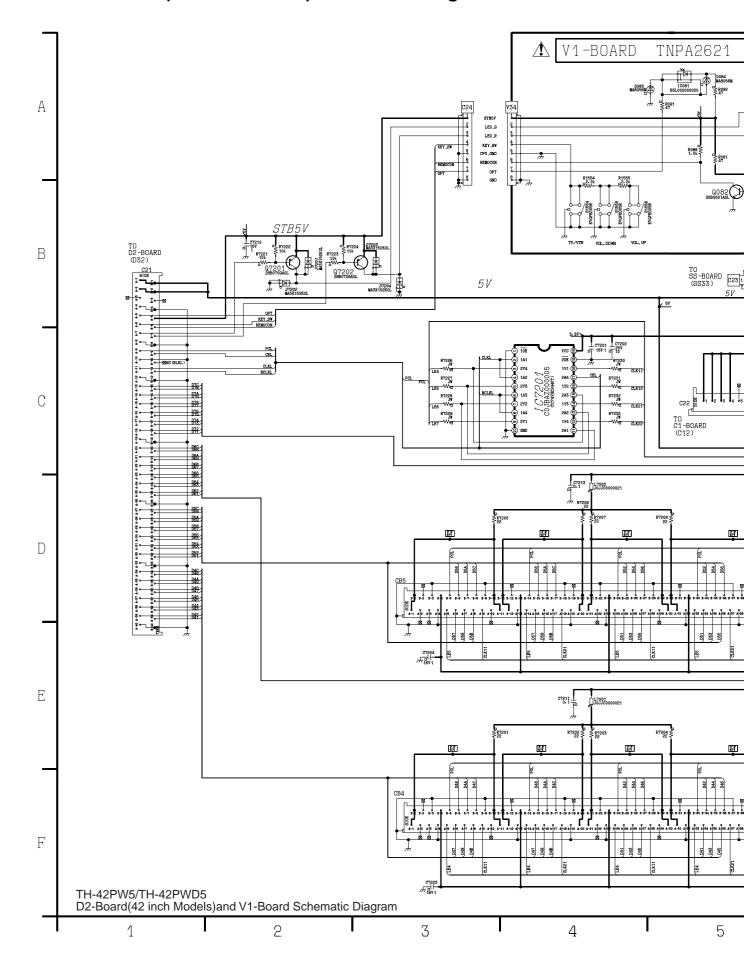




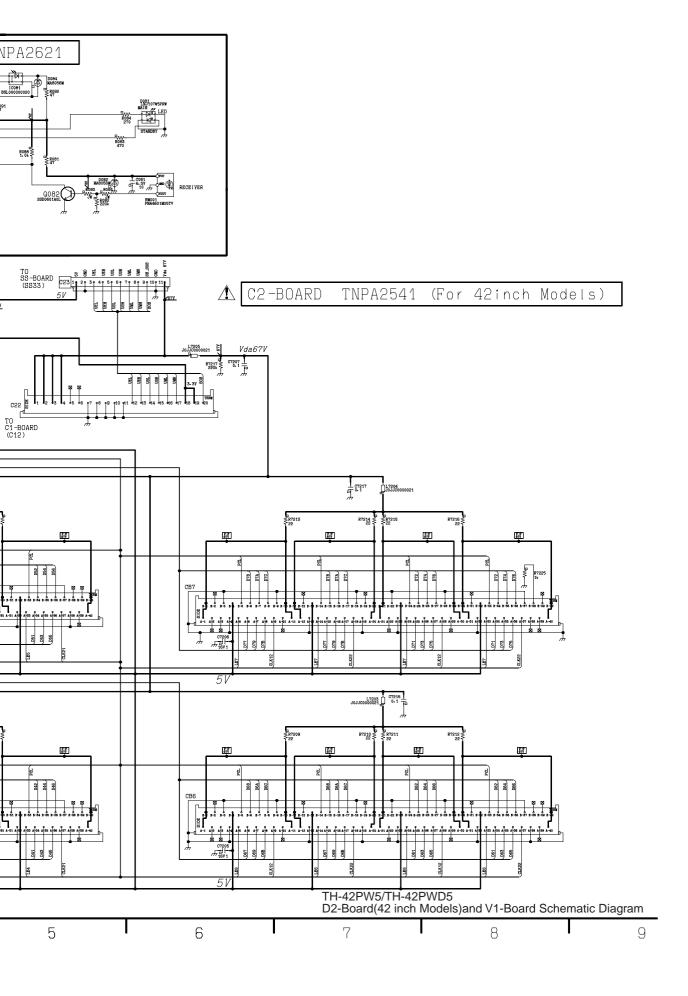


## 14.34. C2-Board (37 inch Models) Schematic Diagram

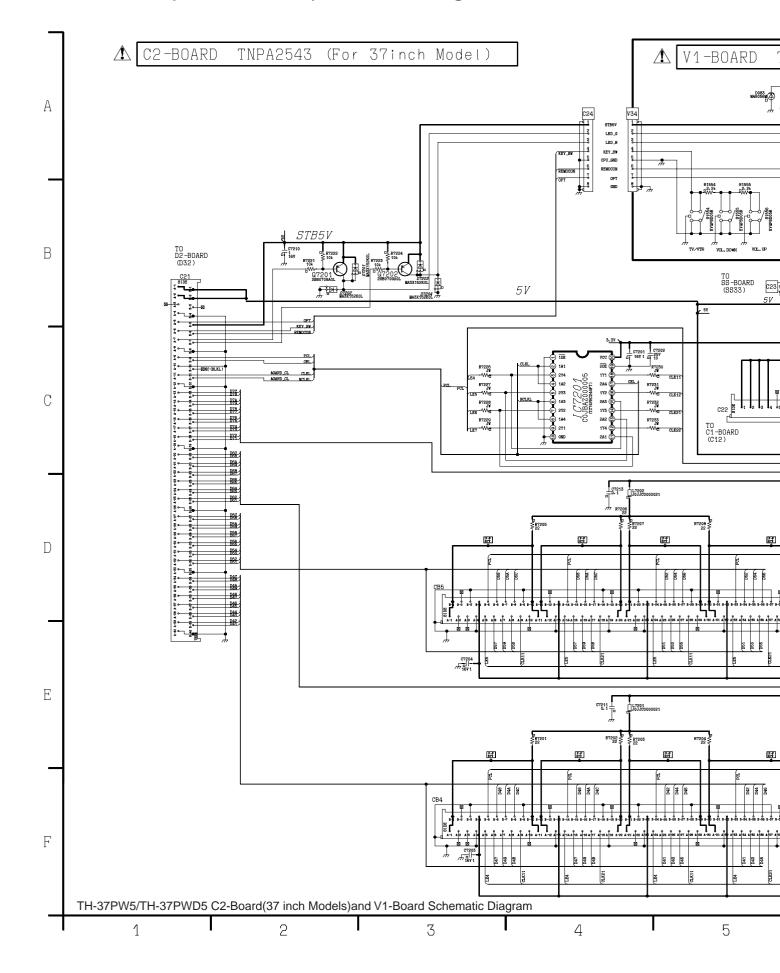


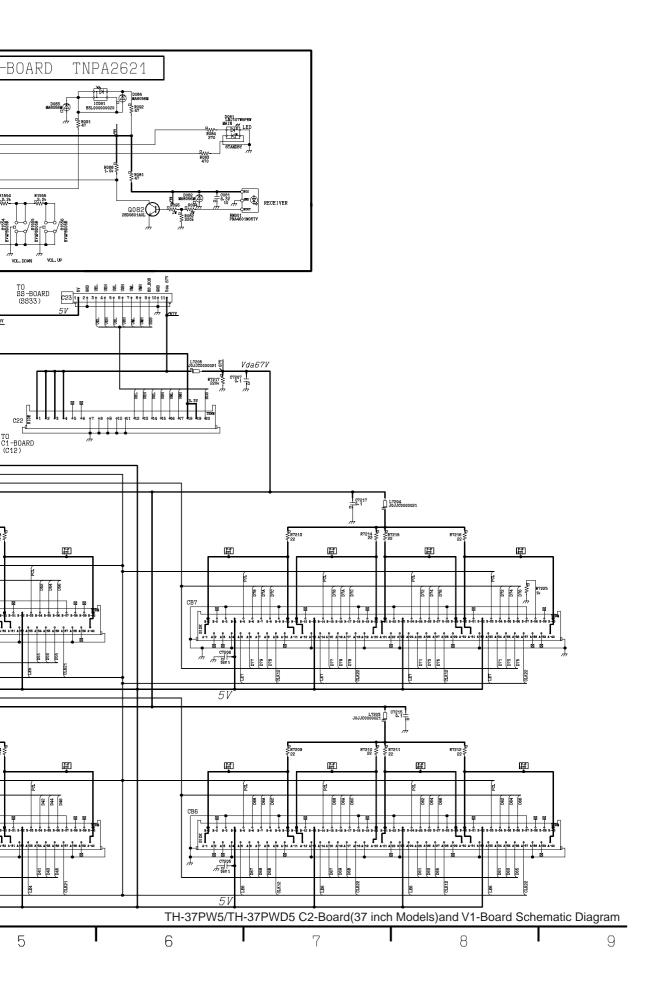


## 14.35. SC-Board Block Diagram

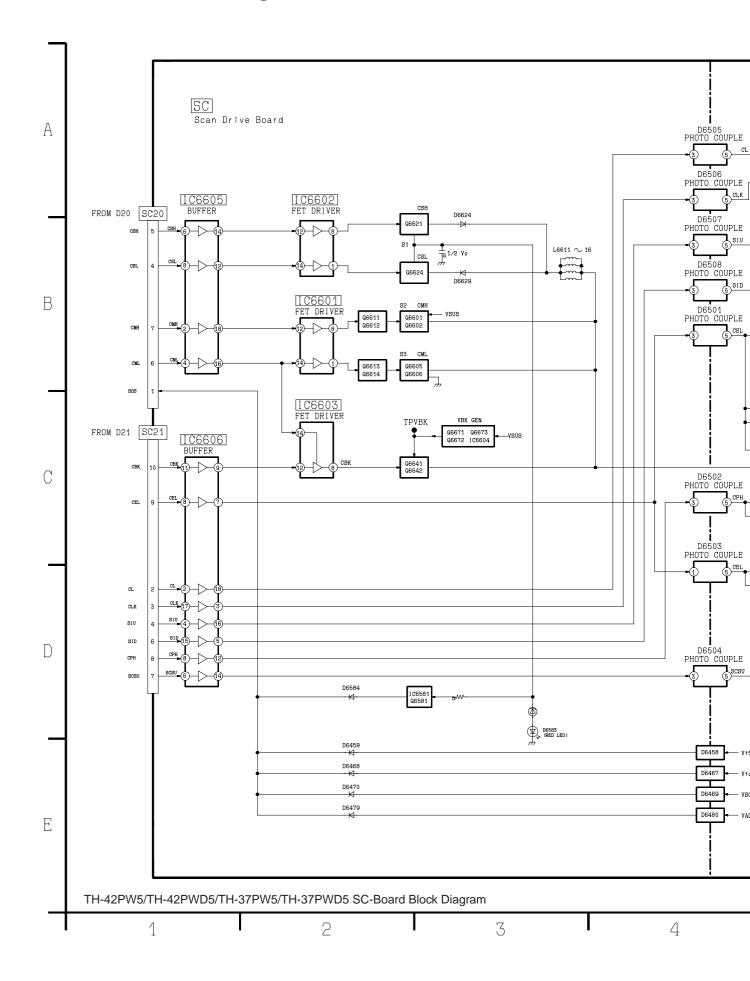




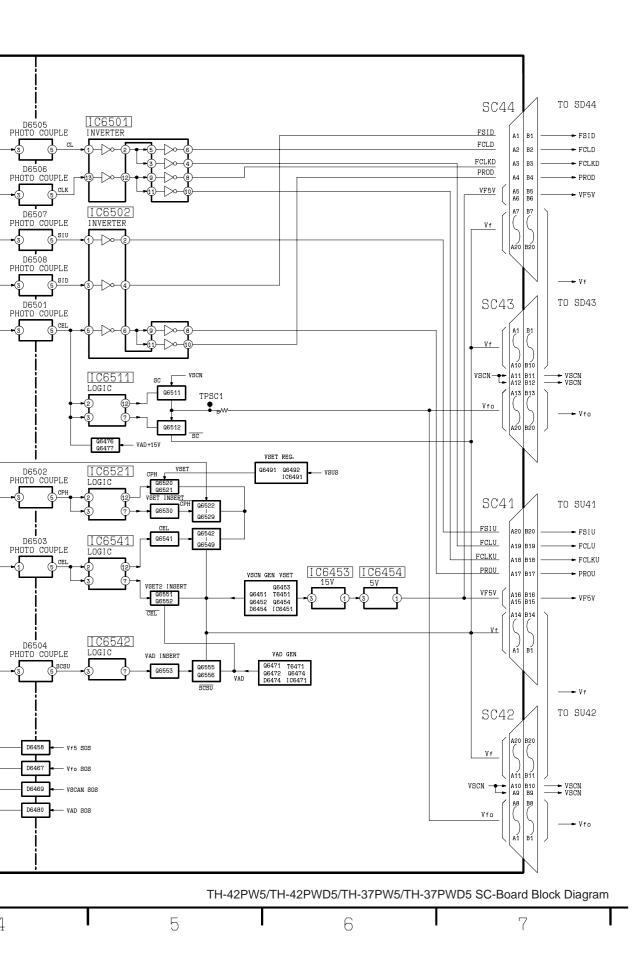


## 14.36. SC-Board (1 of 2) Schematic Diagram

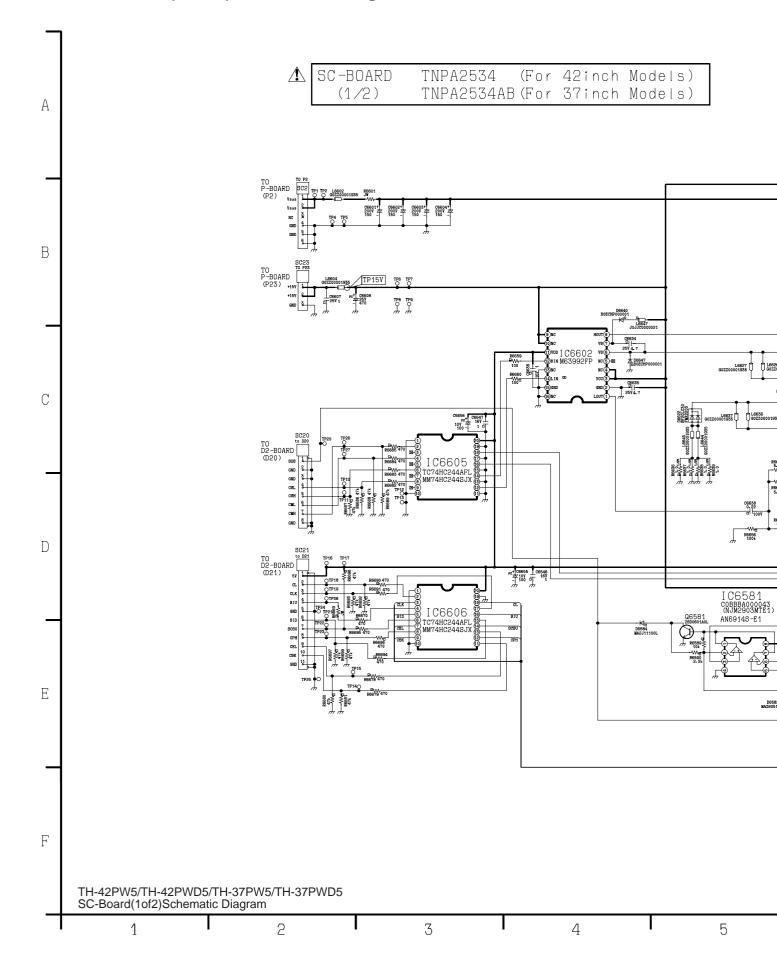

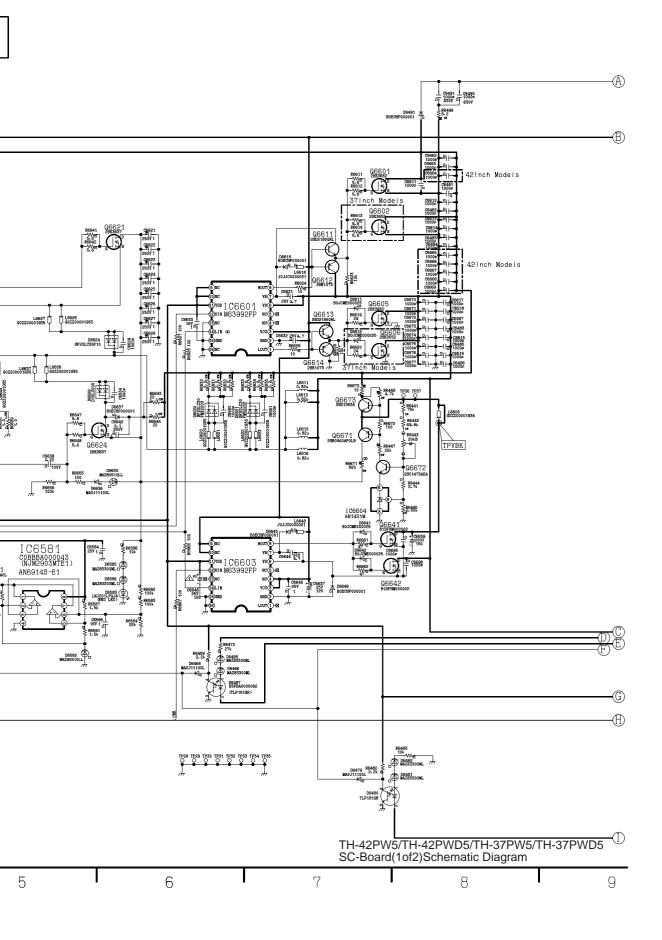



## 14.37. SC-Board (2 of 2) Schematic Diagram

SC-BOARD TNPA2534 (For 42inch Models) (2/2) TNPA2534AB (For 37inch Models)

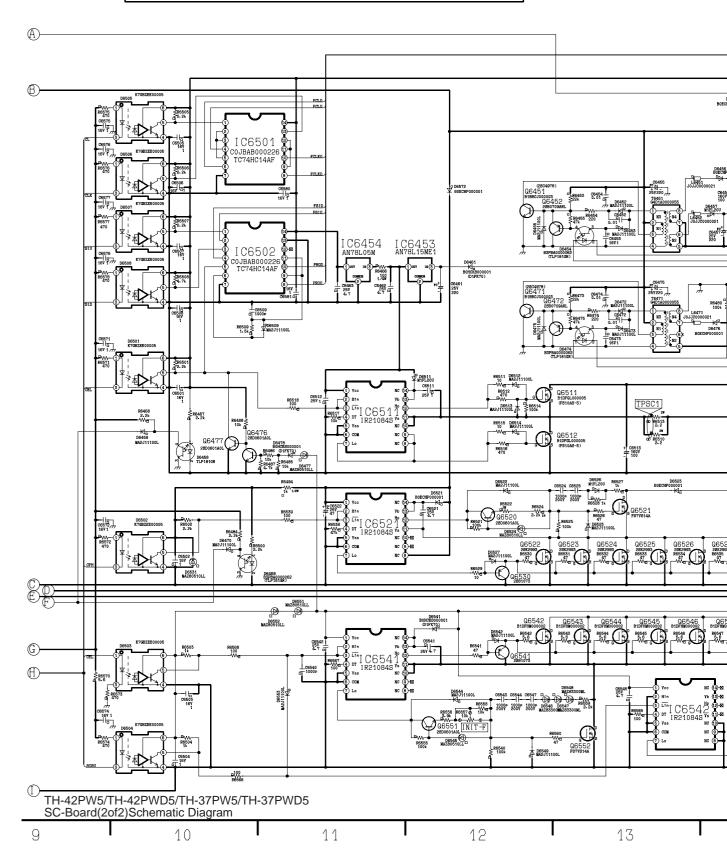




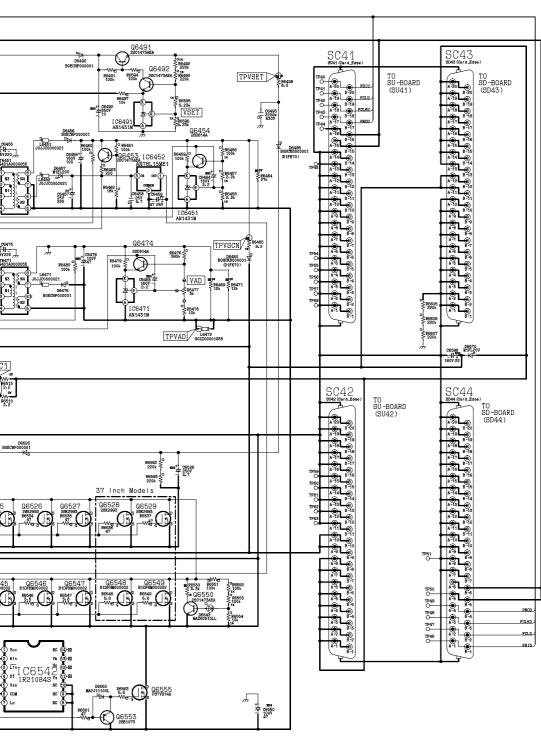



# 14.38. SD-Board Block Diagram

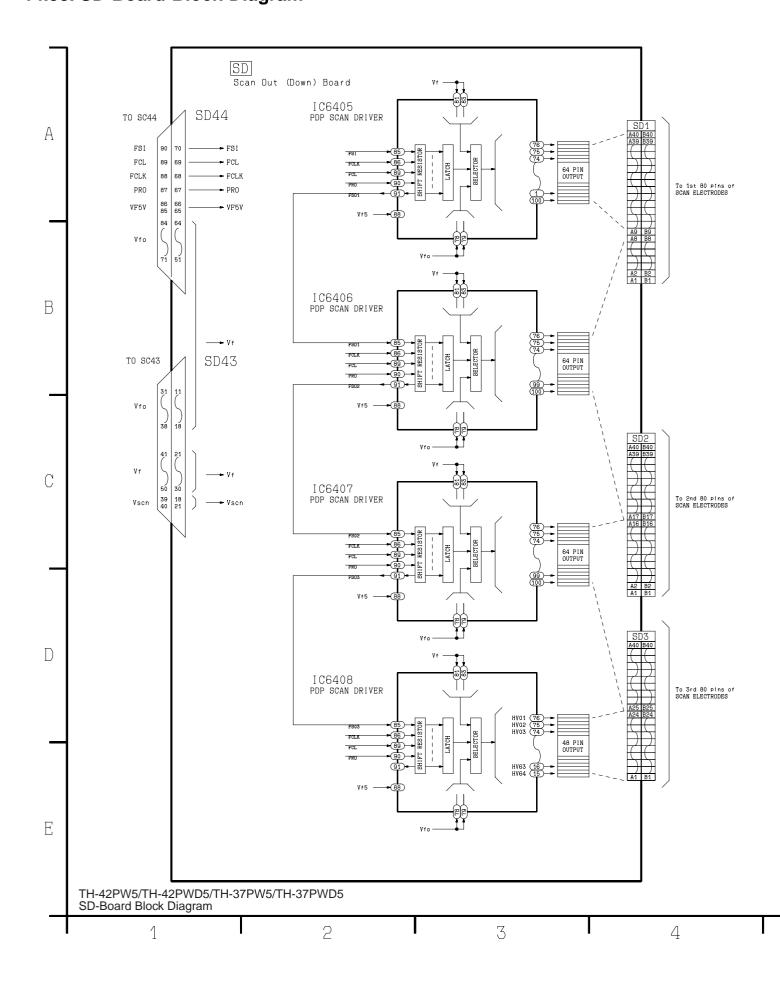

) pins of

O pins of CTRODES


TRODES

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 SD-Board Block Diagram


5 6 7

#### --

## 14.39. SD-Board (42 inch Models) Schematic Diagram

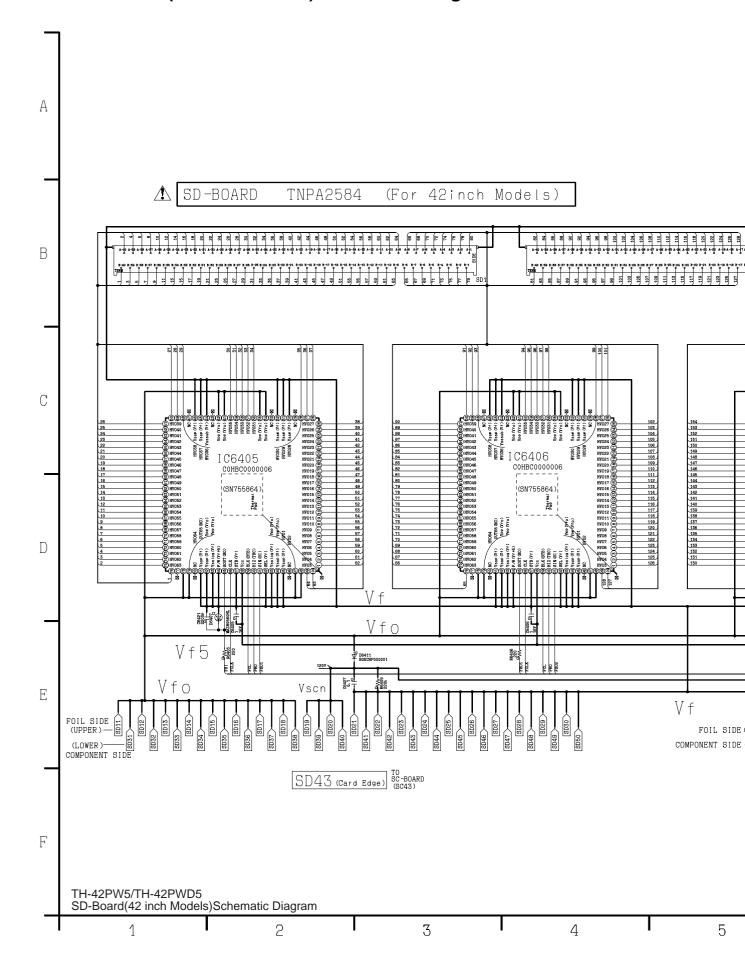




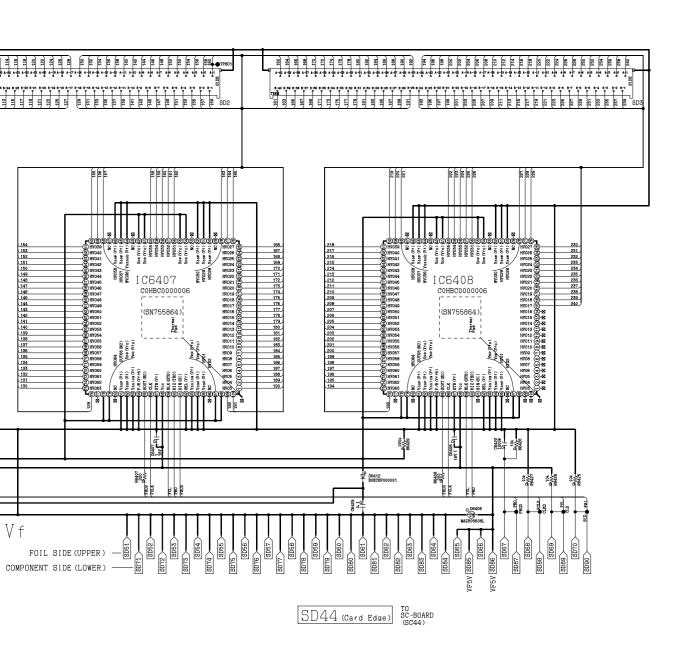





## 14.40. SD-Board (37 inch Models) Schematic Diagram

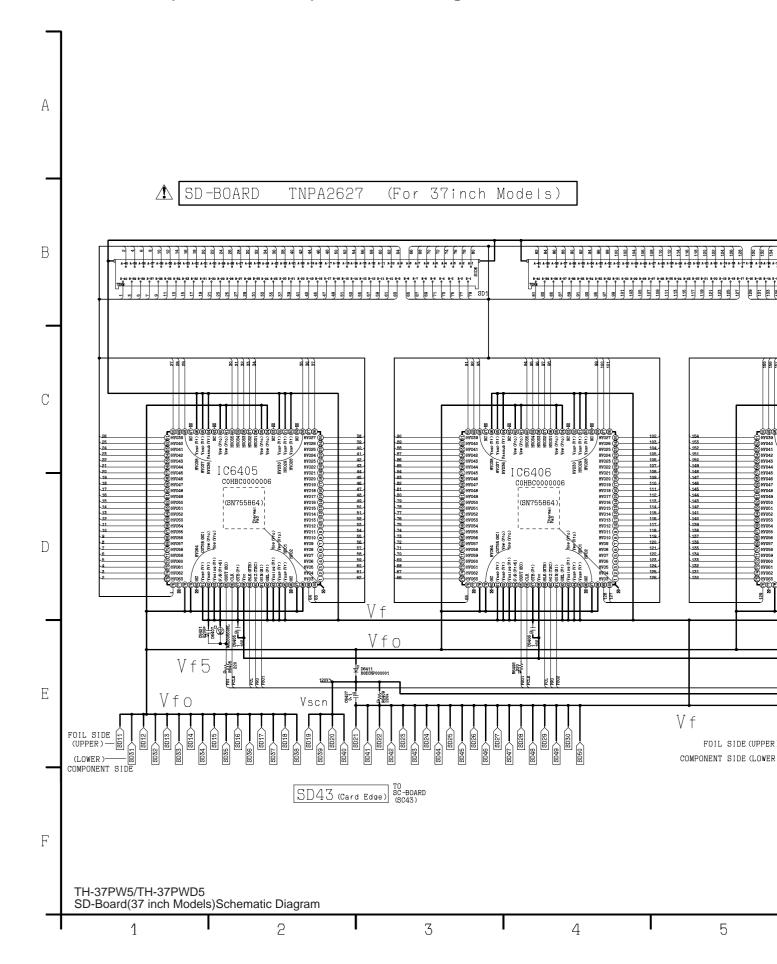




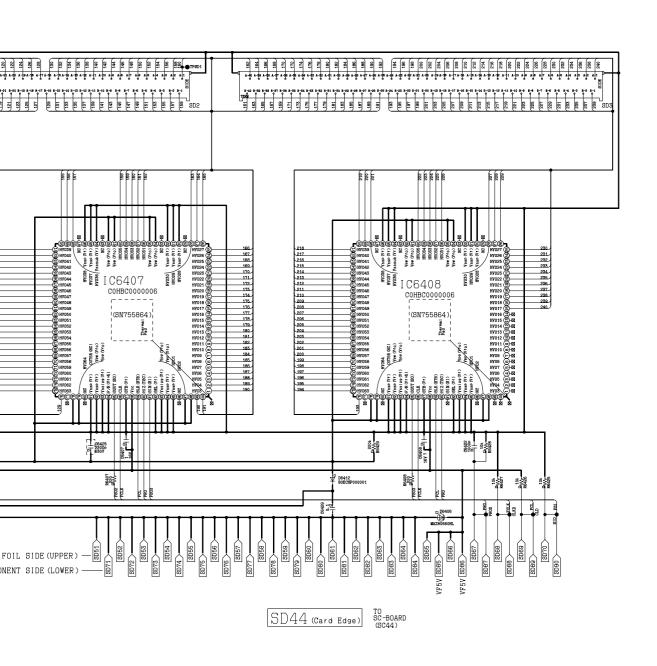



## 14.41. SU-Board Block Diagram

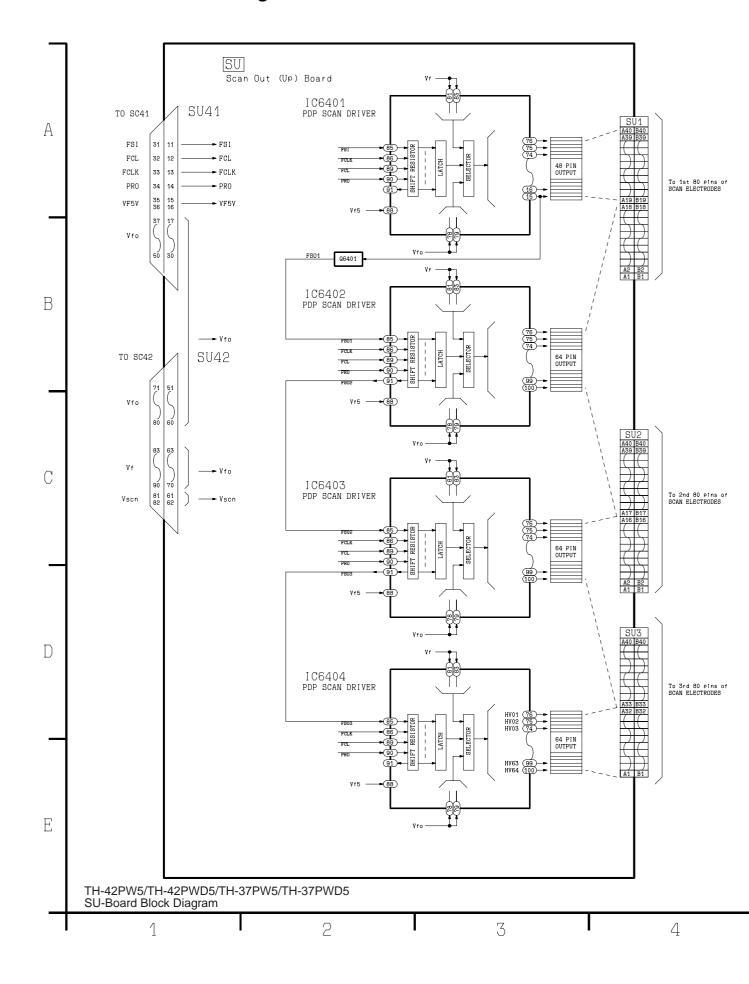

o 1st 80 pins of CAN ELECTRODES

2nd 80 pins of CAN ELECTRODES


3rd 80 pins of CAN ELECTRODES

> TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 SU-Board Block Diagram


4 5 6 7

### ----


## 14.42. SU-Board (42 inch Models) Schematic Diagram

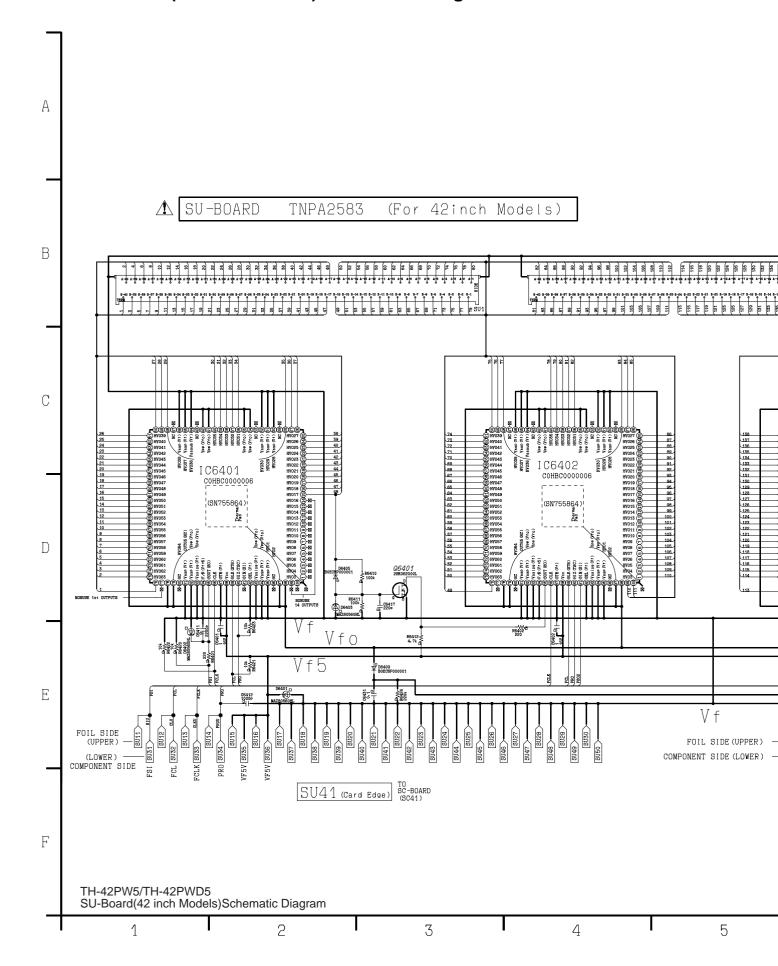




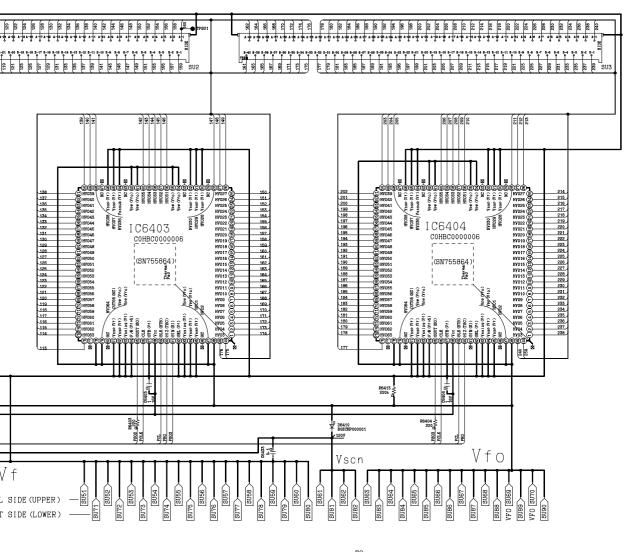


SU42 (Card Edge) TO SC-BOARD (SC42)




## 14.43. SU-Board (37 inch Models) Schematic Diagram

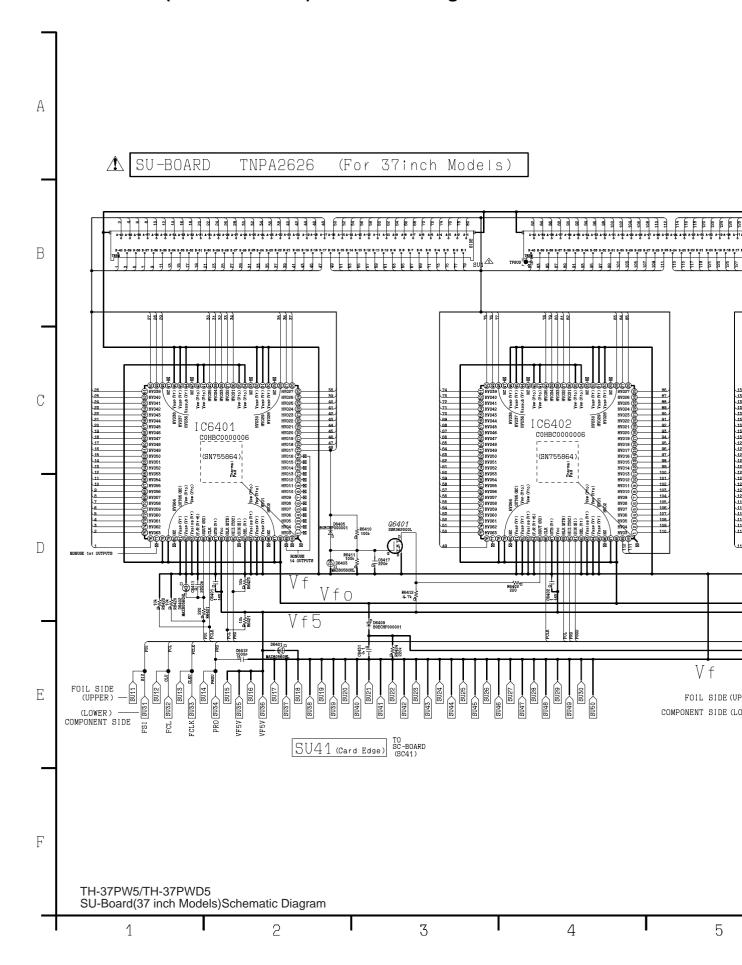



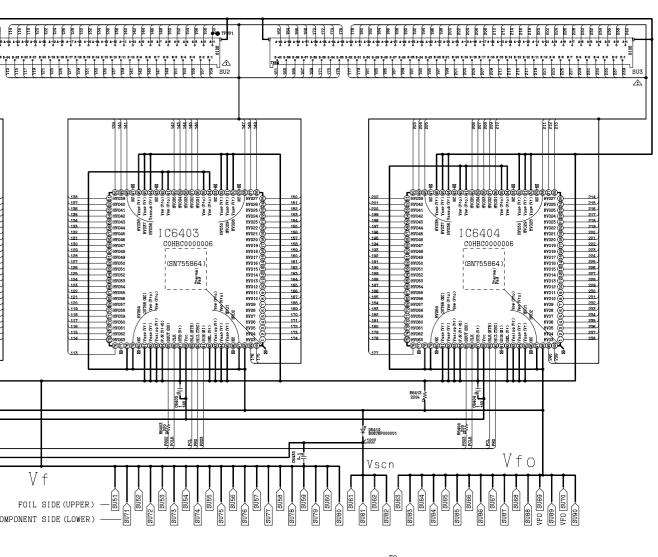


SU42 (Card Edge) TO SC-BOARD (SC42)





### ---


# 14.44. SS-Board Block Diagram

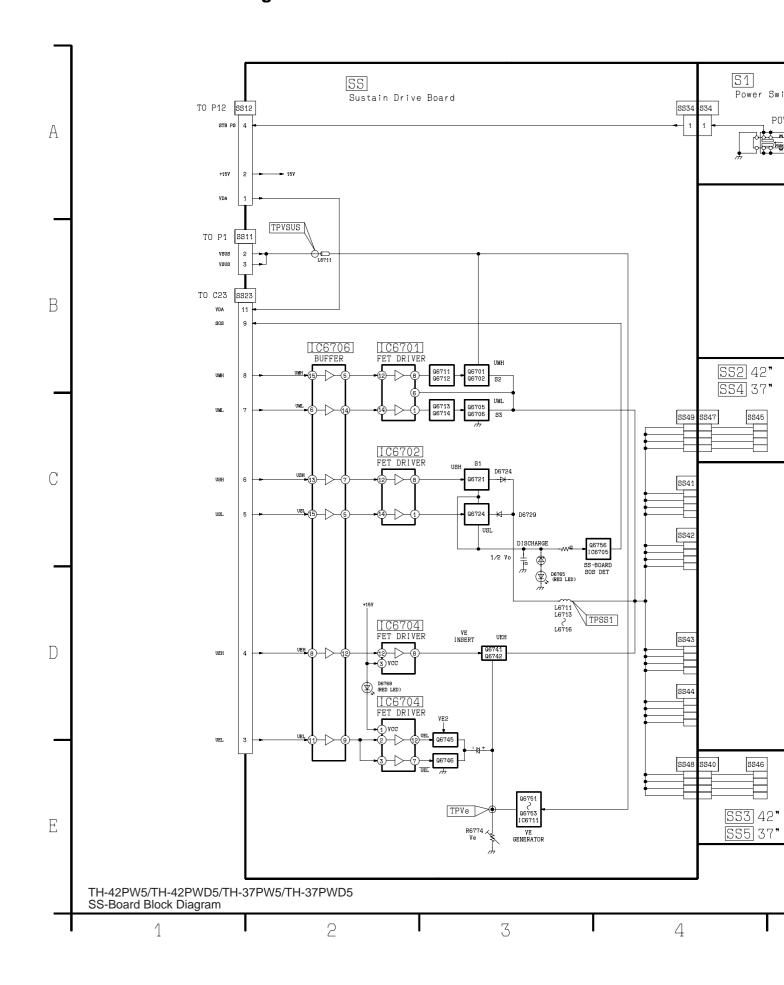











5

TH-42PW5/TH-42PWD5/TH-37PW5/TH-37PWD5 SS-Board Block Diagram


### 14.45. SS, SS2, SS3, SS4, SS5 and S1-Board Schematic Diagram

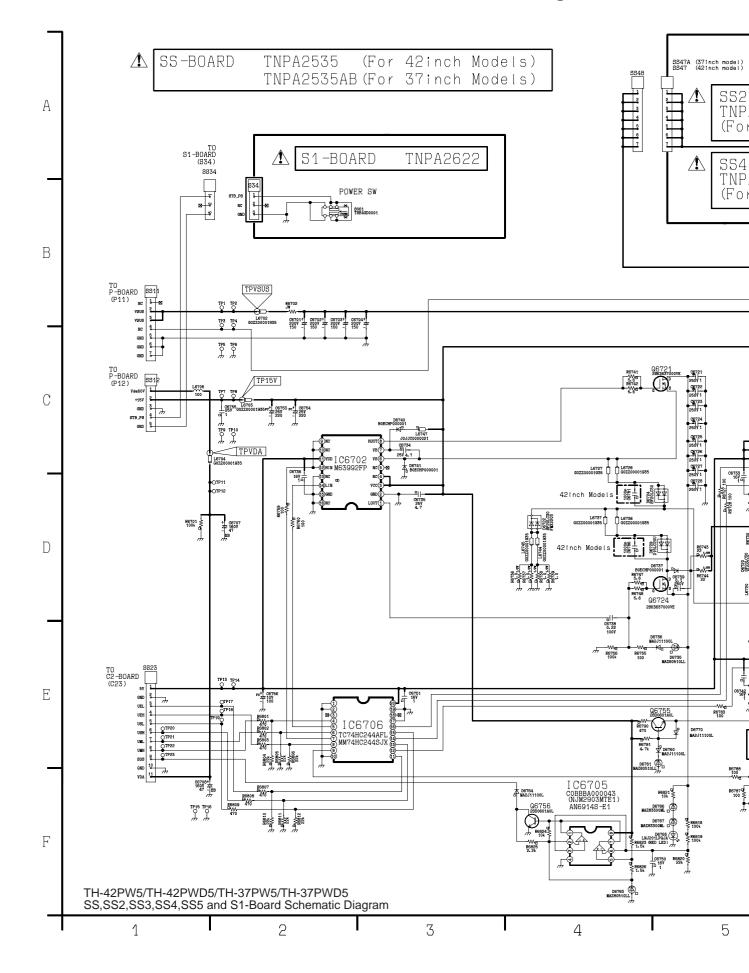




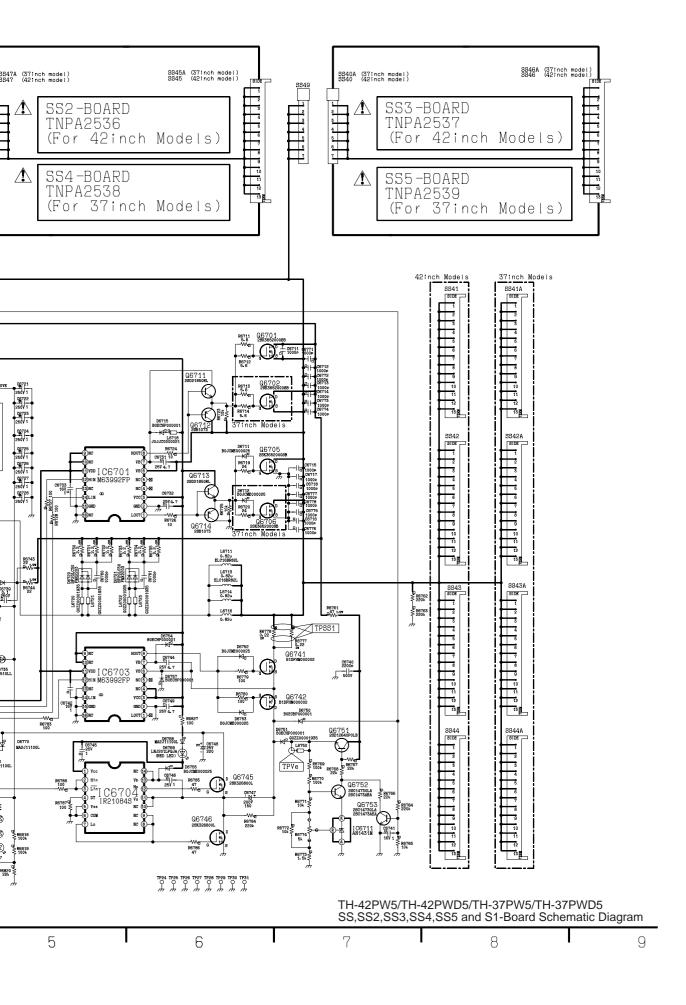

# 14.46. Z-Board Block Diagram

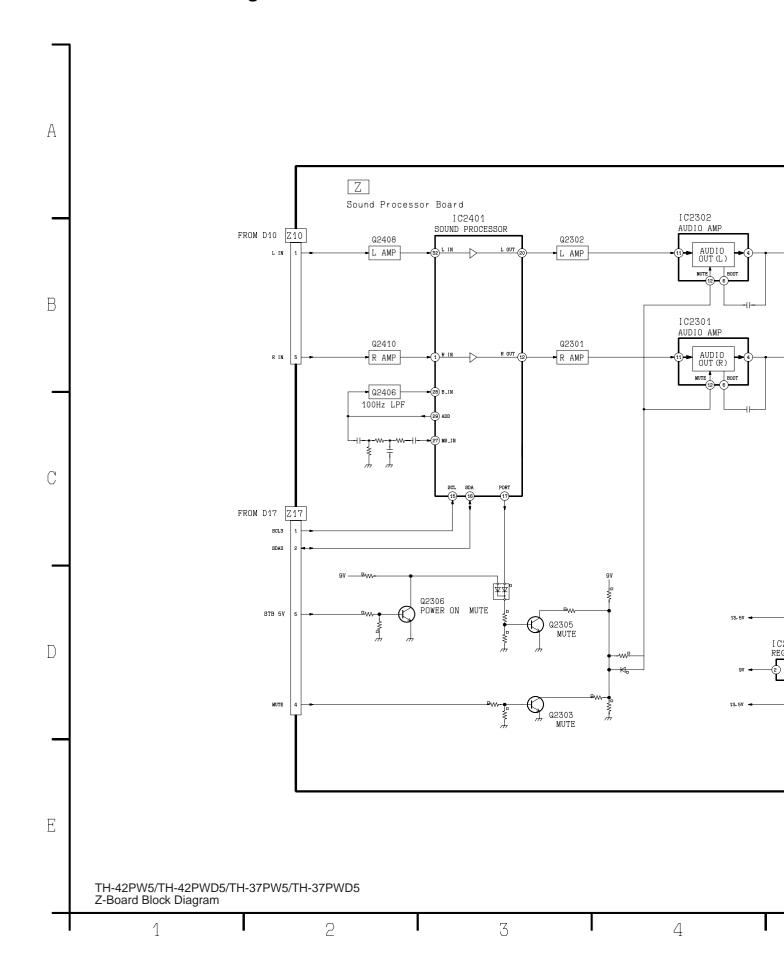




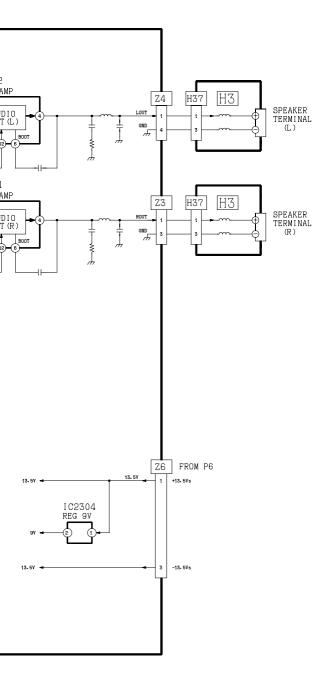





5 6 7

# 14.47. H3 and Z-Board Schematic Diagram

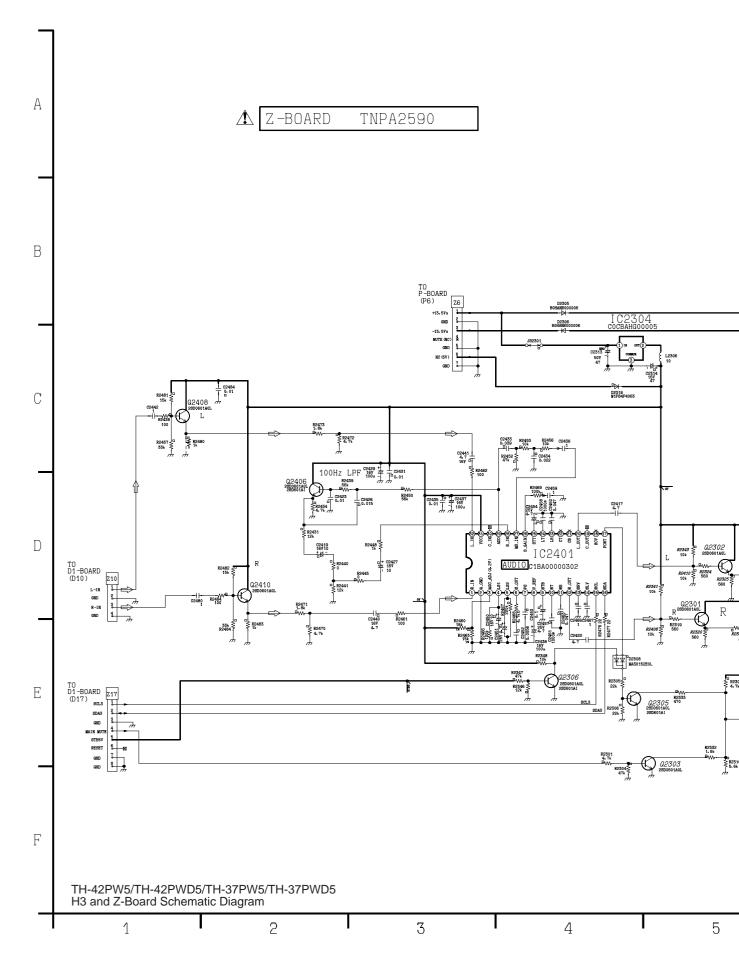



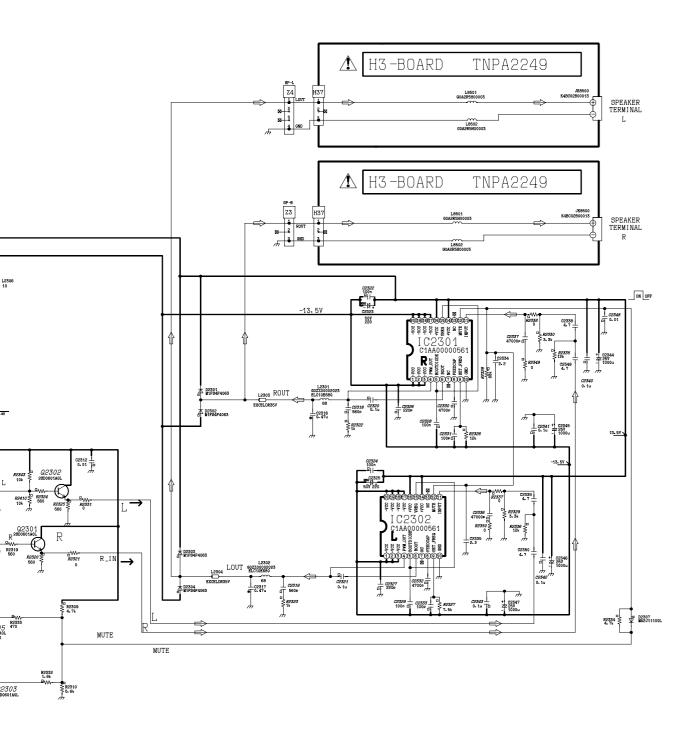



	INPUT	Equipment	Setting	Alignment menu	Procedure
1	NTSC Gray Scale Pattern High light 75% - Low light 15%	Color Analyzer	Picture: Normal White balance: Cool Aspect: 16:9	PANEL W/B G cut off PANEL W/B B cut off R cut off Sub Adjust Sub Bright  PANEL W/B G Drive PANEL W/B B Drive R Drive R,G,B Drive PANEL W/B	<ul> <li>5) If Sub Bright is changed re-adjust it to set Low light to 10 cd/m2.</li> <li>6)Find 75% of white area by color sensor.</li> <li>7) Set G Drive to " E8 ".</li> <li>8) Adjust B and R Drive to set color temperature as shown Fig01.</li> <li>9) Repeat item 4) to 7) to set both Low light and high light.</li> <li>10) Increase same steps of R, G and B Drive to set</li> </ul>
2			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Normal".  2) Repeat procedure 3) to 11) of Cool mode.
3			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Warm".  2) Repeat procedure 3) to 11) of Cool mode.
4			Picture: Normal White balance: Cool Aspect: 16:9		1) Change color templature to "Cool".  2)Re-set Sub bright to "30"

	INPUT	Equipment	Setting	Alignment menu	Procedure
1	PAL Gray Scale Pattern High light 75% - Low light 15%	Color Analyzer	Picture: Normal White balance: Cool Aspect: 16:9	PANEL W/B G cut off PANEL W/B B cut off R cut off Sub Adjust Sub Bright  PANEL W/B G Drive PANEL W/B B Drive R Drive PANEL W/B R,G,B Drive R,G,B Drive PANEL W/B	<ul> <li>5) If Sub Bright is changed re-adjust it to set Low light to 10 cd/m2.</li> <li>6) Find 75% of white area by color sensor.</li> <li>7) Set G Drive to "E8".</li> <li>8) Adjust B and R Drive to set color temperature as shown Fig02.</li> <li>9) Repeat procedure 4) to 7) to set both Low light and high light.</li> <li>10) Increase same steps of R, G and B Drive to set</li> </ul>
2			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Normal".  2) Repeat procedure 3) to 11) of Cool mode.
3			White balance:	PANEL W/B R,G,B cut off PANEL W/B R,G,B Drive	1) Change white balance to "Warm".  2) Repeat procedure 3) to 11) of Cool mode.
4			Picture: Normal White balance: Cool Aspect: 16:9		1) Change color templature to "Cool".  2)Re-set Sub bright to "30"

		Equipment	Setting	Alignment menu	Procedure
5			Picture: Normal Aspect: 16:9		Write down each color temaparature of R,G,B drive and Cut off data as follows.
			White balance: Cool Normal Warm		White Balance Cool Normal Warm R Drive G Drive B Drive R Cut off G Cut off B Cut off
	SECAM signal				<ul><li>2) Input SECAM signal.</li><li>3) Copy PAL R,G,B drive and cut off data of each white balance mode to SECAM position.</li></ul>

	INPUT	Equipment	Setting	Alignment menu	Procedure
1	Component (525i, 525p, 625i, 720i or 1080i)  Gray Scale Pattern  Black 2 % Black 0 %		Picture: Normal White balance: Cool Aspect: 16:9	G cut off B cut off B cut off Chroma Control: Gun off RGB Sub Adjust: G Sub Bright Chroma Control: Gun off RGB Sub Adjust: B Sub Bright Chroma Control: Gun off RGB Sub Adjust:	
2	RGB(PC) Gray Scale Pattern  Black 2 % Black 0 %		White balance:	PANEL W/B R,G,B Drive	1) Change input to RGB signal.  2) Repeat procedure 1) to 7) of Component input signal.

	INPUT	Equipment	Setting	Alignment menu	Procedure
1	PC Gray Scale Pattern High light 75% - Low light 15%	Color Analyzer	Picture: Normal White balance: Cool Aspect: 16:9	PANEL W/B G cut off PANEL W/B B cut off R cut off Sub Adjust Sub Bright  PANEL W/B G Drive PANEL W/B B Drive R Drive PANEL W/B R,G,B Drive PANEL W/B	<ul> <li>5) If Sub Bright is changed re-adjust it to set Low light to 10 cd/m<sub>2</sub>.</li> <li>6)Find 75% of white area by color sensor.</li> <li>7) Set G Drive to " E8 ".</li> <li>8) Adjust B and R Drive to set color temperature as shown Fig03.</li> <li>9) Repeat item 4) to 7) to set both Low light and high light.</li> <li>10) Increase same steps of R, G and B Drive to set</li> </ul>
2			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Normal".  2) Repeat procedure 3) to 11) of Cool mode.
3			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Warm".  2) Repeat procedure 3) to 11) of Cool mode.
4			Picture: Normal White balance: Cool Aspect: 16:9		1) Change color templature to "Cool".  2)Re-set Sub bright to "30"

	INPUT	Equipment	Setting	Alignment menu	Procedure
5			Picture: Normal Aspect: 16:9		Write down each color temaparature of R,G,B drive and Cut off data as follows.
	RGB Gray Scale Pattern High light 75% - Low light 15%		White balance: Cool Normal Warm		White Balance Cool Normal Warm R Drive G Drive B Drive R Cut off G Cut off B Cut off D Cut off B Cut off
6	DVI Gray Scale Pattern  High light 75%  Low light 15%		Picture: Normal Aspect: 16:9 White balance: Cool Normal Warm		1) Write down each color temaparature of R,G,B drive and Cut off data as follows.    White

	INPUT	Equipment	Setting	Alignment menu	Procedure
1	HD (720i or 1080i) Gray Scale Pattern High light 75% - Low light 15%	Color Analyzer	Picture: Normal White balance: Cool Aspect: 16:9	PANEL W/B G cut off PANEL W/B B cut off R cut off Sub Adjust Sub Bright  PANEL W/B G Drive PANEL W/B B Drive R Drive PANEL W/B R,G,B Drive R,G,B Drive PANEL W/B	<ul> <li>5) If Sub Bright is changed re-adjust it to set Low light to 10 cd/m².</li> <li>6) Find 75% of white area by color sensor.</li> <li>7) Set G Drive to "E8".</li> <li>8) Adjust B and R Drive to set color temperature as shown Fig04.</li> <li>9) Repeat item 4) to 7) to set both Low light and high light.</li> <li>10) Increase same steps of R, G and B Drive to set</li> </ul>
2			White balance:	PANEL W/B R,G,B cut off PANEL W/B R,G,B Drive	1) Change white balance to "Normal".  2) Repeat procedure 3) to 11) of Cool mode.
3			White balance:	PANEL W/B	1) Change white balance to "Warm".  2) Repeat procedure 3) to 11) of Cool mode.
4			Picture: Normal White balance: <b>Cool</b> Aspect: 16:9		1) Change color templature to "Cool".  2)Re-set Sub bright to "30"

	INPUT	Equipment	Setting	Alignment menu			Pro	ocedure		
5			Picture: Normal Aspect: 16:9			down each data as fol		aparature of I	R,G,B drive	and
	RGB Gray Scale Pattern  High light 75% - Low light 15%		White balance: Cool Normal Warm		R D G C B C B C 2)Change 3) Copy H	ance Drive Drive Drive Cut off		Normal  and 525p.  lata of each vals position.	Warm	


	INPUT	Equipment	Setting	Alignment menu	Procedure
1	625i Gray Scale Pattern  High light 75%  Low light 15%	Color Analyzer	Picture: Normal White balance: Cool Aspect: 16:9	PANEL W/B G cut off PANEL W/B B cut off R cut off Sub Adjust Sub Bright  PANEL W/B G Drive PANEL W/B B Drive R Drive PANEL W/B R,G,B Drive R,G,B Drive PANEL W/B	<ul> <li>5) If Sub Bright is changed re-adjust it to set Low light to 10 cd/m2.</li> <li>6)Find 75% of white area by color sensor.</li> <li>7) Set G Drive to " E8 ".</li> <li>8) Adjust B and R Drive to set color temperature as shown Fig05.</li> <li>9) Repeat item 4) to 7) to set both Low light and high light.</li> <li>10) Increase same steps of R, G and B Drive to set</li> </ul>
2			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Normal".  2) Repeat procedure 3) to 11) of Cool mode.
3			White balance:	PANEL W/B R,G,B Drive	1) Change white balance to "Warm".  2) Repeat procedure 3) to 11) of Cool mode.
4			Picture: Normal White balance: Cool Aspect: 16:9		1) Change color templature to "Cool".  2)Re-set Sub bright to "30"


	INPUT	Equipment	Setting	Alignment menu	Procedure
1	NTSC Gray Scale Pattern Black 2 % Black 0 %		Picture: Normal Aspect: 16:9		** Adjust at the dark room.  1) Set white balance to Cool.  2) Adjust All cut off to start some pixels emission at black 2% area and no emission at black 0% area.  3) Write down all cut off data.  4) Set white balance to Nornal.  5) Adjust All cut off to set same data of Cool mode.  6) Set white balance to warm.  7) Adjust All cut off to set same data of Cool mode.
2	PAL Gray Scale Pattern  Black 2 % Black 0 %		Picture: Normal Aspect: 16:9		** Adjust at the dark room.  1) Set white balance to Cool.  2) Adjust All cut off to start some pixels emission at black 2% area and no emission at black 0% area.  3) Write down all cut off data.  4) Set white balance to Nornal.  5) Adjust All cut off to set same data of Cool mode.  6) Set white balance to warm.  7) Adjust All cut off to set same data of Cool mode.
	SECAM Gray Scale Pattern				8) Change to SECAM signal.  9) Copy PAL All cut off data to SECAM mode.
3	PC Gray Scale Pattern Black 2 % Black 0 %		Picture: Normal Aspect: 16:9		** Adjust at the dark room.  1) Set white balance to Cool.  2) Adjust All cut off to start some pixels emission at black 2% area and no emission at black 0% area.  3) Write down all cut off data.  4) Set white balance to Nornal.  5) Adjust All cut off to set same data of Cool mode.  6) Set white balance to warm.  7) Adjust All cut off to set same data of Cool mode.
	RGB Gray Scale Pattern  DVI Gray Scale Pattern				<ul><li>8) Change to RGB input signal.</li><li>9) Copy PC All cut off data to RGB mode.</li><li>10) Change to DVI input signal.</li><li>11) Copy PC All cut off data to DVI mode.</li></ul>


	INPUT	Equipment	Setting	Alignment menu	Procedure
4	525i Gray Scale Pattern Black 2 % Black 0 %		Picture: Normal Aspect: 16:9		** Adjust at the dark room.  1) Set white balance to Cool.  2) Adjust All cut off to start some pixels emission at black 2% area and no emission at black 0% area.  3) Write down all cut off data.  4) Set white balance to Nornal.  5) Adjust All cut off to set same data of Cool mode.  6) Set white balance to warm.  7) Adjust All cut off to set same data of Cool mode.
	525p Gray Scale Pattern HD (720i or 1080i) Gray Scale Pattern				<ul><li>8) Change to 525p signal.</li><li>9) Copy 525i All cut off data to 525p mode.</li><li>8) Change to HD signal.</li><li>9) Copy 525i All cut off data to HD mode.</li></ul>
5	625i Gray Scale Pattern  Black 2 % Black 0 %		Picture: Normal Aspect: 16:9		<ul> <li>** Adjust at the dark room.</li> <li>1) Set white balance to Cool.</li> <li>2) Adjust All cut off to start some pixels emission at black 2% area and no emission at black 0% area.</li> <li>3) Write down all cut off data.</li> <li>4) Set white balance to Nornal.</li> <li>5) Adjust All cut off to set same data of Cool mode.</li> <li>6) Set white balance to warm.</li> <li>7) Adjust All cut off to set same data of Cool mode.</li> </ul>

### How to access the Option menu



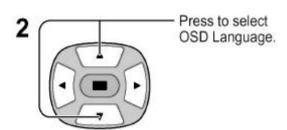



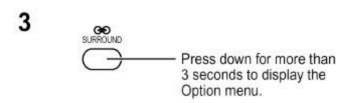

### Setting the Option menus

